

Relations hôtes – parasites zoonotiques: diversité, aspects évolutifs et implications épidémiologiques. Le cas de la leptospirose dans les îles du sud-ouest de l'océan Indien

Yann Gomard

▶ To cite this version:

Yann Gomard. Relations hôtes – parasites zoonotiques: diversité, aspects évolutifs et implications épidémiologiques. Le cas de la leptospirose dans les îles du sud-ouest de l'océan Indien. Maladies infectieuses. Université de la Réunion, 2015. Français. NNT: 2015LARE0029. tel-01326943

HAL Id: tel-01326943 https://theses.hal.science/tel-01326943

Submitted on 6 Jun 2016

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.







Rapporteur

Université de La Réunion

THESE

Pour l'obtention du grade de

DOCTEUR D'UNIVERSITE

Doctorat Sciences du Vivant

Spécialité: Microbiologie

Ecole Doctorale (542) : Sciences Technologies Santé

Relations hôtes-parasites zoonotiques:

Diversité, aspects évolutifs et implications épidémiologiques.

Le cas de la leptospirose dans les îles du Sud-ouest de l'Océan Indien

Présentée et soutenue publiquement par

Yann Gomard

Le 08 Décembre 2015, devant le Jury composé de :

Directeur de Recherche, CNRS, Montpellier

Jean-François COSSON	Directeur de Recherche, INRA, Montferrier-sur-Lez	Rapporteur	
Steven M. GOODMAN	MacArthur Field Biologist, Field Museum de Chicago	Evominatour	
Steven M. GOODMAN	Professeur, Université d'Antananarivo	Examinateur	
Vincent HERBRETEAU	Chargé de Recherche, IRD, Université de Guyane,	Examinateur	
VINCENT HERBRETEAU	Université de Montpellier et Université de La Réunion	Examinateur	
Sébastien JAQUEMET	Professeur, Université de La Réunion	Examinateur	
Koussay DELLAGI	Professeur de médecine à l'Université de Tunis, Institut Pasteur	Directeur de thèse	
Pablo TORTOSA	Maître de Conférence, Université de La Réunion	Co-directeur de thèse	

Laboratoires de Recherche:

Serge MORAND

CRVOI: Centre de Recherche et de Veille sur les maladies émergentes dans l'Océan Indien (2007-2015).

UMR PIMIT: Unité Mixte de Recherche, Processus Infectieux en Milieu Insulaire Tropical INSERM U1187, CNRS 9192, IRD 249, Université de La Réunion.

Avant-propos

La présente thèse, débutée en Octobre 2012, a été réalisée au sein de l'Ecole Doctorale Sciences Technologies Santé de l'Université de La Réunion (ED 542) et a été financée par une allocation du Ministère de l'Enseignement Supérieur et de la Recherche. La majeure partie des travaux s'est effectuée au Centre de Recherche et de Veille sur les maladies émergentes dans l'Océan Indien (CRVOI) situé sur la plateforme de Recherche CYROI (Sainte Clotilde, La Réunion). Depuis 2015, le CRVOI a intégré l'UMR PIMIT (Processus Infectieux en Milieu Insulaire Tropical, Université de La Réunion INSERM U 1187, CNRS 9192, IRD 249).

Les recherches ont été menées grâce au support financier de différents programmes du Fond Européen de Développement Régional - Programme Opérationnel de Coopération Territoriale Réunion (FSOI #31189, LeptOI #32913 et ParamyxOI #33857) mais aussi au programme ECOSAN/CNR-INEE "BatMan" et à une subvention de l'Agence Régionale de Santé de la région Océan Indien (ARS-OI).

Au cours de mon travail de thèse, les missions de terrain ont été effectuées dans différentes îles de la région mais principalement à Madagascar. Les institutions, organisations et partenaires des pays ayant rendu possible ces travaux, fourni les permis de recherche, de collecte et d'exportation des échantillons sont cités dans les publications.

Remerciements

Une thèse c'est une Aventure! Ces trois dernières années, j'ai fait la rencontre de personnes qui ont enrichi et contribué à ma thèse, la rendant ainsi inoubliable. Je tiens ici à les en remercier car grâce à elles j'ai pu vivre une Grande Aventure! Merci.

Je tiens tout d'abord à adresser mes sincères remerciements à mes deux directeurs de thèse : le Pr. Koussay Dellagi et le Dr. Pablo Tortosa. Avec eux, j'ai reçu un encadrement de qualité et surtout j'ai beaucoup appris autant sur le plan scientifique et que sur le plan humain.

Merci Koussay pour votre encadrement, votre disponibilité, vos conseils et vos remarques toujours très très intéressantes !

Merci Pablo d'avoir toujours été présent pour moi tout au long de cette thèse! Il y a près de 5 ans maintenant en répondant à ton offre de stage sur les insectes je ne pensais pas que j'irai jusqu'à faire une thèse et pourtant la vie nous réserve bien des surprises! Merci de m'avoir donné l'opportunité de faire cette thèse! Merci tout simplement de m'avoir transmis cette vision de la Recherche.

Je remercie le Dr. Patrick Mavingui qui à peine arrivé s'est investi sans compter dans la fin de ma thèse, merci pour vos relectures, corrections et encouragements.

Je remercie le Dr. Serge Morand et le Dr. Jean-François Cosson d'avoir accepté d'évaluer ce travail en tant que rapporteurs.

Je remercie, le Pr. Steven M. Goodman, le Pr. Sébastien Jaquemet et le Dr. Vincent Herbreteau d'avoir accepté de faire partie des membres de ce jury de thèse.

Cette thèse est le fruit d'une étroite collaboration avec l'Association Vahatra de Madagascar. Je tiens sincèrement à remercier les différents membres qui ont rendu possible ces travaux.

J'adresse un très grand remerciement au Pr. Steven M. Goodman. Merci Steve pour toutes ces missions de terrain qui ont été très enrichissantes, j'ai énormément appris scientifiquement mais aussi humainement. Merci de m'avoir fait découvrir Madagascar, le pays de mes ancêtres et surtout un très grand merci de m'avoir accueilli au sein de ta famille.

Merci au Dr. Voahangy Soarimalala, au Pr. Achille Raselimanana, au Dr. Marie Jeanne Raherilalao, à Madame Malalarisoa Razafimpahanana pour votre accueil toujours chaleureux au sein de Vahatra et les bons moments sur le terrain.

Un grand merci à Beza Ramasindrazana! Merci Beza pour toutes ces aventures, je me

souviendrai toujours de notre périple au Parc National Tsingy de Bemaraha, conclusion : Il faut toujours avoir un GPS!

Merci à Lédada pour ces bons petits plats sur le terrain!

Je tiens à remercier Séverine Licciardi et Erwan Lagadec qui ont été là dès mes débuts de stagiaire de Master 2. Merci Séverine pour « la formation simulies » et bien d'autres techniques de laboratoire. Grâce à toi maintenant je remarque même les plus petits insectes et j'apprends à les apprécier (sauf les cafards)! Merci aussi pour tes précieux conseils et ton humour (noir)!

Erwan ... Erwan depuis la clio à Pablo à capturer des insectes avec un filet à papillon sur toute l'île, en passant par Maurice, les Seychelles et le Mozambique (avec Mister Gildas), que d'aventures que nous avons vécu ensemble et j'espère qu'il y en aura plein d'autres! Erwan tu as toujours été là pour moi et je t'en suis sincèrement reconnaissant.

J'ai une pensé particulière pour le Dr. Alain Michault qui nous a quitté récemment avec qui j'ai eu l'occasion de travailler.

Merci à l'équipe du GHSR Sud (Parasitologie, Bactériologie, Virologie et Hygiène) de m'avoir accueilli et enseigné l'art du MAT. Merci particulièrement à Géraldine, Ketty, Guillaume et Florelle.

Julien, merci car ça n'aurait pas été la même chose sans toi. Comme tu le dis on a fait nos thèses ensemble, on a broyé ensemble, on a travaillé sur les mêmes échantillons ensembles, on a fait des conférences ensemble ... En tous cas ça a été un plaisir de faire ce bout de chemin avec toi : depuis les commandes du laboratoire ... jusqu'aux nuits blanches! Je te souhaite bon vent et le meilleur pour la suite mon Ami! Je te souhaite devenir un très grand chercheur et j'espère que nos chemins se croiseront encore! Allez maintenant un petit galopin?

Claire, merci tu as toujours su nous remonter le moral! Je te remercie pour ton aide et surtout de m'avoir fait rappelé qu'un stylo et un papier étaient largement plus efficaces que de rester « planter » devant son écran d'ordinateur!

Je remercie les post docs et les chercheurs auprès de qui j'ai beaucoup appris et qui m'ont fait progresser durant ces dernières années: Najla D., Muriel D., Camille L., David W., Célestine A., Sarah T., Mathieu S., Hervé P., Catherine S., Josselin Cornuault, un merci particulier au Pr. Ara Monadjem. Je remercie aussi Nicolas Wieseke et Olivier Florès qui m'ont aidé et apporté leurs expertises pendant cette thèse, j'espère que nous aurons encore

beaucoup de collaborations. Je remercie également Laurence Humeau et Johanna Clémencet pour leurs expertises sur les présentations orales (③). Merci aussi à Wildriss pour les conseils de laboratoire et les dépannages de produits !

Merci Gildas pour ces moments de terrain uniques au Mozambique et aux Seychelles! Bonne chance dans tes projets! Je croise les doigts!

Un grand merci à Virginie, Marina et Françoise pour leurs bonnes humeurs et surtout leurs patiences pour mes débâcles administratives !

Je n'oublie pas le bureau du fond à coté des cartons, « le bureau des sardines », je remercie les personnes qui y ont résidé: Magali, Damien, Beza, Lizah, Claire B, (Merci pour les stats et les cartes !), Matthieu R., Laura A, Aude, Camille S. ... et j'en oublie désolé. Merci à tous les stagiaires et oui il y en a eu beaucoup !

Merci aux derniers arrivant dans le bureau des sardines : Léon, Miora, Etienne et Colette (même si elle n'est pas dans le bureau, enfin pas encore ...). Merci de m'avoir supporté durant ces derniers mois. Bon courage dans vos thèses respectives.

Je remercie tous les amis, les personnes avec qui j'ai pu échangé que ce soit dans les labos, dans les bureaux, au détour d'un bon café ou sur le terrain. Je ne vais pas commencer à faire une liste car elle serait aussi grande que la thèse et j'ai peur d'en oublier! Merci!

Je remercie « nos voisins », Solène et Sébastien pour leurs encouragements !

Je remercie aussi mes amis de long date, qui ont toujours été là et prêts à m'épauler : Benoit, Victor, Morguen et Tristan. Merci pour tout.

Je remerciement tout particulièrement les membres de ma famille qui m'ont toujours poussé et aidé à aller de l'avant. Merci pour votre soutien et votre présence. Merci. Je n'oublie pas ma belle famille qui m'a aussi beaucoup aidé! Merci.

Je remercie ma mère qui m'a laissé toute liberté dans le choix de mes études. Merci maman, merci pour tout ! J'ai aussi une pensée pour ma sœur et mon frère. Bon courage dans vos parcours respectifs, il ne faut jamais baisser les bras!

Frédérique, je te remercie pour ta patience sans faille, ton soutien dans les moments difficiles et ton Amour. Merci.

Bonne lecture, Yann

Résumé

La leptospirose est considérée comme la zoonose la plus répandue au monde mais les incidences sont les plus élevées dans les régions tropicales et en particulier sur les îles. Les îles du Sud-ouest de l'Océan Indien (SOOI) ne dérogent pas à la règle puisque la maladie y représente un problème de santé humaine majeur sur plusieurs îles, notamment aux Seychelles qui enregistrent un des plus fort taux d'incidence humaine au monde. Sur la base des données disponibles, l'épidémiologie humaine apparait contrastée à l'échelle de la région : les cas cliniques sur Mayotte résultent d'infections par quatre espèces de leptospires distinctes alors qu'à La Réunion ou aux Seychelles, une seule espèce est à l'origine de la grande majorité des cas cliniques. L'objectif général de cette thèse est d'identifier certains des déterminants de cette épidémiologie singulière.

Nous avons dans un premier temps complété les informations humaines en investiguant la leptospirose en Union des Comores, pays n'ayant jamais rapporté de transmission autochtone. Nos résultats indiquent que les populations humaines y sont exposées à des antigènes de leptospires comparables à ceux retrouvés sur l'île voisine de Mayotte. Ce résultat suggére que l'absence de leptospirose sur certaines îles est le résultat d'un déficit de surveillance. Nous avons ensuite caractérisé la diversité génétique des leptospires au sein de la faune de certaines îles, caractérisées par des niveaux d'endémisme élevés à même d'être en partie à l'origine de cette épidémiologie contrastée. Nous décrivons d'une part une importante diversité des leptospires pathogènes chez les chauves-souris (Chiroptères) malgaches. Nous montrons d'autre part que cette diversité de leptospires n'est pas structurée géographiquement mais présente au contraire une importante spécificité d'hôte, résultant de différents processus évolutifs incluant co-spéciation et host-switch. Nous avons exploité cette spécificité d'hôte pour éclairer l'épidémiologie de la leptospirose à Mayotte, où nous montrons que l'importante diversité bactérienne impliquée dans les cas cliniques résulte de la présence de nombreux réservoirs, dont certains originaires de Madagascar.

Ainsi, il apparaît que l'épidémiologie humaine de la leptospirose dans le SOOI est le reflet d'assemblages distincts de leptospires cosmopolites et autochtones/endémiques maintenus et excrétés par des réservoirs animaux particuliers.

Mots clés: Leptospirose, *Leptospira*, Chiroptères, petits mammifères, associations hôtesparasites, MAT, MLST, co-phylogénie, Madagascar, Mayotte, Union des Comores, Sud-ouest de l'Océan Indien.

Abstract

Leptospirosis is considered as the most widespread zoonosis worldwide but the incidence levels are higher in tropical regions and particularly on islands. The South-western Indian Ocean (SWOI) islands are no exception and the disease is of major medical concern on several islands notably in Seychelles, displaying one of the highest human incidence rates ever reported. Based on available data, human epidemiology appears to be different across the region: on Mayotte, human cases result from the infection with four distinct *Leptospira* species whereas on Reunion Island or Seychelles, a single species causes the majority of clinical cases. The main objective of this thesis is to identify some of the drivers of this singular epidemiology.

We first completed information in the region available on this human disease by investigating the leptospirosis situation in the Union of the Comoros, a country where no autochthonous transmission has been reported to date. Our results indicate that Comorian populations are exposed to *Leptospira*, which are antigenically comparable to those detected in the neighbouring island of Mayotte. This finding suggests that the apparent absence of leptospirosis on some islands simply reflects a lack of medical surveillance. We then investigated the genetic diversity of Leptospira on distinct islands home to distinct endemic animal species that may shed distinct *Leptospira* lineages and, thus, at least in part explain the contrasted epidemiology of leptospirosis across the region. Specifically, we describe a high diversity of pathogenic Leptospira within Malagasy bats (Chiroptera) and further show that Leptospira diversity is not structured by geography. Instead, we show that these Leptospira display a strong specificity towards their hosts, which may result from different evolutionary processes including co-speciation and host-switch. Using this tight host specificity, we investigated the leptospirosis epidemiology on Mayotte, where we show that the important bacterial diversity reported in clinical cases is due of the presence of several distinct animal species acting as reservoirs, some of which were introduced from the neighbouring Madagascar.

Altogether, the results presented herein, including data produced by our lab, suggest that the epidemiology of leptospirosis in the SWOI results from distinct assemblages of cosmopolitan and autochthonous/endemic *Leptospira*.

Keywords: Leptospirosis, *Leptospira*, Chiroptera, small mammals, hosts-parasites associations, MAT, MLST, co-phylogeny, Madagascar, Mayotte, Union of Comoros, Southwestern Indian Ocean.

Sommaire

Introduction	1
1. Les maladies infectieuses (ré)-émergentes	2
2. Les zoonoses et leur contrôle	
3. La leptospirose et les leptospires	7
3.1. La leptospirose : une maladie ré-émergente et négligée	7
3.2. Les leptospires	8
3.2.1. Systématique et biologie	8
3.2.2. Classification des leptospires	
3.2.3. Les génomes de leptospires	
3.2.4. Cycle de transmission	
3.3. La leptospirose humaine	
3.3.1. Les différentes formes de la maladie	
3.3.2. Le diagnostic biologique	
3.3.3. Traitements	
3.4. La leptospirose animale	
3.5. Associations hôtes-leptospires	
3.6. Etude de la leptospirose dans les îles	
4. La leptospirose dans les îles du Sud-ouest de l'Océan Indien	
5. Déterminants de l'épidémiologie de la leptospirose dans le SOOI	
6. Objectifs des travaux de thèse	26
Chapitre I : La leptospirose en Union des Comores	29
1. L'Union des Comores : indemne de leptospirose humaine ?	
2. Article 1: Serologic evidence of Leptospirosis in humans,	
Union of the Comoros, 2011	32
3. Résultats majeurs	36
Chapitre II : Les leptospires et les chiroptères de la région du SOOI	37
1. Les leptospires des chauves-souris d'Union des Comores et de Madagascar	
2. Article 2: Pathogenic <i>Leptospira</i> spp. in bats, Madagascar	
and Union of the Comoros	40
3. Résultats majeurs	
Chapitre III : Associations hôtes-leptospires et évolution des leptospires	
au sein de leurs hôtes	
1. Le cas des leptospires pathogènes des chauves-souris de Madagascar	47
2. Article 3: Malagasy bats shelter a considerable diversity of pathogenic <i>Leptospira</i>	
displaying a strong host-specifity pattern	49
3. Résultats majeurs	109
Chapitre IV : Implication des leptospires de la faune de Mayotte	
dans l'épidémiologie de la leptospirose humaine	111
1. La leptospirose à Mayotte	
2. Article 4: An introduced wild mammal species (<i>Tenrec</i> : Tenrecidae)	
to Mayotte Island, western Indian Ocean, is an important reservoir	
of the human pathogenic <i>Leptospira mayottensis</i>	114
3. Résultats majeurs	

Discussion, conclusions et perspectives	139
Discussion et conclusions	141
1. La leptospirose en Union des Comores	141
2. Diversité et structuration des leptospires pathogènes chez les chiroptères	142
2.1. Diversité d'espèces hôtes et diversité de leptospires	142
2.2. Structuration des leptospires par espèces hôtes	143
3. Evolution des leptospires au sein de leurs hôtes : le cas des leptospires	
des chiroptères de Madagascar	145
4. Epidémiologie de la leptospirose humaine dans le SOOI	147
Perspectives	150
Références bibliographiques	154
Valorisations scientifiques	166
•	

Liste des figures

Figure 1	. Illustration de cinq étapes à travers lesquelles un pathogène d'origine animale va évoluer et se retrouver dans un cycle strictement confiné à l'Homme	
Figure 2	. Image de Leptospira interrogans souche RGA	8
Figure 3	. Phylogénie de 21 espèces de leptospires basée sur la séquence complète de l'ARN ribosomique 16S	0
Figure 4	Diagramme de Venn montrant le nombre de gènes uniques et partagés parmi Leptospira interrogans, L. borgpetersenii et L. biflexa	3
Figure 5	. Cycle de transmission des leptospires	4
Figure 6	La nature biphasique de la leptospirose	5
Figure 7	Les îles de la région du Sud-ouest de l'Océan Indien.	21
Figure 8	Facteurs pouvant expliquer l'épidémiologie contrastée de la leptospirose dans le Sud-ouest de l'Océan Indien	
Figure 9	Situation géographique de l'archipel des Comores : Union des Comores (Grande Comore, Mohéli et Anjouan) et Mayotte (France)	31
Figure 1	0. Sérogroupes des leptospires détectés dans les populations humaines des îles de l'archipel des Comores	
Figure 1	1. Evènements évolutifs dans les associations hôtes-parasites	19
Figure 1	2. Les évènements uniques de colonisation des 4 ancêtres de mammifères placentaires à l'origine de la diversité des mammifères terrestres endémiques de Madagascar	15
Figure 1	3. Synthèse des données produites permettant de comprendre en partie l'épidémiologie de la leptospirose dans les îles du Sud-ouest de l'Océan Indien	

Liste des tableaux

Tableau 1. Correspondances entre sérogroupes et génomo-espèces de leptospires (Leptospira)	11
Tableau 2. Exemples d'animaux réservoirs de certains serovars de leptospires	. 19

Liste des abréviations

ADN: Acide DésoxyriboNucléique

AFLP: Amplified Fragment Length Polymorphism

ARN: Acide RiboNucléique

ARNr 16S: ARN ribosomique 16S

CDC: Centers for Disease Control and Prevention

CNR de la Leptospirose : Centre National de Référence de la Leptospirose

CRVOI : Centre de Recherche et de Veille sur les maladies émergentes dans l'Océan Indien

DMSO: Dimethyl Sulfoxide

DySIIs: Dynamique des Sytèmes Infectieux Insulaires

ELISA: Enzyme-Linked Immunosorbent Assay

EMJH: Ellinghausen-McCullough-Johnson-Harris

GIEC: Groupe d'Experts Intergouvernemental sur l'Evolution du Climat

LERG: Leptospirosis Burden Epidemiology Reference Group

LPHS: Leptospirosis-associated Pulmonary Haemorrhage Syndrome

LPS: Lipopolysaccharide

IgG: Immunoglobulines de type G

IgM: Immunoglobulines de type M

MAT: Test de Micro Agglutination (Microscopic Agglutination Test)

Mb: Mégabases

MERS: Le Syndrome Respiratoire du Moyen-Orient (Middle East Respiratory Syndrome)

MLST: Multi Locus Sequence Typing

MLVA: Muli Locus Variable number of tandem repeats Analysis

NCID: National Center for Infectious Diseases

PNLP: Programme National de Lutte contre le Paludisme (en Union des Comores)

PCR: Polymerase Chain Reaction

PFGE: Pulsed Field Gel Electrophoresis

RT-PCR: Real Time-Polymerase Chain Reaction

SIDA: Syndrome d'Immunodéficience Acquise

SRAS: Syndrome Respiratoire Aigu Sévère

SPHS: Severe Pulmonary Hemorrhagic Syndrome

SOOI : Sud-ouest de l'Océan Indien

UMR PIMIT : Unité Mixte de Recherche, Processus Infectieux en Milieu Insulaire

Tropical


UN: United Nations

VIH: Virus de l'Immunodéficience Humaine

VFVR: virus de la Fièvre de la vallée sur Rift

WHO: World Health Organization

5-FU: 5-fluoro-uracile



1. Les maladies infectieuses (ré)-émergentes

Les maladies infectieuses représentent un problème de santé publique majeur et sont impliquées dans plus d'un quart des 57 millions de décès annuel dans le monde (Morens *et al.* 2004). Les maladies dites "émergentes" (ou "ré-émergentes") constituent une partie non négligeable de ces maladies infectieuses et se définissent comme étant des infections nouvellement apparues dans une zone géographique, ou déjà existantes mais dont les incidences et/ou la distribution géographique augmentent rapidement (Morens *et al.* 2004). Les épisodes d'émergence sont influencés par des facteurs qui affectent l'exposition et par conséquent la transmission des pathogènes dans les populations humaines, animales¹ ou végétales (Cohen 2000). L'investigation de ces facteurs d'émergence fait l'objet d'un nombre croissant d'études qui viendront probablement éclairer des concepts dont certains sont encore aujourd'hui controversés car basés sur un corpus d'études encore limité. Néanmoins, la croissance démographique et les perturbations au moins en partie liées à l'intensification des activités humaines sont considérées comme facilitant les émergences. Nous dressons ci-après une liste non exhaustive de ces facteurs d'émergence directement ou indirectement liés à l'expansion des populations humaines (Cohen 2000).

L'intensification des échanges internationaux touristiques ou commerciaux peut favoriser la diffusion rapide et à large échelle de pathogènes ou de vecteurs arthropodes (Wilson 1995; Kilpatrick & Randolph 2012). La propagation rapide du SRAS (Syndrome Respiratoire Aigu Sévère) depuis Hong Kong vers différents pays (exemple : Malaisie, Canada) par le biais de vols internationaux (Riley et al. 2003; Ruan et al. 2003) en est un exemple emblématique, de même que la dispersion de certaines arboviroses tels que la Dengue (Gubler & Clark 1995) ou le Chikungunya ou le Zika (Kwong et al. 2013). La perturbation et la fragmentation des habitats peuvent également favoriser l'émergence et la transmission de maladies infectieuses en facilitant des contacts particuliers entre populations naïves et réservoirs² sauvages de parasites³ infectieux (Sars-Coronavirus et Nypah Virus). Il a également été proposé que la

¹ Tout au long de ce manuscrit les termes relatifs aux "animaux" désignent des animaux non humains.

² Le terme "réservoir" se réfère à la définition de Drexler *et al.* (2012) et désigne un taxon animal hébergeant de façon chronique une importante diversité génétique d'un parasite donné au niveau populationnel (avec ou sans manifestation de la maladie) et qui est naturellement infecté au-delà des limites géographiques d'échanges entre les populations.

³ Le terme "parasite" est ici utilisé au sens de la définition de Combes (2001), à savoir un organisme se reproduisant et se développant au dépend de l'hôte au cours d'une interaction durable. Je considérerai ici que les termes "pathogène" ou "parasite pathogène" désignent un parasite pouvant produire des troubles chez son hôte.

perte de diversité (gènes, espèces, écosystèmes) découlant notamment du développement des activités humaines pouvait sensiblement affecter les risques de transmission d'agents infectieux (Keesing et al. 2010) par des effets de dilution ou d'amplification (Schmidt & Ostfeld 2001; Ostfeld & Keesing 2012) mais le nombre encore trop limité d'études a conduit d'autres auteurs à contredire parfois de manière virulente ces hypothèses (LoGiudice et al. 2003; Randolph & Dobson 2012; Lafferty & Wood 2013; Ostfeld 2013; Ostfeld & Keesing 2013; Wood & Lafferty 2013). Enfin, le changement climatique, dont l'origine au moins en partie anthropique est aujourd'hui à peu près admise (à quelques climatosceptiques près), influence également l'émergence de maladies infectieuses. L'augmentation des températures peut favoriser l'expansion de l'aire de distribution de vecteurs arthropodes rendant ainsi possible une transmission autochtone de pathogènes dans des régions jusque là épargnées (Khasnis & Nettleman 2005). Ainsi au cours de ces dernières années, l'aire de distribution du moustique Aedes albopictus s'est étendue vers le nord et des transmissions autochtones de Chikungunya ont été rapportées en Italie (Angelini et al. 2007a, 2007b) et Espagne et en France (Gould et al. 2010 ; Grandadam et al. 2011). Le réchauffement climatique peut également favoriser le maintien des pathogènes dans l'environnement et/ou augmenter l'abondance de réservoirs vertébrés. Par exemple, le nombre de cas de leptospirose humaine aux Pays-Bas en 2014 a été multiplié par près de 5 par rapport aux années précédentes. Les seules variables corrélées étaient la température moyenne et, surtout, la température minimale durant l'hiver antérieur, significativement plus élevée que la normale, ce qui aurait pu permettre une meilleure survie des populations de rongeurs réservoirs (disponibilité en ressources alimentaires) et/ou des leptospires dans l'environnement (Marga Goris, IXème conférence de l'International Leptospirosis Society, 7-10 octobre 2015, Semarang, Indonésie). Gageons que les multiples appels à projets listant le réchauffement climatique dans leurs mots clefs permettront de multiplier les études et donc de compléter nos connaissances dans ce domaine.

En 2050 on estime que la taille de la population humaine sera de plus de 9,7 milliards contre 7,4 en 2015 (World Population Prospects the 2015 revision, UN), et une augmentation de température estimée au maximum à 4,8°C d'ici 2100 (GIEC). Dans ce contexte, il est raisonnable de penser que l'incidence de certaines maladies émergentes va augmenter. Les derniers épisodes d'émergence (le Syndrome Respiratoire du Moyen-Orient (MERS), SRAS, Chikungunya) ont conduit à des réponses inadaptées illustrées parfois par des peurs paniques des populations touchées et par de mauvaises mesures de gestion publique. Par exemple, le

gouvernement chinois a passé sous silence le premier cas de SRAS localisé dans la province Guangdong et a restreint l'accès aux malades (Kleinman & Watson 2006) ce qui a sans doute favoriser l'extension géographique de l'épidémie par la suite (Enserink 2003). Ces émergences ont des conséquences économiques et sanitaires parfois catastrophiques. Dans le cas du SRAS, les personnels des hôpitaux ont été contaminés par méconnaissance du cycle de transmission et par la mise en place de protections individuelles inadaptées (SRAS, WHO). S'agissant d'un champ de recherche encore relativement vierge, l'investigation de l'écologie et de l'évolution des parasites à potentiel d'émergence est d'un intérêt académique évident. Au delà, une meilleure compréhension de la biologie des parasites infectieux devrait permettre de prévenir, au moins dans une certaine mesure, ces épisodes dans l'avenir, et *a minima* de fournir des informations robustes qui permettront une meilleure préparation des autorités de santé et des populations concernées aux futurs épisodes d'émergence.

2. Les zoonoses et leur contrôle

Les zoonoses sont des pathologies dont les agents étiologiques sont partagés par les populations humaines et animales. Elles constituent plus de 60% des maladies infectieuses émergentes (Jones et al. 2008) et sont intimement liées à l'Histoire de l'Homme. La rage, la peste ou encore la rougeole, sont considérées comme des maladies "anciennes" (Vittecoq et al. 2015) contrairement au syndrome d'immunodéficience acquise (SIDA), au SRAS ou encore aux pathologies hémorragiques à virus Ebola qui n'ont été documentées que durant les dernières décennies. L'étude des zoonoses a permis de mettre à jour des éléments importants dans la compréhension des cycles de ces parasites mais aussi dans la gestion des épidémies. Ainsi, certains pathogènes sont considérés "d'origine animale" même lorsqu'ils se sont adaptés et se maintiennent au sein des populations humaines, tels que les virus de la rougeole et du Sida (le VIH : Virus de l'Immunodéficience Humaine). A l'opposé il est des pathogènes zoonotiques dont les animaux demeurent les sources majeures si ce n'est exclusives, tels que le virus de la rage (Lyssavirus) (Vittecoq et al. 2015) qui trouve chez l'homme un hôte accidentel sans que celui-ci n'ait d'impact significatif sur la maintenance du virus en période inter épidémique. Cette classification, tout comme la classification du vivant en espèces, est bien entendu schématique et il existe vraisemblablement un continuum de situations intermédiaires (Wolfe et al. 2007) (Figure 1). Dans la suite du manuscrit, nous traiterons principalement des zoonoses dont les animaux constituent les réservoirs jouant un rôle majeur dans le maintien et l'évolution des pathogènes en situation inter épidémique, et plus généralement sur de longues échelles de temps.

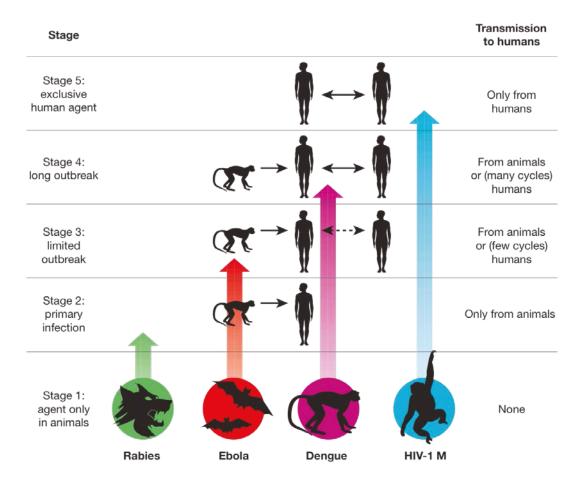


Figure 1. Illustration de cinq étapes à travers lesquelles un pathogène d'origine animale va évoluer et se retrouver dans un cycle strictement confiné à l'Homme (d'après Wolfe et al. 2007).

Il est incontournable, pour une meilleure gestion des maladies zoonotiques, de déterminer le mode de transmission des pathogènes. Trois grandes catégories sont actuellement décrites (Woolhouse *et al.* 2001): les zoonoses (i) à transmission directe (exemple : transmission du virus de la rage par morsure d'un animal infecté), (ii) à transmission indirecte (exemple : transmission de la leptospirose à l'homme par contact avec un environnement contaminé) et enfin (iii) à transmission vectorielle qui impliquent un protagoniste additionnel, arthropode notamment, assurant le lien entre le réservoir et l'hôte secondaire ou accidentel (exemple : transmission des virus du Chikungunya et de la Dengue par piqûres de moustiques du genre Aedes). Dans le cas de maladies non vectorielles, il est a priori possible de limiter les contacts directs et indirects en contrôlant l'abondance des populations réservoirs, en limitant les contacts entre l'homme et ces mêmes populations, ou encore en limitant les contacts entre l'homme et les environnements contaminés (à la suite d'épisodes de pluie dans le cas de la

leptospirose, par exemple). Un contrôle des populations naturelles de vecteurs (par les Techniques de l'Insecte Stérile/Incompatible) ou de leur compétence vectorielle⁴ (utilisation d'endosymbiotes) pourront limiter la transmission d'arboparasites⁵.

D'autres éléments sont à prendre en considération pour la gestion des zoonoses tels que les prévalences d'infections ou encore les variations spatiales ou temporelles du système réservoir/parasite. Récemment, l'investigation d'une maternité de chauves-souris insectivore de La Réunion a montré que la dynamique d'infection de deux pathogènes, *Leptospira* (bactérie) et *Paramyxovirus* (virus), était étroitement associée à la dynamique de la population hôte (Dietrich *et al.* 2015). Plus généralement, aucun contrôle durable de transmission de pathogène zoonotique ne peut être réalisé sans une compréhension du maintien et de la transmission de ces parasites au niveau du pathosystème⁶ réservoir/parasite/hôte secondaire, et sans l'identification de conditions qui favorisent la co-occurrence de populations humaines, de réservoirs infectés et de conditions environnementales favorisant la transmission des parasites à l'homme.

L'exploration de tels systèmes est rendue plus complexe encore s'agissant de pathogènes "multi-hôtes", à savoir de pathogènes (ou de variants génétiques) pouvant infecter et se maintenir dans plusieurs hôtes (Woolhouse & Gowtage-Sequeria 2005). Il s'agit alors d'évaluer la diversité génétique du pathogène et des hôtes réservoirs et de définir leurs implications respectives dans l'épidémiologie de la maladie.

L'exploration d'espèces animales réservoirs doit inclure les espèces commensales de l'Homme telles que des espèces domestiques, péri-domestiques sans oublier les espèces appartenant à la faune sauvage qui constituent une source importante de parasites pathogènes pour l'Homme (Daszak *et al.* 2000 ; Jones *et al.* 2008) et sont à l'origine de 70% des zoonoses (Jones *et al.* 2008). Ces investigations ne doivent pas se limiter aux seules espèces commensales ou connues pour véhiculer des pathogènes tels que les rongeurs (Luis *et al.* 2013 ; Wilkinson *et al.* 2014) mais doivent permettre de décrire la diversité et la distribution des parasites à potentiel zoonotique à différentes échelles de temps et d'espace, de

⁴ Définit le potentiel d'un vecteur à être infecté par un parasite, à le répliquer et à le transmettre à un hôte lors d'un deux 2^{ème} repas de sang.

⁵ Fait référence à des parasites transmis par des arthropodes (arthropod-borne parasites)

⁶ Un pathosystème est un ensemble fonctionnel et actif qui comprend les compartiments pathogène et hôte dans un environnement donné.

comprendre leur écologie et leur évolution et, plus largement, de rassembler toute information pertinente permettant d'évaluer leur potentiel d'émergence.

La compréhension de ces pathosystèmes complexes requiert la mise en place de programmes de recherche multidisciplinaires couvrant un large champ de spécialités dont la systématique, l'écologie et l'évolution des mammifères, de leurs parasites et (éventuellement) de leurs vecteurs (Vinetz et al. 2005; Morse et al. 2012; Wood et al. 2012; Hayman et al. 2013). C'est dans ce contexte que nos travaux ont été conduits afin d'éclairer l'épidémiologie régionale de la leptospirose: une zoonose ré-émergente dont les bactéries pathogènes (genre Leptospira) sont diversifiées et présentent un large spectre d'hôtes.

3. La leptospirose et les leptospires

3.1. La leptospirose : une maladie ré-émergente et négligée

La leptospirose, causée par des bactéries pathogènes du genre *Leptospira* (Leptospiraceae), est une zoonose ré-émergente qui pose des problèmes de santé humaine et animale. La leptospirose est considérée comme la zoonose la plus répandue au monde (Faine et al. 1999 ; Levett 2001 ; Adler & de la Peña Moctezuma 2010). En 1999, le LERG (Leptospirosis Burden Epidemiology Reference Group, WHO) estimait que chaque année 500 000 humains contractaient la maladie et que 10% en mourraient. Récemment, en se basant sur les incidences de la maladie issues d'études dans différents pays, des auteurs estiment que cette maladie touche chaque année plus de 1 million de personnes et cause près de 60 000 décès (Costa et al. 2015). Bien que considérables, ces chiffres sont certainement sous estimés car la leptospirose est une maladie dont la présentation clinique est "non spécifique" c'est à dire caractérisée par des symptômes qui peuvent être associés à d'autres pathologies telle que la malaria ou la dengue (Halliday et al. 2015). L'incidence humaine est nettement supérieure dans les régions tropicales (Costa et al. 2015) et plus élevée encore dans les îles tropicales (Pappas et al. 2008). Cette situation est due à différents facteurs environnementaux et socioéconomiques tels que des climats chauds et humides qui vont favoriser une meilleure survie des bactéries dans l'environnement (Levett 2001) ou des mauvaises conditions sanitaires subies par les populations humaines des pays en voie de développement qui contribuent au développement de la maladie. L'absence de diagnostic "au lit du patient" rapide, sensible et spécifique limite une prise en charge et une antibiothérapie précoces. Elle limite également la compréhension de l'épidémiologie de la maladie et la mise en place de moyens de prévention tels que la sensibilisation des populations. L'absence de syndromes spécifiques, de diagnostic

rapide et peu coûteux ainsi que la fragilité des populations déshéritées contribuent à faire de cette maladie la zoonose la plus répandue dans le monde. Si la leptospirose, pour des raisons discutables, n'est pas listée parmi les maladies tropicales négligées, elle peut en revanche être légitimement qualifiée de *maladie tropicale des populations négligées* (M. Reies, communication personnelle).

3.2. Les leptospires

3.2.1. Systématique et biologie

Le genre *Leptospira* appartient à la famille des Leptospiraceae, de l'ordre des Spirochaetales du grand phylum des Spirochaetes. Les spirochètes sont un groupe de bactéries très ancien (Saier 2000 ; Charon & Goldstein 2002) comprenant, outre les leptospires, d'autres espèces d'importance médicale telles que *Treponema pallidum* (agent de la syphilis) ou encore *Borellia burgdorferi* (responsable de la borréliose de Lyme). La radiation ancienne des spirochètes est associée à des structures cellulaires particulières telles que des chromosomes et plasmides linéaires (*Borellia*) (Casjens 2000). La famille des Leptospiraceae contient trois genres : *Leptospira*, *Leptonema* et *Turneriella* (Levett 2015).

Les leptospires sont des bactéries très mobiles avec une forme allongée, fine et hélicoïdale (Cameron 2015). Le diamètre moyen d'un leptospire est de l'ordre de 0,1 µm avec une longueur variant de 6 à 20 µm. Les extrémités des cellules présentent souvent une forme courbée faisant penser à un crochet (Faine *et al.* 1999 ; Levett 2001) (Figure 3).

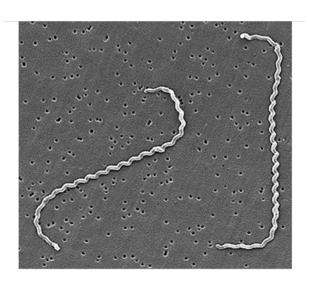


Figure 2. Image de *Leptospira interrogans* souche RGA obtenue par microscopie électronique à balayage (d'après Cameron (2015), image de Rob Weyant du Centre National pour les Maladies Infectieuses (NCID) - Centre de Contrôle et de Prévention des Maladies (CDC)).

Les leptospires possèdent une double membrane. La membrane externe est composée entre autres de Lipopolysaccharides (LPS), éléments impliqués dans la virulence, les réactions immunitaires et qui sont utilisés pour la classification sérologique des leptospires. Comme les bactéries Gram négatif, la rigidité et la structure générale sont assurées par le peptidoglycane qui, dans le cas des leptospires, est accolé à la membrane plasmique. Enfin, deux endoflagelles indépendantes (flagelles périplasmiques) et responsables de la mobilité des leptospires (Levett 2001; Cameron 2015) ont une localisation périplasmique.

Les leptospires sont des bactéries aérobies obligatoires dont la température optimale de croissance se situe entre 28 et 30°C et le pH optimal entre 6,8 et 7,4 (Bharti *et al.* 2003). Ces bactéries peuvent être cultivées à partir du sang ou de tissus dans des milieux liquides, le plus utilisé étant le milieu d'Ellinghausen-McCullough-Johnson-Harris (EMJH) (Ellinghausen & McCullough 1965; Johnson & Harris 1967), enrichi avec différentes vitamines. Des antibiotiques, tels que le 5-fluoro-uracile (5-FU) ou la néomycine, peuvent être ajoutés afin d'éviter les contaminations pouvant limiter le développement des leptospires. La conservation des souches de leptospires peut se faire sur milieu semi-solide tel que le milieu Fletcher qui permet de garder les cultures pendant plusieurs mois à température ambiante. Les souches peuvent être aussi congelées à -80°C ou en azote liquide avec ou sans cryoprotecteur tel que le DMSO (Dimethyl Sulfoxide) (Levett 2001; Cameron *et al.* 2008).

3.2.2. Classification des leptospires

Il existe deux types de classification des leptospires : une classification sérologique basée sur la signature antigénique portée par le LPS et une classification moléculaire qui utilise, au travers d'une batterie de schémas de génotypage, la diversité génétique des bactéries. La classification sérologique distingue les leptospires en au moins 300 sérovars (exemple : canicola, australis, ballum) regroupés en plus de 20 sérogroupes (exemple : Icterohaemorrhagiae, Mini, Pyrogenes) (Picardeau 2013). Cette classification est largement utilisée pour le diagnostic clinique et pour les investigations épidémiologiques. La technique de référence pour ces détections sérologiques est le Test de Micro Agglutination (MAT) (Martin & Pettit 1918) détectant les anticorps (IgG et IgM) de l'hôte qui vont agglutiner des leptospires de références choisis en fonction des sérogroupes prévalents dans un environnement donné.

La classification génétique différencie les leptospires en espèces (genomo-espèces ou espèces génomiques). Le séquençage au *locus rrs2* (ARNr 16S) bactérien permet de

dénombrer aujourd'hui 23 espèces de leptospires génomiques (Parte 2013). Toutefois ce nombre est probablement sous estimé étant donné le rythme élevé de description de nouvelles espèces telles que *Leptospira kmetyi* (Slack *et al.* 2009), *L. idonii* (Saito *et al.* 2013), *L. mayottensis* (Bourhy *et al.* 2014) ou encore la description d'un nouveau clade (Clade C) en Amazonie (Ganoza *et al.* 2006). Sur la base du *locus rrs2*, les espèces de leptospires sont classées en trois groupes : saprophytes, intermédiaires et pathogènes (Cerqueira & Picardeau 2009) (Figure 5). Le groupe des saprophytes comprend notamment *L. meyeri* et *L. biflexa*. Le groupe intermédiaire correspond à des espèces de leptospires dont la pathogénicité est controversée, tels que *L. fainei* et *L. inadai*. Actuellement, le groupe des leptospires pathogènes comprend neuf espèces dont *L. interrogans* et *L. borgpetersenii* (Levett 2015). La pathogénicité du Clade C est inconnue (Ganoza *et al.* 2006).

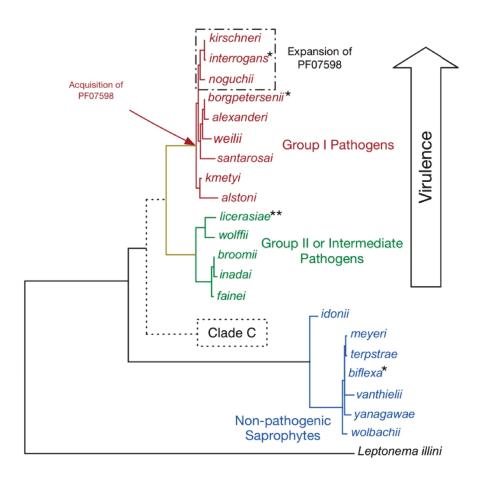


Figure 3. Phylogénie de 21 espèces de leptospires basée sur la séquence complète de l'ARN ribosomique 16S (d'après Lehmann *et al.* 2014). Le Clade C regroupe des leptospires isolés dans des échantillons d'eau au Pérou et dont la pathogénicité est inconnue (Ganoza *et al.* 2006). PF07598 est une famille de gènes dont certains sont impliqués dans la virulence et potentiellement dans la colonisation spécifique des tissues de l'hôte. Pour certaines espèces de leptospires, des génomes complets (*) ou assemblés en contigs (**) sont disponibles sur les bases de données publiques.

Les classifications sérologiques et génomiques ne sont pas congruentes puisqu'une même genomo-espèce peut correspondre à plusieurs sérogroupes et un sérogroupe à plusieurs genomo-espèces (Levett 2001) (Tableau 1). Le plus souvent, cette incongruence ne permet pas de croiser les informations sérologiques et génétiques. De plus, il existe au sein de la communauté scientifique des confusions encore importantes entre les différentes classifications. Ces confusions ne facilitent pas la compréhension globale de l'épidémiologie de la leptospirose.

Tableau 1. Correspondances entre sérogroupes et génomo-espèces de leptospires (*Leptospira***)** (d'après Levett 2001).

Sérogroupes	Génomo-espèces
Andamana	Leptospira biflexa
Australis	L. interrogans, L. noguchii, L. borgpetersenii, L. kirschneri
Autumnalis	L. interrogans, L. noguchii, L. santarosai, L. borgpetersenii, L. kirschneri
Ballum	L. borgpetersenii
Bataviae	L. interrogans, L. noguchii, L. santarosai, L. borgpetersenii, L. kirschneri
Canicola	L. interrogans, L. inadai, L. kirschneri
Celledoni	L. weilii, L. borgpetersenii
Codice	L. wolbachii
Cynopteri	L. santarosai, L. kirschneri
Djasiman	L. interrogans, L. noguchii, L. kirschneri
Grippotyphosa	L. interrogans, L. santarosai, L. kirschneri
Hebdomadis	L. interrogans, L. weilii, L. santarosai, L. borgpetersenii, L. kirschneri, L. alexanderi
Hurstbridge	L. fainei
Icterohaemorrhagiae	L. interrogans, L. weilii, L. inadai, L. kirschneri
Javanica	L. weilii, L. santarosai, L. borgpetersenii, L. meyeri, L. inadai, L. alexanderi
Louisiana	L. interrogans, L. noguchii
Lyme	L. inadai
Manhao	L. weilii, L. inadai, L. alexanderi
Mini	L. interrogans, L. weilii, L. santarosai, L. borgpetersenii, L. meyeri, L. alexanderi
Panama	L. noguchii, L. inadai
Pomona	L. interrogans, L. noguchii, L. santarosai, L. kirschneri
Pyrogenes	L. interrogans, L. noguchii, L. weilii, L. santarosai, L. borgpetersenii
Ranarum	L. interrogans, L. meyeri
Sarmin	L. interrogans, L. weilii, L. santarosai
Sejroe	L. interrogans, L. weilii, L. santarosai, L. borgpetersenii, L. meyeri
Semaranga	L. meyeri, L. biflexa
Shermani	L. noguchii, L. santarosai, L. inadai

Le développement de la biologie moléculaire s'est accompagné de l'application de nombreuses techniques de génotypage des leptospires : AFLP (Amplified Fragment Length Polymorphism), MLVA (Muli Locus Variable number of tandem repeats Analysis), PFGE (Pulsed Field Gel Electrophoresis) ou MLST (Multi Locus Sequences Typing). Si ces méthodes permettent aux laboratoires de diagnostic de détecter et caractériser les leptospires pathogènes dans les échantillons cliniques, les méthodes de typage basées sur les séquences d'ADN ont l'avantage de fournir des caractères moléculaires qui peuvent être déposés dans de bases de données ouvertes (exemple : PubMLST ou GenBank) et permettre d'intégrer des données obtenues mondialement. Le génotypage par MLST, qui consiste à séquencer différents gènes, est aussi utilisé dans les études d'épidémiologie humaine (Thaipadungpanit et al. 2007; Bourhy et al. 2012; Zhang et al. 2015) et de caractérisation de leptospires animales (Dietrich et al. 2014). Les séquences générées permettent entre autre (i) de comparer les leptospires humaines et animales et donc de proposer des réservoirs potentiels, (ii) de déterminer les relations phylogénétiques entre différentes lignées bactériennes et (iii) de proposer des hypothèses quant aux histoires évolutives des leptospires (Dietrich et al. 2014). Ces méthodes de génotypage sont aujourd'hui complétées par le séquençage à haut débit permettant d'accéder aux génomes complets des leptospires.

3.2.3. Les génomes de leptospires

Selon les espèces, le génome des leptospires a un contenu en Guanine + Cytosine (G+C) de 35 à 42 % et une taille variant de 3,9 Mb à 4,6 Mb (Picardeau 2015). Les génomes sont organisés en deux chromosomes circulaires cI (> 3,6 Mb) et cII (278-350 kb) (Zuerner 1991; Picardeau 2015) et d'un réplicon circulaire supplémentaire, p74, chez l'espèce saprophyte L. biflexa (Picardeau et al. 2008). Aujourd'hui des génomes complets sont disponibles pour les espéces L. borgpetersenii, L. interrogans, L. santarosai, L. biflexa et L. licerasiae, et leur comparaison permet de mettre en évidence les gènes impliqués dans la virulence, la pathogénicité, l'écologie ou encore l'évolution des leptospires (Ren et al. 2003; Nascimento et al. 2004; Ricaldi et al. 2012; Lehmann et al. 2013, 2014; Pappas et al. 2015). Par exemple une étude comparative des génomes de l'espèce saprophyte L. biflexa et des espèces pathogènes L. interrogans et L. borgpetersenii a mis en évidence un ensemble de gènes en commun (core genomes) à toutes les espèces analysées et a révélé que près d'un tiers des gènes présents chez L. biflexa est absent chez les espèces pathogènes (Picardeau et al. 2008) (Figure 7).

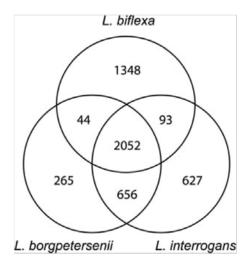


Figure 4. Diagramme de Venn montrant le nombre de gènes uniques et partagés parmi *Leptospira interrogans, L. borgpetersenii* et *L. biflexa* (d'après Picardeau *et al.* 2008).

Une autre étude a mis en évidence un niveau important de réduction génomique chez *L. borgpetersenii* en comparaison avec le génome de *L. interrogans* (Bulach *et al.* 2006). L'absence d'îlots génomiques et notamment de gènes impliqués dans le transport et l'utilisation de métabolites a conduit les auteurs à proposer que le génome réduit de *L. borgpetersenii* ne lui permet pas de survivre dans l'environnement, ce qui favoriserait une transmission directe de type hôtes-hôtes. A l'opposé, *L. interrogans* peut persister plusieurs mois dans l'environnement, facilitant une transmission indirecte aux hôtes accidentels au contact d'un environnement contaminé (Bulach *et al.* 2006).

3.2.4. Cycle de transmission

Le cycle de transmission de la maladie fait intervenir les bactéries, les animaux sauvages ou domestiques et l'environnement (Figure 9). Les bactéries ayant infecté les animaux réservoirs vont coloniser la lumière des tubules rénaux, s'y développer sous forme de biofilm et seront excrétées par la suite dans l'environnement via l'urine (Haake & Levett 2015). La contamination des autres animaux peut se faire directement par contact avec l'urine et/ou avec les tissus contaminés, ou indirectement via l'environnement contaminé (sols, eaux) où certaines espèces de leptospires peuvent se maintenir durant des périodes prolongées. L'homme est considéré comme un hôte accidentel, bien qu'il puisse excréter les bactéries pendant plusieurs mois voire même une année (Ganoza *et al.* 2010). Les leptospires pénètrent dans l'organisme via les abrasions, les coupures cutanées ou encore les muqueuses (Levett

2001). Chez l'homme, la contamination par des environnements souillés est le mode de transmission le plus commun et plusieurs activités ont été identifiées comme à risque tels que les travaux dans les champs, la chasse ou les activités aquatiques (Haake & Levett 2015).

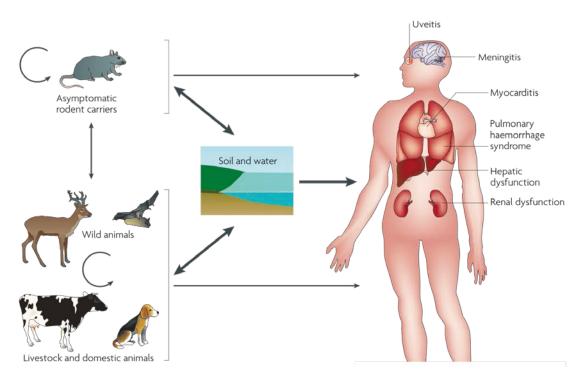


Figure 5. Cycle de transmission des leptospires (d'après Ko et al. 2009).

3.3. La leptospirose humaine

Les mécanismes physiopathologiques ne sont pas encore bien connus mais de part la variation des manifestations cliniques, il est possible que différents facteurs contribuent au tableau symptomatologique de la maladie (Bharti *et al.* 2003). Classiquement, on considère que la maladie résulte des effets directs de la bactérie et de la réponse immune de l'hôte (Bharti *et al.* 2003). Une fois la barrière cutanée passée, les leptospires vont établir une infection systémique par diffusion dans le sang (Faine *et al.* 1999). La période d'incubation varie de 2 à 30 jours (Faine *et al.* 1999). Par la suite, les leptospires vont atteindre différents organes (reins, poumons, foie) mais les reins sont les cibles principales. Au niveau des organes, la leptospirose est caractérisée par des lésions endothéliales, des vascularités et des infiltrats inflammatoires au niveau du foie, du cœur, des poumons, et des reins.

3.3.1. Les différentes formes de la maladie

La leptospirose est une maladie biphasique caractérisée par une phase aigüe (leptospirémique) qui dure en moyenne une semaine puis une phase immune (leptospirurique) avec production d'anticorps et présence de leptospires dans l'urine (Levett 2001) (Figure 11). C'est lors de la phase immune que surviennent les complications de la maladie.

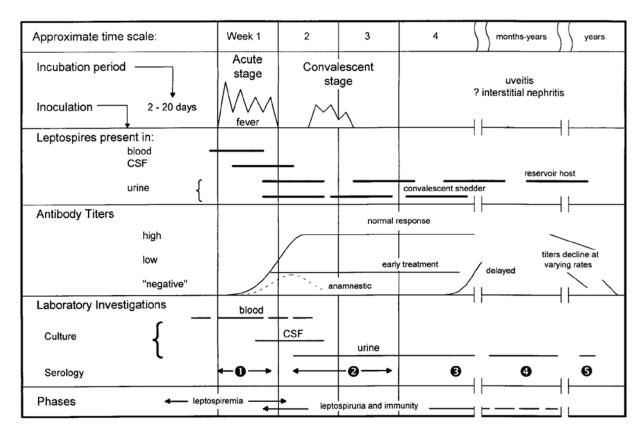


Figure 6. La nature biphasique de la leptospirose et les tests de laboratoires possibles (sérologie et culture) en fonction de l'avancée de la maladie (d'après Levett 2001). Leptopsiremia : leptospirémique (phase aigüe) et leptospiruria : leptospirurique (phase immune).

La leptospirose anictérique constitue la majorité des infections et se caractérise principalement par une fièvre brutale, des céphalées et des myalgies. Mais d'autres symptômes peuvent être associés tels que douleurs abdominales, suffusions conjonctivales, ou encore vomissements (Levett 2001). La leptospirose ictérique est une forme plus grave de la maladie temoignant d'une atteinte hépatique sévère. Le plus souvent, on observe des associations variables de différentes manifestations telles que des ictères, des insuffisances rénales, des atteintes respiratoires, cardiaques, neurologiques et des hémorragies (Levett 2001).

Le syndrome de Weil (ou la maladie de Weil) est la présentation classique de la maladie. Elle se caractérise par la survenue séquentielle d'une phase septicemique, d'une phase ictérique et d'une insuffisance rénale. Le taux de mortalité peut être important de 5 à 15 % (Bharti *et al.* 2003).

Le syndrome d'hémorragie pulmonaire sévère (Severe Pulmonary Hemorrhagic Syndrome : SPHS ou Leptospirosis-associated Pulmonary Haemorrhage Syndrome : LPHS) est une forme fulminante de la maladie. Elle est caractérisée par des hémorragies pulmonaires massives associées à une détresse respiratoire aiguë. Le mécanisme de cette complication gravissime serait une atteinte de l'endothelium vasculaire et serait au moins en partie le temoin d'un processus auto-immun. Les taux de mortalité sont très élevés : plus de 50 % (McBride *et al.* 2005).

Pour des raisons inconnues, la leptospirose est essentiellement une maladie de l'adulte touchant particulièrement les individus masculins, peut-être en raison d'une exposition plus grande.

Finalement il convient de rappeler que les formes symptomatiques de la maladie, ne sont que le sommet de l'iceberg et ne représentent qu'une part très minoritaire de l'ensemble des infections par les leptospires. En effet dans la plupart des cas, l'infection peut être totalement asymptomatique ou donner lieu a un état fébrile bénin guerissant spontanément et échappant ainsi totalement à la détection. En zone d'endémie, la proportion de ces formes peut-être évaluée par la conduite d'enquetes serologiques systématiques.

3.3.2. Le diagnostic biologique

En fonction de l'évolution de la maladie (Figure 11), différentes techniques peuvent être utilisées pour détecter soit directement les bactéries soit les anticorps qui sont les témoins des infections. Ces techniques peuvent être regroupées en trois catégories : (i) l'isolement par culture, (ii) la sérologie et (iii) la biologie moléculaire (Bharti *et al.* 2003 ; Picardeau 2013 ; Haake & Levett 2015).

La culture bactérienne: Lors des deux premières semaines de la maladie, la bactérie peut être isolée par culture à partir du sang. L'urine peut être utilisée comme inoculum pour une mise en culture à partir de la troisième semaine. La culture bactérienne requiert des milieux spéciaux de qualité certifiée et beaucoup de temps car elles doivent être suivies par des lectures sous microscope à fond noir toute les semaines pendant au moins quatre mois.

La sérologie: Les techniques sérologiques sont les plus utilisées par les laboratoires d'analyses. Le MAT est la méthode sérologique de référence de part sa bonne spécificité et sensibilité. Toutefois cette technique requiert un personnel formé à la lecture des résultats. De plus, elle nécessite l'entretien d'une batterie de cultures de leptospires de serovars et serogroupes determinés représentatifs de la région géographique concernée. D'autre tests sérologiques sont utilisés dont l'ELISA (Enzyme-Linked Immunosorbent Assay) IgM.

La biologie moléculaire: Plusieurs systèmes de PCR (Polymerase Chain Reaction) ou de PCR en temps réel (RT-PCR: Real Time-Polymerase Chain Reaction) sont disponibles pour la détection des leptospires. Dans ces systèmes, différents gènes peuvent être utilisés: rrs2, lipL32, secY, lfb1 ... (Mérien et al. 1992; Smythe et al. 2002; Ahmed et al. 2009; Thaipadunpanit et al. 2011).

3.3.3. Traitements

Le traitement varie en fonction de la sévérité et de la durée des symptômes lors du diagnostic du patient. Il fait appel à des antibiotiques tels que la doxycycline ou encore l'ampicilline. Les patients avec une forme sévère doivent être hospitalisés, et pour les plus gravement atteints, ils doivent être admis en soins intensifs (Levett 2001).

3.4. La leptospirose animale

Pratiquement toutes les espèces animales sont susceptibles d'etre infectées par des leptopsires cependant ce sont principalement les petits mammifères tels que les rongeurs (exemple : *Rattus norvegicus*) qui sont considérés comme les principaux réservoirs à l'origine des infections humaines (Plank & Dean 2000 ; Haake & Levett 2015). La liste des espèces est très longue et nous ne traiterons ici que de quelques groupes d'animaux d'élevages, domestiques et issus de la faune sauvage.

La leptospirose représente un réel problème de santé chez les animaux d'élevage (bovins, moutons, cochons) impactant grandement la reproduction et entrainant ainsi des pertes économiques importantes. La sévérité de la maladie va varier en fonction des sérovars et des espèces animales (Plank & Dean 2000 ; Haake & Levett 2015). Classiquement les leptospires se retrouvent dans les reins et sont excrétés par l'urine mais ils peuvent se localiser aussi dans l'utérus. Bien que les mécanismes de la pathogènese ne soient pas encore compris cela va entrainer des avortements et des maladies néonatales (Ellis 2015).

La proximité des chiens et de l'homme et leur rôle potentiellement intermédiaire entre les rongeurs et l'Homme a stimulé de nombreuses études qui ont montré que la maladie chez le chien est similaire à celle de l'Homme, et présente des formes anictériques et ictériques. En revanche, les chats sont considérés comme résistants à la maladie (Ellis 2015).

Un nombre considérable d'études rapporte des infections de leptospires chez les rongeurs. Toutefois peu d'informations concernant les signes cliniques de la maladie chez ces animaux sont disponibles (Ellis 2015). De plus en plus d'études montrent que des espèces de chauves-souris (Chiroptères) de différentes régions du monde hébergent des leptospires (notamment pathogènes) (Cox *et al.* 2005 ; Matthias *et al.* 2005 ; Dietrich *et al.* 2014 ; Ogawa *et al.* 2015). L'implication des chauves-souris dans les récents épisodes d'émergence virale soulève des questions quant aux rôles possibles de ces mammifères dans le maintien et la transmission de leptospires à la faune environnante mais aussi à l'Homme (Tulsiani *et al.* 2011 ; Dietrich *et al.* sous presse).

Les leptospires infectent aussi les espèces de mammifères aquatiques. Par exemple, dans les populations de lions de mer (*Zalophus californianus*), les infections entrainent échouages et mortalité (Cameron *et al.* 2008).

3.5. Associations hôtes-leptospires

Au niveau sérologique, on observe des associations entre sérorvars/sérogroupes et certains taxons animaux (Bharti *et al.* 2003) (Tableau 3). Généralement les rats, les souris, les bovins et les chiens sont associés respectivement aux sérogroupes Icterohaemorragiae, Ballum, Hardjo et Canicola, (Ellis 2015). Toutefois ces associations ne sont pas absolues (Levett 2001; Adler & de la Peña Moctezuma 2010) et on observe des différences de sérogroupes pour une même espèce animale présente dans différentes régions géographiques (Bharti *et al.* 2003; Hamond *et al.* 2014). Par exemple, la Mangouste de Java (*Herpestes auropunctatus*) exprime des anticorps dirigés contre différents sérogroupes en fonction des régions (Bharti *et al.* 2003). Toutefois il faut rester prudent quant aux interprétations sérologiques car ces différences dans les sérogroupes détectés en fonction des régions pourraient être le résultat d'expositions à des leptospires différents. Globalement, les MATs devraient être considérés comme des marqueurs d'exposition mais ils sont souvent considérés comme des marqueurs d'infection. Au niveau moléculaire, les études montrent également certaines associations entre les leptospires et leurs hôtes. Par exemple, les espèces de *Rattus* sont généralement infectées par *L. interrogans* et *L. borgpetersenii* et les espèces de *Mus* sont majoritairement infectées

par *L. borgpetersenii* bien que d'autres espèces de leptospires soient également détectées chez les souris (Matthias *et al.* 2008 ; Cosson *et al.* 201;, Guernier *et al.* en préparation).

Tableau 2. Exemples d'animaux réservoirs de certains serovars de leptospires (d'après Bharti *et al.* 2003).

Hôte réservoir	Serovar(s)
Cochons	pomona, tarassovi
Veaux	hardjo, pomona
Chevaux	brastislava
Chiens	canicola
Moutons	hardjo
Ratons laveurs	grippotyphosa
Rats	icterohaemorrahagiae, copenhageni
Souris	ballum, arborea, bim
Marsupiaux	grippotyphosa
Chauves-souris	cynopteri, wolffi

Les données sur les associations hôtes-leptospires sont importantes dans l'épidémiologie de la maladie puisqu'elles permettent de définir l'origine des infections et les chemins de transmission dans une région donnée, comme cela a pu être exploré à Mayotte (Desvars et al. 2012), à La Réunion (Guernier et al. en préparation) ou en Thaïlande (Cosson et al. 2014). La connaissance de la distribution des leptospires au sein de la faune est un élément de connaissance fondamental dans la caractérisation d'une épidémiologie (Levett 2001 ; Picardeau 2013). Bien qu'implicitement utilisées, peu de recherches se sont consacrées aux associations entre les leptospires et leurs hôtes et moins encore se sont directement intéressées aux patrons de spécificités d'hôtes. Parmi les quelques études publiées, citons les travaux de Wong et al. (2012) montrant une forte spécificité d'espèces hôtes pour des sérogroupes particuliers sur des îles hawaïennes. L'étude de Cameron et al. (2008) montre que les populations de lions de mer (Eumetopias jubatus et Zalophus californianus) et d'éléphants de mer (Mirounga angustirostris) de la côte Ouest des Etats Unis sont infectées respectivement par L. interrogans et L. kirschneri. En réalisant du génotypage MLST, Muriel Dietrich et ses collaborateurs montrent que les petits mammifères endémiques de Madagascar (incluant certaines espèces de chauves-souris) hébergent des lignées de leptospires spécifiques (Dietrich et al. 2014). Les auteurs proposent que la radiation des leptospires est liée à celle des hôtes mammifères endémiques.

3.6. Etude de la leptospirose dans les îles

Comme évoquée précédemment, la leptospirose est une des zoonoses ré-émergentes la plus largement répandue au niveau mondial (Faine et al. 1999 ; Levett 2001 ; Adler & de la Peña Moctezuma 2010). Des travaux antérieurs soulignent que la leptospirose est un bon modèle pour la compréhension d'émergence des maladies infectieuses mais que de nombreuses connaissances sont encore à apporter (Vinetz et al. 2005). Pour combler ces lacunes, les auteurs proposent une approche multidisciplinaire incluant des approches biomédicales, socio-culturelles et écologiques. La taxinomie, l'écologie et l'évolution des pathogènes (i.e. évolution du pathogène et des réservoirs mammifères) ainsi que l'écologie des interactions hôtes-pathogènes (exemples: mode de transmission, hôtes-pathogènes fidélité) restent pour l'essentiel à explorer (Vinetz et al. 2005). Les systèmes insulaires peuvent faciliter de telles études car ce sont des écosystemes simples et relativement fermés qui sont considérés comme des laboratoires naturels pour les études d'évolution et d'écologie (Emerson 2002). En raison de leurs surfaces limitées et de l'éloignement avec les continents sources, les îles présentent une faible richesse spécifique (MacArthur & Wilson 1967) qui facilite l'investigation de la plupart voire de toute la diversité mammifère potentiellement impliquée dans un cycle de transmission. Le niveau d'endémisme élevé (Emerson 2002) et la connaissance de l'histoire géologique des îles océaniques permettent de tester des hypothèses quand aux introductions de pathogènes et leurs histoires évolutives. Ainsi les systèmes insulaires constituent de bons modèles pour la compréhension des mécanismes d'émergence des maladies et peuvent être utilisés pour plusieurs modèles arboparasites (Tortosa et al. 2012). Dans le cas de la leptospirose, des études ont été menées dans différentes îles et ont apporté des données importantes sur l'épidémiologie humaine et animale ou encore l'écologie des bactéries. Ainsi les travaux de Derne et al. (2011) soulignent que les niveaux élevés d'incidence de la maladie sur les îles peuvent résulter d'une faible diversité d'espèces (réservoirs) typique des écosystèmes insulaires. Des émergences de sérovars connus ou nouveaux sont aussi décrites sur les îles (Katz et al. 2011; Lau et al. 2012, 2015). A Mayotte (archipel des Comores, Sudouest de l'Océan Indien), des études rapportent une épidémiologie unique de la leptospirose impliquant une nouvelle espèce de leptospire: Leptospira mayottensis (Bourhy et al. 2010, 2012, 2014). A Hawaï, Wong et al. (2012) montrent que la communauté des bactéries est dépendante de facteurs écologiques et des interactions hôtes-pathogènes. Une revue de Desvars et al. (2011) sur la leptospirose des petits mammifères des petites îles tropicales montre qu'un panel de serovars spécifique circule au sein de chaque île et que cela dépend de la diversité des espèces animales et des environnements.

4. La leptospirose dans les îles du Sud-ouest de l'Océan Indien

La région du Sud-ouest de l'Océan Indien (SOOI) est composée de plusieurs îles ayant des origines géologiques et des âges différents (Figure 13).

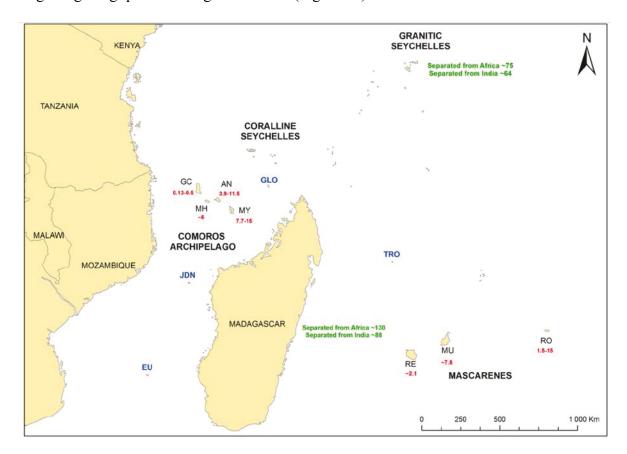


Figure 7. Les îles de la région du Sud-ouest de l'Océan Indien. Les îles granitiques, volcaniques et coralliennes sont indiquées respectivement en vert, en rouge et en bleu. L'archipel des Comores est composé de l'Union des Comores (GC: Grande Comore, AN: Anjouan et MH: Mohéli) et du département français de Mayotte (MY); l'archipel des Mascareignes comprend La Réunion, Maurice et Rodrigues (RE, MU et RO, respectivement); et enfin les îles Eparses incluent Europa, Juan de Nova et Les îles Glorieuses et Tromelin (EU, JDN, GLO et TRO, respectivement). Les âges approximatifs sont indiqués en millions d'années. D'après Tortosa *et al.* (2012) adaptée de Warren *et al.* (2005).

Dans cette région, la leptospirose humaine et animale est un problème de santé publique sur plusieurs îles. La maladie fait l'objet d'une surveillance proactive à La Réunion et à Mayotte alors qu'elle est très peu documentée voire absente sur plusieurs autres îles de la région (Union des Comores, Madagascar et Maurice) (Desvars *et al.* 2013a). Cette situation complique singulièrement l'intégration des données à une échelle régionale. Toutefois, les données accessibles aujourd'hui et dont le rythme de publications s'est accéléré ces dernières années suggèrent une épidémiologie contrastée entre les îles (Bourhy *et al.* 2010, 2012, 2014; Rahelinirina *et al.* 2010; Desvars *et al.* 2011, 2012; Desvars *et al.* 2013a; Pagès *et al.* 2014,

2015a, 2015b; Naze *et al.* 2015; Ratsitorahina *et al.* 2015). Par exemple, les incidences annuelles de la maladie varient en fonction des îles. Ainsi, l'archipel des Seychelles est le pays au monde qui enregistre les plus fortes incidences annuelles de la maladie (Pappas *et al.* 2008). A La Réunion, entre 2008 et 2012 l'incidence moyenne était de 8,2 cas pour 100 000 habitants ce qui est plus faible qu'à Mayotte qui enregistre, en 2010, une incidence de 25 cas pour 100 000 habitants (Bourhy *et al.* 2012; Pagès *et al.* 2014). Une incidence de 2,5 pour 100 000 habitants est reportée pour Maurice et Rodrigues (D'Aoust *et al.* 2010; Pagès *et al.* 2014).

En plus des différences dans les incidences de la maladie, les observations montrent des variations des leptospires (sérogroupes/génotypes) circulants au sein de ces îles. A La Réunion, Icterohaemorrhagiae est le sérogroupe clinique majeur (Pagès et al. 2014) alors que ce sérogroupe n'a jamais été rapporté à Mayotte malgré une surveillance continue par le Centre National de Référence de la Leptospirose (CNR de la Leptospirose). Des études sérologiques menées par Desvars et al. (2013b) sur la faune réunionnaise montrent que l'infection bactérienne se retrouve dans plusieurs espèces de l'île telles que les chiens, les rats, les chats ou encore différents animaux d'élevage. Bien que ces mêmes travaux mettent en évidence la présence de leptospires dans les reins de plusieurs espèces (cochons, musaraignes ou encore chiens), des études moléculaires supplémentaires (séquençage) sont nécessaires afin de comprendre le rôle de ces espèces dans l'épidémiologie de la maladie (Desvars et al. 2013b). Les données génotypiques récentes sur La Réunion montrent que L. interrogans est la principale espèce impliquée dans les cas cliniques (Naze et al. 2015) mais que L. borgpetersenii est également associé à quelques cas sévères (Guernier et al. en préparation). L'investigation moléculaire montre une leptospirose humaine à L. interrogans quasi clonale avec deux haplotypes retrouvés chez l'homme (56 cas sur 58 positifs). Un seul de ces haplotypes est retrouvé chez les rats (R. rattus et R. norvegicus), alors que les chiens hébergent les deux haplotypes. Par ailleurs les souris et les bovins abritent des haplotypes L. borgpetersenii retrouvés chez l'homme (Guernier et al. en préparation). D'autres espèces de leptospires sont détectées dans la faune sauvage telles que L. kirschneri chez Mus musculus (Guernier et al. en préparation) et un leptospire proche de L. borgpetersenii chez Mormopterus françoismoutoui, chauve-souris très abondante et seule espèce mammifère endémique de l'île (Dietrich et al. 2014). Toutefois, aucune de ces bactéries n'a été détectée dans les cas cliniques (Guernier et al., en préparation).

Aux Seychelles une étude en cours indique que la situation est comparable à celle de La Réunion puisque le sérogroupe Icterohaemorrhagiae est largement dominant dans les cas cliniques (Yersin *et al.* 1998) et que *L. interrogans* est l'unique espèce identifiée à ce jour chez les humains (Biscornet *et al.* en préparation). Comme à La Réunion, les haplotypes retrouvés sont peu diversifiés et comprennent un haplotype majoritaire et commun avec les leptospires retrouvés chez les rats (*R. rattus* et *R. norvegicus*) et un second haplotype, minoritaire, dont le réservoir reste à identifier (Biscornet *et al.* en préparation).

A l'île de Maurice, Simon *et al.* (2012) décrivent un cas de leptospirose à *L. interrogans* chez un homme de retour de voyage de l'île.

A Madagascar, la plupart des données humaines sont sérologiques et révèlent de faibles niveaux de séroprévalence en population humaine et la circulation de différents sérogroupes dont le sérogroupe Icterohaemorrhagiae apparait comme prédominant (Lhuillier 1978 ; Ratsitorahina et al. 2015). Au niveau moléculaire chez les humains, les données sont peu nombreuses mais deux cas importés de Madagascar résultent d'infections à *L. kirschneri* et à *L. interrogans* (Bourhy et al. 2012 ; Pagès et al. 2015a). L'investigation de la faune sauvage est plus avancée et indique une situation particulière avec une infection à *L. interrogans* chez les mammifères introduits et des lignées très diversifiées et probablement autochtones ou endémiques chez les mammifères endémiques terrestres (Rahelinirina et al. 2010 ; Dietrich et al. 2014). Dietrich et al. (2014) ont montré que différentes lignées de *L. borgpetersenii* infectent les espèces de chauves-souris insectivores: *Miniopterus* spp. (Miniopteridae) et *Myotis goudoti* (Vespertilionidae).

Mayotte se caractérise par une diversité importante des espèces génomiques de leptospires chez les cas cliniques: *L. borgpetersenii*, *L. interrogans*, *L. kirschneri* et l'espèce nouvellement décrite *L. mayottensis* (anciennement *L. borgpetersenii* groupe B). Cependant aucun cas clinique impliquant le sérogroupe Icterohaemorrhagiae n'a été rapporté (Bourhy *et al.* 2010, 2012, 2014). Au niveau de la faune, Desvars *et al.* (2012) montre que différentes espèces animales sont infectées (chauve-souris frugivore, lémuriens et chiens) mais propose que le rat noir (*R. rattus*) est le réservoir majeur des quatre espèces de leptospires à l'origine des infections humaines.

5. Déterminants de l'épidémiologie de la leptospirose dans le SOOI

Malgré des données incomplètes, difficilement superposables (sérogroupes/génomoespèces) et des systèmes de santé significativement contrastés, il semble que l'épidémiologie de la leptospirose humaine soit assez différente entre les îles en termes d'incidence, de sérogroupes et d'espèces génomiques. Au sein d'un environnement la biodiversité des leptospires est affectée par le climat, la géographie, les interactions biotiques et les activités humaines (Bharti *et al.* 2003). Ainsi, nous proposons trois hypothèses permettant d'expliquer ces particularités (Figure 15)

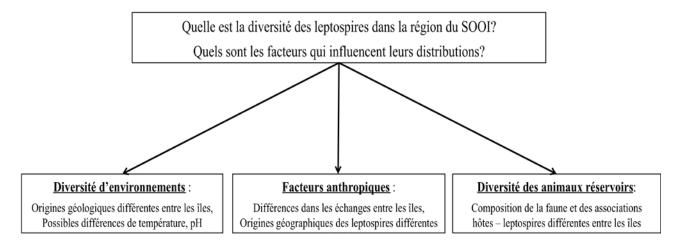


Figure 8. Facteurs pouvant expliquer l'épidémiologie contrastée de la leptospirose dans le Sud-ouest de l'Océan Indien.

Diversité des environnements: Différentes variables environnementales telles que la température, le pH, la disponibilité en nutriments ou encore la présence d'autres organismes peuvent affecter la survie des leptospires dans un environnement donné (Chang et al. 1948; Okazaki & Ringen 1957; Levett 2001; Trueba et al. 2004; Kumar et al. 2015). Le SOOI englobe des îles d'origines géologiques différentes (Figure 13) comprenant des îles granitiques résultant de la dérive des continents (Madagascar, Seychelles) et des îles océaniques d'origine volcanique ayant émergé de novo (Archipel des Comores, La Réunion, Maurice et Rodrigues). On peut émettre l'hypothèse que cette diversité d'environnements avec des conditions diverses (exemples: pH, ensoleillement, température et pluie) peut favoriser le maintien et la transmission de certaines espèces de leptospires au détriment d'autres.

Différences des échanges entre les îles: Les situations économiques et géopolitiques des îles ont conduit au développement d'échanges commerciaux et des mouvements de

populations humaines et animales différents entre les îles. A titre d'exemple, La Réunion entretient des niveaux d'échange importants avec la France métropolitaine tandis que l'Union des Comores importe des biens et des animaux en provenance d'Afrique de l'Est et de Madagascar. Ces échanges constituent des sources potentielles et continues d'introduction de leptospires qui peuvent ou non s'adapter à leur nouvel environnement. En Grande Comore (Union des Comores), un événement d'introduction a conduit à une épidémie dans le cheptel bovin : un parasite (*Theileria parva*) et son vecteur (*Rhipicephalus appendiculatus*) ont été introduits de Tanzanie en Union des Comores par le biais du marché de bétail (Deken *et al.* 2007 ; Yssouf *et al.* 2011). De tels évènements couplés aux mouvements de bétail entre les îles de l'Archipel des Comores (Roger *et al.* 2014) pourraient expliquer que la situation de la leptospirose à Mayotte soit totalement différente de celles connues des autres îles de la région. Ainsi on peut s'attendre à ce que le profil de la leptospirose à Mayotte soit semblable à celui d'Afrique. En prenant l'exemple du rat noir, Desvars (2012) propose que la diversité des leptospires détectées à Mayotte résulte de la diversité des leptospires de la côte Est africaine et malgaches, d'où viendraient les rats noirs de Mayotte.

Diversité des réservoirs: La présence des leptospires dans une région donnée va dépendre de facteurs abiotiques décrits plus haut mais également de la présence de réservoirs particuliers. Ainsi, il est raisonnable de penser que la diversité des mammifères va influencer l'épidémiologie de la maladie locale. Madagascar abrite une diversité de mammifères extraordinaire et on peut s'attendre à ce que la diversité des leptospires y soit plus importante et renferme des lignées/espèces autochtones/endémiques. Les études récentes ont montré que les espèces introduites telles que Rattus spp. sont infectées par un seul haplotype de L. interrogans alors que les petits mammifères endémiques présentent des lignées très diversifiées de L. kirschneri, L. borgpetersenii et L. mayottensis (Rahelinirina et al. 2010; Dietrich et al. 2014). Bien que peu de données sur la leptospirose humaine à Madagascar soient disponibles, il est vraisemblable que l'épidémiologie de la maladie y est totalement différente notamment de celle de La Réunion et des Seychelles.

6. Objectifs des travaux de thèse

Cette thèse a été initiée au Centre de Recherche et de Veille sur les Maladies Emergentes dans l'Océan Indien (CRVOI), dont l'une des thématiques était l'exploration de l'épidémiologie de la leptospirose dans la région Sud-ouest de l'Océan Indien (SOOI), où la maladie représente un problème de santé publique majeur sur plusieurs îles. Ces travaux ont été poursuivis par l'équipe DySIIs (Dynamique des Systèmes Infectieux Insulaires) au sein de l'UMR PIMIT (Processus Infectieux en Milieu Insulaire Tropical). S'agissant d'une zoonose, nous nous sommes intéressés, dans le cadre de cette thèse, aux compartiments humains et animaux de cette pathologie avec pour objectif général d'identifier les déterminants d'une épidémiologie apparemment contrastée entre les îles de la région.

Dans un premier temps, nous avons cherché à compléter le corpus de données régionales en nous intéressant à la leptospirose humaine sur des îles jusque là considérées comme "indemnes" de la maladie : Grande Comore, Mohéli et Anjouan (Union des Comores) (chapitre I). Les objectifs étaient d'évaluer l'exposition éventuelle des populations humaines à la leptospirose et de décrire le profil sérologique de la maladie. Il paraissait vraisemblable que la sérologie de la maladie en Union des Comores soit comparable à celle de l'île voisine de Mayotte, qui appartient au même archipel d'un point de vue géographique et dont l'histoire est étroitement liée à celle de l'Union des Comores.

Nous nous sommes ensuite attachés à investiguer les leptospires pathogènes hébergés par la faune sauvage de la région. Nous avons notamment cherché à montrer que la diversité remarquable d'espèces animales, typique de ce point chaud de biodiversité, était associée à une diversité remarquable de leptospires pathogènes (Grande Comore, Madagascar et Mayotte). Ces données sont présentées dans les **chapitre II, III** et **IV**.

Au delà de ces aspects descriptifs, nous avons investigué un domaine encore peu documenté à savoir l'évolution des leptospires au sein de leurs espèces hôtes (**chapitre III**). Pour cela, nous avons utilisé le modèle biologique des chiroptères (chauves-souris) malgaches constitué d'une importante diversité d'espèces essentiellement endémiques et aux écologies et distributions géographiques variées.

Enfin, nous avons intégré l'ensemble des résultats obtenus dans le cadre de cette thèse et les travaux réalisés par l'ensemble de notre équipe ces dernières années pour décrypter le cas particulier de la leptospirose à Mayotte et plus généralement sur l'archipel comorien. Plusieurs études ont mis en évidence la présence d'une grande diversité d'espèces de

leptospires pathogènes chez l'homme. L'objectif principal des travaux présentés dans ce **quatrième et dernier chapitre**, était de montrer que l'épidémiologie particulière de la leptospirose dans l'archipel des Comores résultait au moins en partie de la présence de leptospires qui ont évolué au cœur d'un hotspot de la diversité animale.

L'ensemble des travaux présentés a fait l'objet de quatre articles originaux (deux articles publiés, un en révision et un soumis) qui sont intégrés au présent manuscrit. Une discussion générale vient compléter ce document et présente les perspectives d'investigations futures.

Chapitre I:

La leptospirose en Union des Comores

1. L'Union des Comores : indemne de leptospirose humaine ?

Située à l'entrée nord du Canal du Mozambique, l'archipel des Comores est constitué de quatre îles d'origine volcanique : les trois îles de l'Union des Comores (Grande Comore, Mohéli, Anjouan) et l'île de Mayotte, département français (Figure 17). Aucun cas de leptospirose n'a été, à notre connaissance, décrit en Union des Comores. De plus, en 2009 des médecins rencontrés à Moroni (capitale d'Union des Comores) lors de la visite d'une délégation du CRVOI n'ont pas eu connaissance de leptospirose humaine dans le pays (Dellagi et Tortosa, communication personnelle). En revanche, la littérature montre que la leptospirose a été diagnostiquée chez deux personnes de retour d'Union des Comores (Socolovschi *et al.* 2011 ; Bourhy *et al.* 2012). Ces cas importés de leptospirose associés à une origine géologique et un peuplement commun aux quatre îles, des échanges humains et animaux (légaux ou illégaux) intenses (Roger *et al.* 2014) et la présence de *Rattus rattus* sur l'ensemble de l'archipel (Louette *et al.* 2004) suggèrent que l'absence de leptospirose en Union des Comores résulte d'un biais de surveillance.

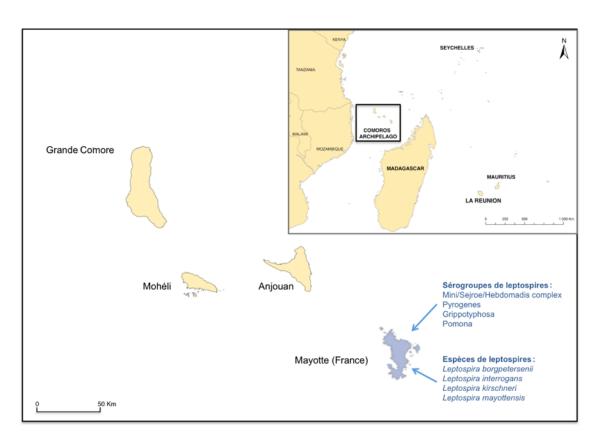


Figure 9. Situation géographique de l'archipel des Comores : Union des Comores (Grande Comore, Mohéli et Anjouan) et Mayotte (France). Les données des sérogroupes de leptospires à Mayotte sont présentés d'après les travaux précédents de Bourhy *et al.* (2010, 2012, 2014).

Une caractérisation de la situation de la maladie en Union des Comores constitue une information importante en terme de santé publique à un niveau national. D'un point de vue académique, la situation au niveau de l'archipel est intéressante puisqu'elle permet une comparaison du profil sérologique de cette zoonose en Union des Comores et à Mayotte où la leptospirose humaine est documentée depuis 1990 (Laporte *et al.* 1990). Ce département français enregistre des incidences plus élevées qu'à La Réunion et présente une épidémiologie singulière avec en particulier l'absence du sérogroupe Icterohaemorrhagiae, qui est pourtant rapporté comme le sérogroupe majoritaire sur la plupart des îles de la région (Laporte *et al.* 1990; Yersin *et al.* 1998; Bourhy *et al.* 2012; Simon *et al.* 2012; Desvars *et al.* 2013a; Pagès *et al.* 2015a; Ratsitorahina *et al.* 2015).

C'est dans ce cadre que nous avons conduit une étude utilisant le Test de Micro Agglutination (MAT) (Martin & Pettit 1918), considéré comme un gold standard dans l'investigation de la leptospirose, sur des sérums humains (excès sera) provenant de différents laboratoires d'analyses et des laboratoires du Programme National de Lutte contre le Paludisme en d'Union des Comores (PNLP). Les résultats de ces travaux ont été publiés dans la revue Emerging Infectious Diseases - CDC en 2014.

2. Article 1

Serologic evidence of Leptospirosis in humans, Union of the Comoros, 2011 Gomard Y, Silai R, Hoarau G, Bon K, Gonneau F, Yssouf A, Michault A, Dellagi K and Tortosa P. (2014). *Emerging Infectious Diseases*, 20, 720–722.

Julie Haendiges, Marvin Rock, Robert A. Myers, Eric W. Brown, Peter Evans, and Narjol Gonzalez-Escalona

Author affiliations: Department of Health and Mental Hygiene, Baltimore, Maryland, USA (J. Haendiges, M. Rock, R.A. Myers); and Food and Drug Administration, College Park, Maryland, USA (E.W. Brown, P. Evans, N. Gonzalez-Escalona)

DOI: http://dx.doi.org/10.3201/eid2004.130818

References

- González-Escalona N, Cachicas V, Acevedo C, Rioseco ML, Vergara JA, Cabello F, et al. Vibrio parahaemolyticus diarrhea, Chile, 1998 and 2004. Emerg Infect Dis. 2005;11:129–31. http://dx.doi. org/10.3201/eid1101.040762
- González-Escalona N, Martinez-Urtaza J, Romero J, Espejo RT, Jaykus LA, DePaola A. Determination of molecular phylogenetics of Vibrio parahaemolyticus strains by multilocus sequence typing. J Bacteriol. 2008;190:2831–40. http:// dx.doi.org/10.1128/JB.01808-07
- Nair GB, Ramamurthy T, Bhattacharya SK, Dutta B, Takeda Y, Sack DA. Global dissemination of *Vibrio parahaemolyticus* serotype O3:K6 and its serovariants. Clin Microbiol Rev. 2007;20:39–48. http:// dx.doi.org/10.1128/CMR.00025-06
- DePaola A, Kaysner CA, Bowers J, Cook DW. Environmental investigations of Vibrio parahaemolyticus in oysters after outbreaks in Washington, Texas, and New York (1997 and 1998). Appl Environ Microbiol. 2000;66:4649–54. http://dx.doi.org/10.1128/AEM.66.11. 4649-4654.2000
- Abbott SL, Powers C, Kaysner CA, Takeda Y, Ishibashi M, Joseph SW, et al. Emergence of a restricted bioserovar of Vibrio parahaemolyticus as the predominant cause of vibrio-associated gastroenteritis on the West Coast of the United States and Mexico. J Clin Microbiol. 1989;27:2891–3.
- Jolley KA, Maiden MC. BIGSdb: scalable analysis of bacterial genome variation at the population level. BMC Bioinformatics. 2010;11:595. http://dx.doi. org/10.1186/1471-2105-11-595
- Jolley KA, Hill DM, Bratcher HB, Harrison OB, Feavers IM, Parkhill J, et al. Resolution of a meningococcal disease outbreak from wholegenome sequence data with rapid Web-based analysis methods. J Clin Microbiol. 2012;50:3046–53. http://dx.doi. org/10.1128/JCM.01312-12

- Jolley KA, Maiden MC. Automated extraction of typing information for bacterial pathogens from whole genome sequence data: Neisseria meningitidis as an exemplar. Euro Surveill. 2013;18:20379.
- Bryant D, Moulton V. Neighbor-net: an agglomerative method for the construction of phylogenetic networks. Mol Biol Evol. 2004;21:255–65. http://dx.doi. org/10.1093/molbev/msh018
- Makino K, Oshima K, Kurokawa K, Yokoyama K, Uda T, Tagomori K, et al. Genome sequence of Vibrio parahaemolyticus: a pathogenic mechanism distinct from that of V. cholerae. Lancet. 2003;361:743–9. http://dx.doi.org/10.1016/ S0140-6736(03)12659-1

Address for correspondence: Narjol Gonzalez-Escalona, Food and Drug Administration, Center for Food and Applied Nutrition, 5100 Paint Branch Pkwy, College Park, MD 20740, USA; email: narjol.gonzalez-escalona@fda.hhs.gov

Serologic Evidence of Leptospirosis in Humans, Union of the Comoros, 2011

To the Editor: Leptospirosis is a worldwide bacterial zoonosis caused by infection with pathogenic Leptospira spp. (Spirochaetales, Leptospiraceae). Most mammals can be infected, but rats are considered the main reservoir, maintaining Leptospira spirochetes in the lumen of renal tubules and contaminating the environment with bacteria-infected urine. Transmission to humans is accidental, occurring through contact with animal secretions or with contaminated environmental materials.

In temperate countries, human leptospirosis is a sporadic disease; incidence is much higher in the tropics because climate and environmental conditions are conducive to the survival of bacteria, resulting in increased exposure of humans to leptospirosiscausing pathogens (1). Among islands in the southwestern Indian Ocean, human leptospirosis is endemic to Mayotte, France, and La Réunion (2–4) and to the Seychelles, where the incidence of leptospirosis is one of the highest worldwide (5). Leptospirosis is poorly documented in other islands in the region, including Mauritius, Madagascar, and the Union of the Comoros (2,6-8). Whether the scant documentation indicates underdiagnosis or reflects local epidemiologic specificities is unknown. To improve knowledge of Leptospira infection in the region, we conducted a study in the Union of the Comoros to serologically assess the presence or absence of leptospirosis in humans. The Union of the Comoros consists of 3 islands: Grande-Comore, Mohéli, and Anjouan. Together with a fourth, southern island, Mayotte, these islands form the Comoros Archipelago.

For feasibility reasons, we used excess serum samples. Seventy-six samples were from healthy volunteers who gave informed consent; 318 clinical blood samples from patients had been obtained by private laboratories and by the surveillance laboratories and by the surveillance laboratory of the National Malaria Control Programme (PNLP) during August 1–October 8, 2011. The Ministère de la Santé, de la Solidarité et de la Promotion du Genre of the Union of the Comoros, authorized the serologic investigation (authorization no. 1175/MSSPG/DNS).

We used the microscopic agglutination test (MAT) to test serum samples; the MAT was based on a panel of 15 *Leptospira* strains, enabling the screening of all recently reported serogroups for human and animal cases on neighboring Mayotte (2,4,9). A list of the tested strains follows, shown as *Genus species* Serogroup/Serovar (type strain): *L. borgpetersenii* Ballum/Castellonis (Castellon 3), *L. borgpetersenii* Sejroe/Hardjobovis (Sponselee), *L. borgpetersenii* Sejroe/Sejroe (M 84),

L. borgpetersenii Tarassovi/Tarassovi (Perepelicin), L. interrogans Australis/Australis (Ballico), L. interrogans Autumnalis/Autumnalis (Akiyami A), L. interrogans Bataviae/Bataviae (Van Tienen), L. interrogans Canicola/Canicola (Hond Utrecht IV), L. interrogans Hebdomadis/Hebdomadis (Hebdomadis), L. interrogans Icterohaemorrhagiae/Copenhageni (Wijnberg), L. interrogans Pyrogenes/Pyrogenes (Salinem), L. kirschneri Cynopteri/Cynopteri (3522C), L. kirschneri Grippotyphosa/Grippotyphosa (Moskva V), L. kirschneri Mini/Undetermined serovar (200803703) (9), L. noguchii Panama/ Panama (CZ214K). Each serum sample was tested at dilutions ranging from 1:50 to 1:3,200 and considered positive when the MAT titer was ≥ 100 .

Our serologic findings showed evidence of *Leptospira* infection in humans on the 3 islands of the Union

of the Comoros (MAT titers 100-1,600, geometric mean titer [GMT] 194). The positivity rate was 10.3% (95% CI 4.8–15.9) for samples from Mohéli, 4.2% (95% CI 1.4-7.0) for samples from Grande-Comore, and 3.4% (95% CI 0.1-6.7) for samples from Anjouan; no significant difference was found between islands or by the age or sex of residents (p>0.05, Fisher exact test). Leptospira infection was more prevalent and MAT titers were higher among serum samples from the patient group than the healthy donor group (20 positive samples/318 total vs. 3 positive samples/76 total; GMT 207 vs. GMT 126), but the difference was not significant (p>0.05, Fisher exact test). In 78% of seropositive serum samples, antibodies reacted with serogroups Australis, Bataviae, Grippotyphosa, Panama, Pomona, Pyrogenes, Mini, and/or Sejroe. MAT titers >100, which are suggestive of more specific antibodies to *Leptospira*, were observed for all serogroups except Australis and Sejroe. Pyrogenes serogroup was identified in one third of positive samples from Mohéli and was associated with the highest agglutination titers (Figure).

Our data indicate that Leptospira infections do occur in humans in the Union of the Comoros; this finding is consistent with those in studies reporting leptospirosis in persons returning from travel in the Union of the Comoros (2,8) and with the detection of pathogenic Leptospira spp. in bats sampled on these islands (10). The human leptospirosis-related serologic findings in Union of Comoros are most comparable to those from neighboring Mayotte, where leptospirosis is mainly caused by serogroups Mini/Sejroe/ Hebdomadis complex, Pyrogenes,

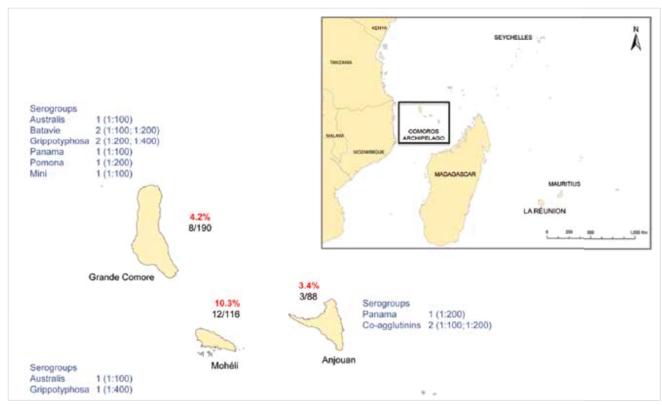


Figure. Microagglutination test results, showing serologic evidence of leptospirosis in humans, Union of the Comoros, 2011. The percentage of positive cases is shown for each island; the number below the percentage indicates the number of positive serum samples/ total number tested. The serogroups identified on each island are shown; numbers represent the number of positive serum samples and, in parentheses, the number of corresponding titers. When agglutination was observed with >1 serogroup, the serogroup with a titer difference ≥2 relative to other serogroups was considered to be the infecting serogroup; when no serogroup had a titer difference ≥2 relative to other serogroups, coagglutinins were considered to be present in the serum sample. Data for Mayotte Island are from previous studies (2,4).

Grippotyphosa, and Pomona and where serogroup Icterohaemorraghiae is not detectable (2). These findings contrast with human leptospirosis findings from La Réunion and the Seychelles, where the Icterohaemorraghiae serogroup is most common (3).

Our MAT-derived data cannot discriminate between recent and past *Leptospira* infections, nor can these data be used to determine the severity of the disease in the Union of the Comoros. Nonetheless, the data strongly support the presence of human leptospirosis on the 3 islands of the Union of the Comoros and emphasize the need for a proper diagnosis to ascertain the number of leptospirosis cases among the acute febrile illnesses in this country.

Acknowledgments

We thank Lisa Cavalerie and Marina Béral for their help with statistical analysis and with preparing the figure.

This work was supported by European Regional Development Funds ERDF-POCT; Réunion, *LeptOI* project.

Yann Gomard, Rahamatou Silai, Géraldine Hoarau, Ketty Bon, Florelle Gonneau, Amina Yssouf, Alain Michault, Koussay Dellagi, and Pablo Tortosa

Author affiliations: Centre de Recherche et de Veille sur les Maladies Emergentes dans l'Océan Indien (CRVOI), Ste. Clotilde, La Réunion, France (Y. Gomard, K. Dellagi, P. Tortosa); Programme National de Lutte contre le Paludisme (PNLP), Moroni, Comoros (R. Silai, A. Yssouf); Centre Hospitalier Universitaire, St. Pierre, La Réunion (G. Hoarau, K. Bon, F. Gonneau, A. Michault); Université de La Réunion, Ste. Clotilde (Y. Gomard, P. Tortosa); Unité de Recherche sur les Maladies Infectieuses et Tropicales Emergentes, Marseille, France (A. Yssouf); and Institut de Recherche pour le Développement, Ste Clotilde (K. Dellagi)

DOI: http://dx.doi.org/10.3201/eid2004.131207

References

- Levett PN. Leptospirosis. Clin Microbiol Rev. 2001;14:296–326. http://dx.doi. org/10.1128/CMR.14.2.296-326.2001
- Bourhy P, Collet L, Lernout T, Zinini F, Hartskeerl RA, van der Linden H, et al. Human *Leptospira* isolates circulating in Mayotte (Indian Ocean) have unique serological and molecular features. J Clin Microbiol. 2012;50:307–11. http://dx.doi. org/10.1128/JCM.05931-11
- Picardeau M. Diagnosis and epidemiology of leptospirosis. Med Mal Infect. 2013;43:1–9. http://dx.doi.org/10.1016/j. medmal.2012.11.005
- Bourhy P, Collet L, Clément S, Huerre M, Ave P, Giry C, et al. Isolation and characterization of new *Leptospira* genotypes from patients in Mayotte (Indian Ocean). PLoS Negl Trop Dis. 2010;4:e724. http:// dx.doi.org/10.1371/journal.pntd.0000724
- Pappas G, Papadimitriou P, Siozopoulou V, Christou L, Akritidis N. The globalization of leptospirosis: worldwide incidence trends. Int J Infect Dis. 2008;12:351–7. http:// dx.doi.org/10.1016/j.ijid.2007.09.011
- Simon F, Morand G, Roche C, Coton T, Kraemer P, Fournier P-E, et al. Leptospirosis in a French traveler returning from Mauritius. J Travel Med. 2012;19:69–71. http://dx.doi.org/10.1111/ j.1708-8305.2011.00573.x
- Rahelinirina S, Léon A, Harstskeerl RA, Sertour N, Ahmed A, Raharimanana C, et al. First isolation and direct evidence for the existence of large small-mammal reservoirs of *Leptospira* sp. in Madagascar. PLoS ONE. 2010;5:e14111. http://dx.doi. org/10.1371/journal.pone.0014111
- Socolovschi C, Angelakis E, Renvoisé A, Fournier P-E, Marié JL, Davoust B, et al. Strikes, flooding, rats, and leptospirosis in Marseille, France. Int J Infect Dis. 2011;15:e710–5. http://dx.doi. org/10.1016/ji.ijid.2011.05.017
- Desvars A, Naze F, Vourc'h G, Cardinale E, Picardeau M, Michault A, et al. Similarities in *Leptospira* serogroup and species distribution in animals and humans in the Indian Ocean island of Mayotte. Am J Trop Med Hyg. 2012;87:134–40. http://dx.doi.org/10.4269/ajtmh.2012. 12-0102
- Lagadec E, Gomard Y, Guernier V, Dietrich M, Pascalis H, Temmam S, et al. Pathogenic *Leptospira* spp. in bats, Madagascar and Union of the Comoros. Emerg Infect Dis. 2012;18:1696–8. http://dx.doi. org/10.3201/eid1810.111898

Address for correspondence: Pablo Tortosa, CRVOI, Plateforme de recherche CYROI, 2 rue Maxime Rivière, 97490 Ste Clotilde, France; email: pablo.tortosa@univ-reunion.fr

Nosocomial Drug-Resistant Bacteremia in 2 Cohorts with Cryptococcal Meningitis, Africa

To the Editor: Cryptococcal meningitis is the second leading cause of AIDS-related deaths in Africa. The prolonged hospitalization necessary for optimal management may predispose severely immunocompromised persons to hospital-acquired infections. Limited data are available for sub-Saharan Africa regarding multidrug-resistant infections (1,2). We hypothesized that bacteremia was a major cause of death.

We reviewed bacteremia episodes in cryptococcal meningitis cohorts in Kampala, Uganda (n = 115 episodes) and Cape Town, South Africa (n = 72) during November 2010–April 2013. Data were obtained from the prospective cryptococcal optimal antiretroviral therapy timing trial (www. clinicaltrials.gov:NCT01075152), a randomized strategy trial assessing optimal antiretroviral therapy timing (n = 142) and another prospective observational cohort in Cape Town (n = 45).

We enrolled HIV-infected adults who had a first episode of cryptococcal meningitis diagnosed by cerebrospinal fluid culture or cryptococcal antigen testing. Standardized treatment was in accordance with World Health Organization (WHO) guidelines: amphotericin deoxycholate, 0.7–1.0 mg/kg/d for 14 days, and fluconazole, 800 mg/d, requiring a minimum 14-day hospitalization (3). Each person provided written informed consent. Institutional review board approval was obtained.

Blood cultures were obtained in accordance with physician discretion, typically with new onset fever (>38°C) unrelated to amphotericin. Two aerobic blood cultures were obtained from 1 peripheral site and not

3. Résultats majeurs

Notre étude met en évidence pour la première fois une exposition des populations humaines des îles d'Union des Comores aux leptospires pathogènes (Grande Comore, Mohéli et Anjouan). L'analyse révèle un profil sérologique comparable à celui de Mayotte avec notamment l'absence du sérogroupe Icterohaemorrhagiae et la présence du sérogroupe Mini, jusque là limité dans la région à la seule île de Mayotte (Figure 19). A l'échelle de la région, ces données confirment et renseignent les différences sérologiques de la maladie entre les îles. Nos résultats associés aux études précédentes indiquent deux situations sérologiques distinctes, un groupe d'îles constitué de La Réunion, de l'île Maurice et des Seychelles présentant une leptospirose à Icterohaemorragie majoritaire et, d'autre part, l'archipel des Comores présentant un profil sérologique plus complexe avec une circulation de nombreux sérogroupes et l'absence notable du sérogroupe Icterohaemorragiae.

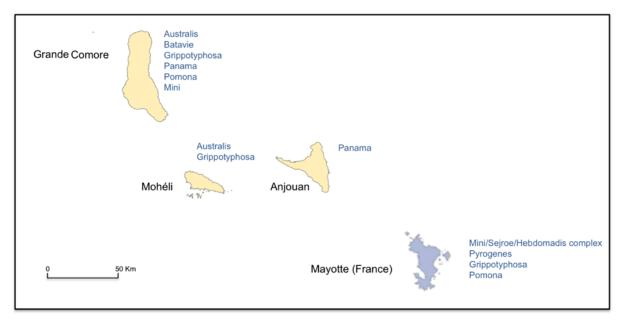


Figure 10. Sérogroupes des leptospires détectés dans les populations humaines des îles de l'archipel des Comores (d'après Bourhy et al. 2012; Gomard et al. 2014).

Chapitre II : Les leptospires et les chiroptères de la région du SOOI

1. Les leptospires des chauves-souris d'Union des Comores et de Madagascar

La compréhension de l'épidémiologie humaine de la leptospirose dans une région donnée requière une bonne connaissance des leptospires présents dans cette région ainsi que des réservoirs animaux qui les excrètent (Levett 2001). Idéalement, il faudrait pouvoir caractériser l'ensemble des leptospires hébergés par les différentes espèces animales de la faune locale mais une connaissance exhaustive est difficile à atteindre pour un pathogène présentant un spectre d'hôte extrêmement large. Le plus souvent, les études se limitent donc à l'investigation d'une fraction de la faune, choisie *a priori* en fonction de l'importance épidémiologique par rapport à la maladie humaine, en particulier en raison de la proximité d'une faune particulière avec les populations humaines, ou en raison de la diversité des pathogènes potentiellement associés à cette faune.

Dans le chapitre précédent nous avons mis en évidence une exposition des populations humaines de l'Union des Comores aux leptospires pathogènes (chapitre I). A notre connaissance, aucune donnée relative à la leptospirose animale n'est disponible sur ces îles. Comme pour la leptospirose humaine, l'absence de données concernant les réservoirs animaux résulte vraisemblablement d'une absence d'investigation. Le rôle joué par les rats noirs (*Rattus rattus*) dans la leptospirose humaine à Mayotte (Desvars *et al.* 2012) appelle une investigation approfondie de cette espèce de mammifère introduite en Union des Comores. Toutefois, nous nous sommes ici intéressés à un ordre de mammifère pour lequel peu d'informations sont encore disponibles aujourd'hui quant à son rôle potentiel de réservoir de leptospires : les chauves-souris (Ordre des Chiroptera). Cet ordre, ancien et reconnu comme réservoir pour de nombreux pathogènes humains (Calisher et al. 2006; Wong et al. 2007; Chomel et al. 2015), pourrait non seulement héberger des leptospires pathogènes mais surtout une diversité importante si l'on s'en tient à la définition de compartiment réservoir proposée par Felix Drexler (Drexler et al. 2012). A Mayotte, les sérogroupes Pyrogenes et Grippotyphosa on été détectés dans la seule espèce de chauve-souris frugivore de l'île: Pteropus seychellensis (Pteropodidae) (Desvars et al. 2012). A Madagascar, les travaux de Kolochine-Erber & Brygoo (1956) et de Lhuillier (1978) sur *Pteropus rufus* n'ont pas mis en évidence d'infection à Leptospira chez cette autre espèce frugivore. Des études montrent la présence de leptospires chez les chauves-souris, notamment en Amérique du Sud (Matthias et al. 2005), en Australie (Cox et al. 2005) ou encore au Danemark (Fennestad & Borg-Petersen 1972). Dans cette partie des travaux, nous avons cherché dans un premier temps à mettre en évidence des leptospires pathogènes dans différentes espèces de chauves-souris (frugivores et insectivores) régionales puis à caractériser la diversité des leptospires détectées.

Nous avons utilisé des approches moléculaires pour détecter (RT-PCR) et identifier (phylogénie moléculaire sur l'ARNr 16S) les leptospires pathogènes dans trois espèces de chauves-souris (deux espèces insectivores et une espèce frugivore) d'Union des Comores. Nous avons également intégré à l'étude neuf espèces insectivores échantillonnées à Madagascar. Les résultats de cette étude ont été publiés dans la revue Emerging Infectious Diseases - CDC en 2012.

2. Article 2

Pathogenic Leptospira spp. in bats, Madagascar and Union of the Comoros

Lagadec E*, Gomard Y*, Guernier V, Dietrich M, Pascalis H, Temmam S, Ramasindrazana B, Goodman S M, Tortosa P and Dellagi K. (2012). *Emerging Infectious Diseases*, 18, 1696–1698.

(*): Co-premiers auteurs

References

- Jones MS, Lukashov VV, Ganac RD, Schnurr DP. Discovery of a novel human picornavirus in a stool sample from a pediatric patient presenting with fever of unknown origin. J Clin Microbiol. 2007;45:2144–50. http://dx.doi.org/10. 1128/JCM.00174-07
- Abed Y, Boivin G. New Saffold cardioviruses in 3 children, Canada. Emerg Infect Dis. 2008;14:834–6. http:// dx.doi.org/10.3201/eid1405.071675
- Drexler JF, Luna LK, Stöcker A, Almeida PS, Ribeiro TC, Petersen N, et al. Circulation of 3 lineages of a novel Saffold cardiovirus in humans. Emerg Infect Dis. 2008;14:1398–405. http:// dx.doi.org/10.3201/eid1409.080570
- Blinkova O, Kapoor A, Victoria J, Jones M, Wolfe N, Naeem A, et al. Cardioviruses are genetically diverse and cause common enteric infections in South Asian children. J Virol. 2009;83:4631–41. http://dx.doi. org/10.1128/JVI.02085-08
- Zoll J, Erkens Hulshof S, Lanke K, Verduyn Lunel F, Melchers WJ, Schoondermarkvan de Ven E, et al. Saffold virus, a human Theiler's-like cardiovirus, is ubiquitous and causes infection early in life. PLoS Pathog. 2009;5:e1000416. http://dx.doi. org/10.1371/journal.ppat.1000416
- Nielsen ACY, Böttiger B, Banner J, Hoffmann T, Nielsen LP. Serious invasive Saffold virus infections in children, 2009. Emerg Infect Dis. 2012;18:7–12. http:// dx.doi.org/10.3201/eid1801.110725
- Edgar RC. MUSCLE: multiple sequence alignment with high accuracy and high throughput. Nucleic Acids Res. 2004;32:1792–7. http://dx.doi.org/10. 1093/nar/gkh340
- Guindon S, Dufayard JF, Lefort V, Anisimova M, Hordijk W, Gascuel O. New algorithms and methods to estimate maximum-likelihood phylogenies: assessing the performance of PhyML 3.0. Syst Biol. 2010;59:307–21. http://dx.doi. org/10.1093/sysbio/syq010
- Posada D. jModelTest: phylogenetic model averaging. Mol Biol Evol. 2008;25:1253– 6. http://dx.doi.org/10.1093/molbev/msn 083
- Delport W, Poon AF, Frost SD, Kosakovsky Pond SL. Datamonkey 2010: a suite of phylogenetic analysis tools for evolutionary biology. Bio-informatics. 2010;26:2455–7. http://dx.doi.org/10.1093/bioinformatics/ btq429

Address for correspondence: Jie Cui, Department of Biology, Millennium Science Complex, Pennsylvania State University, University Park, PA 16802, USA; email: jiecui@yahoo.com

Pathogenic Leptospira spp. in Bats, Madagascar and Union of the Comoros

To the Editor: Leptospirosis is a zoonosis of global distribution; incidence rates are particularly high in tropical areas (1). Leptospirosis is a major public health problem on islands in the southwestern Indian Ocean, particularly La Réunion, Mayotte, and the Seychelles (where incidence rates are among the highest in the world) (1). In contrast, no human case has been reported on the nearby islands of Madagascar and Union of the Comoros. However, the recent demonstration of pathogenic Leptospira spp. in small mammals introduced to Madagascar suggests possible transmission from free-living animals to humans (2).

In addition to the fact that incidence rates vary among humans, clinical bacterial isolates from different islands belong to different serogroups and serovars and show diverse molecular features (3,4). This diversity might be correlated with that of the reservoir hosts; the islands in the southwestern Indian Ocean are a hot spot of biodiversity with extraordinary levels of vertebrate endemism. Most studies investigating wild-animal reservoirs of *Leptospira* spp. on the islands in the southwestern Indian Ocean have focused on small mammals that had been introduced to the islands (2,5), although bats infected with pathogenic Leptospira spp. have been identified in other regions (6). Whether bats are a reservoir of Leptospira spp. on these islands remains unknown. Therefore, we looked for this bacterium in bats from Madagascar and Union of the Comoros and characterized associated genetic diversity.

As part of an ongoing program aimed at identifying viral and

bacterial infectious agents in island wild fauna, 129 insectivorous and frugivorous bats were tested for Leptospira spp. The bats belonged to 12 species: 9 from Madagascar (Mormopterus jugularis, Otomops madagascariensis, Triaenops furculus, T. menamena, Miniopterus Miniopterus gleni, Miniopterus mahafaliensis, Myotis goudoti, Hypsugo anchietae) and from Union of the Comoros (Rousettus obliviosus, Chaerephon pusillus, Miniopterus griveaudi). Bats were captured in mist nets or harp traps at 8 sites in Madagascar and 6 sites in Union of the Comoros. Organs were collected in the field and immediately stored in liquid nitrogen.

Total nucleic acids were extracted from a pool of kidney, spleen, and lung tissue by using the Biorobot EZ1 and EZI Virus Mini Kit version 2.0 (QIAGEN, Les Ulis, France). Reverse transcription was then performed with GoScript reverse transcriptase (Promega, Charbonnières-les-Bains, France) to obtain cDNA. We screened pathogenic Leptospira spp. with a probe-specific real-time PCR (7). The 25 positive samples were subsequently subjected to a PCR procedure that amplified fragments from 682 to 1,293 bp of the 16S rRNA gene (depending on the amplification success) by using published primers (8-10). Resulting PCR products from 7 samples were sequenced and compared available sequences in GenBank by using phylogenetic construction with PhyML 3.0.

Of the 12 bat species tested, 11 were positive for *Leptospira* spp. (the only *H. anchietae* bat tested was negative). Among 52 bats from Madagascar, 18 (34.6%) were infected; detection rates were often high, e.g., 8 (80%) of 10 *T. menamena* bats. In contrast, among 77 bats from Union of the Comoros, only 9 (11.7%) were infected. *Leptospira* spp. seem to be ubiquitous in the study areas; infected bats were found at 7 of 8

sites in Madagascar and 3 of 6 sites in the Union of the Comoros. Of the 7 Leptospira spp. sequences obtained from bats in this study, 3 were closely related to L. borgpetersenii, 1 grouped with L. interrogans, and 3 were not associated with any described species (Figure). L. interrogans and L. borgpetersenii were identified from R. obliviosus bats from the same cave in the Union of the Comoros, and the L. borgpetersenii sequence was closely related to that identified from the O. madagascariensis bats,

which are endemic to Madagascar. Potentially pathogenic Leptospira spp. were found in bats of a wide variety of species in Madagascar and Union of the Comoros, at most study sites, and at levels notably higher than those reported from similar studies in other regions (6). Some of the bats that were *Leptospira* spp.-positive by PCR, particularly the genera Mormopterus and Chaerephon, often occupy synanthropic day roost sites. For example, we sampled 1 positive colony of C. pusillus bats in a school

attic (Pomoni, Anjouan, Union of the Comoros), and bat scats were visible on the floor within the classroom. Bats from Madagascar

Union of the Comoros harbor a notable diversity of Leptospira spp.; this finding is in accordance with the diversity found in a comparable investigation of bats in the Amazon region (6). Although leptospirosis in humans is suspected only on the islands associated with this study (10), incidence among humans in Mayotte, part of the Union of the Comoros archipelago, has been shown to be high and mainly associated with L.

borgpetersenii (3). The use of more polymorphic markers combined with the sequencing of clinical isolates should provide better characterization of Leptospira spp. diversity and the potential role of bats in human leptospirosis.

Permits for this research were kindly issued by Direction du Système des Aires Protégées, Direction Générale de l'Environnement et des Forêts (Madagascar), and the Centre National de Documentation et de Recherche Scientifique (Union of the Comoros). This work was supported by Fonds Européen de Développement Régional Programme Opérationnel de Coopération Territoriale Réunion, Pathogènes Associés à la Faune Sauvage Océan Indien #31189, M.D. is supported by the European Community FP7 Capacity RegPot Run-Emerge Program.

Erwan Lagadec,1 Yann Gomard,1 Vanina Guernier, Muriel Dietrich, Hervé Pascalis, Sarah Temmam, Beza Ramasindrazana, Steven M. Goodman, Pablo Tortosa, and Koussay Dellagi

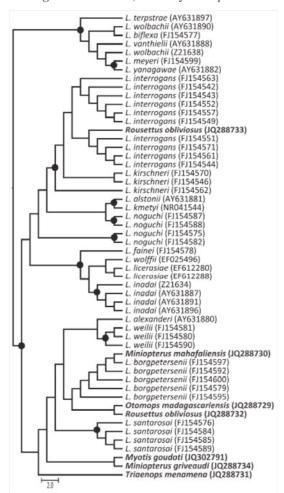


Figure. Maximum-likelihood phylogenetic tree of Leptospira spp.16s rDNA in bats from Madagascar and the Union of the Comoros. The dendrogram was constructed with a fragment of 641 bp, with the TIMef+I+G substitution model, and with 1,000 replications. Only bootstrap supports >70% are shown (circles). The precise geographic information of the sampled bats can be accessed through the GenBank accession numbers indicated in parentheses at branch tips. Host bat species for the sequences generated in this study are shown in boldface. Scale bar indicates number of nucleotide substitutions per site.

¹These authors contributed equally to this article.

Author affiliations: Centre de Recherche et de Veille sur les Maladies Émergentes dans l'Océan Indien, Ste. Clotilde, La Réunion, France (E. Lagadec, Y. Gomard, V. Guernier, M. Dietrich, H. Pascalis, S. Temmam, P. Tortosa, K. Dellagi); Université de Lyon, Villeurbanne, France (E. Lagadec, S. Temmam); Université de La Réunion, St. Clotilde (M. Dietrich, P. Tortosa); Université d'Antananarivo, Antananarivo, Madagascar (B. Ramasindrazana); Association Vahatra, Antananarivo (B. Ramasindrazana, S.M. Goodman); Field Museum of Natural History, Chicago, Illinois, USA (S.M. Goodman); and Institut de Recherche pour le Développement, Ste. Clotilde (Y. Gomard, V. Guernier, H. Pascalis, S. Temmam, K. Dellagi)

DOI: http://dx.doi.org/10.3201/eid1810.111898

References

- Pappas G, Papadimitriou P, Siozopoulou V, Christou L, Akritidis N. The globalization of leptospirosis: worldwide incidence trends. Int J Infect Dis. 2008;12:351–7. http://dx.doi.org/10.1016/j.ijid.2007. 09.011
- Rahelinirina S, Leon A, Harstskeerl RA, Sertour N, Ahmed A, Raharimanana C, et al. First isolation and direct evidence for the existence of large small-mammal reservoirs of *Leptospira* sp. in Madagascar. PLoS One. 2010;5:e14111. http://dx.doi. org/10.1371/journal.pone.0014111
- Bourhy P, Collet L, Clément S, Huerre M, Ave P, Giry C, et al. Isolation and characterization of new *Leptospira* genotypes from patients in Mayotte (Indian Ocean). PLoS Negl Trop Dis. 2010;4:e724. http://dx.doi.org/10.1371/ journal.pntd.0000724
- Yersin C, Bovet P, Mérien F, Wong T, Panowsky J, Perolat P. Human leptospirosis in the Seychelles (Indian Ocean): a population-based study. Am J Trop Med Hyg. 1998;59:933–40.
- Desvars A, Cardinale E, Michault A. Animal leptospirosis in small tropical areas. Epidemiol Infect. 2011;139:167– 88. http://dx.doi.org/10.1017/S09502688 10002074
- Matthias MA, Díaz MM, Campos KJ, Calderon M, Willig MR, Pacheco V, et al. Diversity of bat-associated *Leptospira* in the Peruvian Amazon inferred by Bayesian phylogenetic analysis of 16S ribosomal DNA sequences. Am J Trop Med Hyg. 2005;73:964–74.

- Smythe LD, Smith IL, Smith GA, Dohnt MF, Symonds ML, Barnett LJ, et al. A quantitative PCR (TaqMan) assay for pathogenic *Leptospira* spp. BMC Infect Dis. 2002;2:13. http://dx.doi. org/10.1186/1471-2334-2-13
- Fenner JS, Anjum MF, Randall LP, Pritchard GC, Wu G, Errington J, et al. Analysis of 16S rDNA sequences from pathogenic *Leptospira* serovars and use of single nucleotide polymorphisms for rapid speciation by D-HPLC. Res Vet Sci. 2010;89:48–57. http://dx.doi. org/10.1016/j.rvsc.2009.12.014
- Lourdault K, Aviat F, Picardeau M.
 Use of quantitative real-time PCR
 for studying the dissemination of
 Leptospira interrogans in the guinea pig
 infection model of leptospirosis. J Med
 Microbiol. 2009;58:648–55. http://dx.doi.
 org/10.1099/jmm.0.008169-0
- Silverie R, Monnier M, Lataste-Dorolle C. Recent survey of leptospirosis on Madagascar. Contribution to the study of human, bovine and porcine leptospirosis in the southern region [in French]. Bull Soc Pathol Exot Filiales. 1968;61:346–59.

Address for correspondence: Pablo Tortosa, CRVOI, Plateforme de Recherche CYROI, 2 Rue Maxime Rivière, 97490 St. Clotilde, France; email: pablo.tortosa@univ-reunion.fr

West Nile Virus Meningoencephalitis Imported into Germany

To the Editor: West Nile virus (WNV) is a single-stranded RNA virus in the family *Flaviviridae* that is transmitted to humans by mosquitoes. Approximately 80% of WNV infections in humans are asymptomatic, whereas ≈20% of infected persons experience fever, often accompanied by a rash. Less than 1% of infections are manifested as neuroinvasive disease, such as meningoencephalitis, polyradiculoneuritis, and poliolike flaccid paralysis (*I*). WNV is

endemic in Africa, southern Asia, and northern Australia, and only sporadic cases or small epidemics are seen in Europe (2). In 1999, WNV emerged in North America. By 2010, ≈1.8 million persons had become infected, with 12,852 reported cases of meningoencephalitis and 1,308 deaths (2). In Europe, the last notable outbreak of WNV infection occurred in Greece in 2010; 197 persons were infected, and 33 died (3). The Czech Republic, Denmark, France, and the Netherlands reported laboratoryconfirmed WNV infections in travelers returning from North America (1).

We report a case of WNV meningoencephalitis in a 28-year-old German woman, who sought treatment the emergency department of a hospital in Potsdam, Germany, on September 7, 2011. She had a 3-day history of fever of up to 40°C and mental confusion. Six days before admission, she had returned from a 2-week holiday trip to Ottawa, Ontario, Canada. She had spent most of her time in the city of Ottawa.

The patient's medical history was unremarkable. She was in a reduced general condition because of a severe encephalitic syndrome characterized by somnolence, meningism, fever, and mental confusion. Laboratory investigations revealed leukocytosis with 15.000 leukocytes/µL (reference 4,400-11,300 range leukocytes/ μL) and elevated C-reactive protein of 14.8 mg/L (reference <3 mg/L). Cerebrospinal fluid (CSF) analysis on the day of admission showed pleocytosis, 430 cells/μL (72% granulocytes, 27% lymphocytes. and 1% monocytes); elevated levels for total protein, 1,023 mg/L (reference range 150-450 mg/L); an albumin level of 637 mg/L (normal range 0-350 mg/L); and a moderately elevated level of the albumin quotient of 20 (reference range <6.5). The CSF/serum diagrams demonstrated a moderate disturbance of the blood-CSF barrier and a substantial intrathecal IgM synthesis of 27.6%

3. Résultats majeurs

Cette étude met en évidence des leptospires dans la faune sauvage des îles de l'Union des Comores, et plus largement chez les chiroptères de la région. Plusieurs espèces de chauves-souris de l'Union des Comores et de Madagascar sont infectées par des leptospires pathogènes. Sur la base de séquences au locus ARNr 16S, nous montrons une diversité importante de leptospires pathogènes comprenant des lignées connues (*Leptospira interrogans* et *L. borgpetersenii*) et des lignées génétiquement distantes des espèces pathogènes connues à ce jour et constituant probablement des taxons originaux.

Chapitre III : Associations hôtes-leptospires et évolution des leptospires au sein de leurs hôtes

1. Le cas des leptospires pathogènes des chauves-souris de Madagascar

Les régions tropicales sont caractérisées par une diversité spécifique importante qui diminue à mesure que la latitude augmente. Ce patron, plus connu sous le terme de loi de Rapoport, a été peu investigué au niveau des micro organismes même si quelques études semblent indiquer que cette loi s'applique aux microbes (Guernier et al. 2004). Dans le chapitre précédent, nous avons mis en évidence une diversité importante de leptospires au sein des chauves-souris de l'Union des Comores et de Madagascar. Cette dernière étude correspondait à une investigation préliminaire et était basée sur un nombre limité d'espèces (n=12) et sur des séquences au locus 16S bactérien (rrs2) faiblement polymorphe et donc peu discriminant (Ahmed et al. 2006). Les leptospires pathogènes sont connus pour (i) être extrêmement diversifiés et (ii) infecter une large gamme d'hôtes; en revanche très peu d'études ont exploré leur spécificité d'hôte. Une étude réalisée à Mayotte a montré que la seule espèce Rattus rattus pouvait être infectée par quatre espèces distinctes de leptospires (Desvars et al. 2012). Des études menées sur d'autres espèces réservoirs suggèrent une spécificité d'hôte plus stringente même si le nombre d'espèces explorées et les méthodes (sérologique/moléculaire) ne permettent pas de dégager de règle concernant la spécificité de ces bactéries pour leurs hôtes. Nous avons utilisé le modèle des chiroptères malgaches pour déterminer si la diversité des leptospires associés est structurée par des variables géographiques ou au contraire par une spécificité d'hôte et donc par l'occurrence des espèces hôtes sur un territoire.

Le modèle chiroptères malgaches/leptospires pathogènes a été choisi pour différentes raisons. La grande île héberge une diversité de chiroptères remarquable constituée de neuf familles de chiroptères comprenant pas moins de 45 espèces distinctes dont 80% sont endémiques (Goodman 2011 ; Goodman & Ramasindrazana 2013 ; Foley *et al.* 2015). Par ailleurs, la distribution et l'écologie de ces chiroptères permettent d'investiguer les déterminants de la structuration des pathogènes associés : certaines espèces sont largement distribuées sur l'île alors que d'autres ont des aires de distribution très limitées (Goodman & Ramasindrazana 2013). Ces chiroptères occupent des niches écologiques particulières telles que les grottes, les arbres et/ou les constructions humaines (espèces synanthropiques), voire différentes niches pour une même espèce (exemple : les espèces de Molossidae). Enfin, au

sein d'un même gîte, on peut retrouver plusieurs espèces distinctes vivant en sympatrie⁷ voire en syntonie⁸, à savoir en contact physique au sein d'une même colonie. Ainsi, plusieurs du genre *Miniopterus* de la famille des Miniopteridae sont régulièrement retrouvées en syntonie avec *Myotis goudoti*, espèce appartenant à une famille différente : Vespertilionidae (Goodman 2011 ; Goodman & Ramasindrazana 2013).

Au delà de ces considérations écologiques, il est à noter que les hôtes et les parasites investigués ici appartiennent à des ordres anciens et permettent donc d'explorer les histoires évolutives des deux partenaires sur des pas de temps importants. L'ordre des chiroptères remonte à plus de 50 millions d'années (Teeling *et al.* 2005) et constitue après les rongeurs, le deuxième groupe de mammifère le plus diversifié avec plus de 1 100 espèces reconnues (Simmons 2005). La biogéographie de nombreuses espèces chiroptères malgaches a été étudiée et a révélée une origine africaine pour la majorité des espèces (Goodman & Benstead 2003). Des études complètes ont montré, par exemple, que les nombreuses espèces du genre *Miniopterus* résultaient de deux à trois événements de colonisation remontant à 4,5 millions d'années suivis par de une radiation locale (Christidis *et al.* 2014). Les leptospires pathogènes sont elles mêmes très diversifiés et appartiennent à l'ordre des spirochètes qui sont issues d'une évolution très ancienne (Saier 2000 ; Charon & Goldstein 2002).

En se basant sur un important échantillonnage de chauves-souris représentant 31 espèces (18 genres et 7 familles) issues de différents sites et régions bioclimatiques de Madagascar, les objectifs de la présente étude étaient (i) d'évaluer la diversité génétique des leptospires hébergés par les chiroptères malgaches; (ii) d'identifier des déterminants de structuration de ces communautés des leptospires et enfin (iii) de comprendre quels sont les évènements évolutifs (co-spéciation⁹, host-switch¹⁰, duplication¹¹, lineage sorting¹²) ayant conduit à cette diversité (Figure 21). Les résultats de cette étude on été soumis pour publication à la revue FEMS Microbiology Ecology, en Septembre 2015, manuscrit actuellement en révision.

.

⁷ Espèces occupant un même habitat.

⁸ Espèces sympatriques en contact physique.

⁹ Spéciation du parasite durant la spéciation de l'hôte.

¹⁰ Changement d'espèce hôte et spéciation du parasite sur la nouvelle espèce hôte.

¹¹ Spéciation du parasite au sein de l'hôte sans spéciation de l'hôte (spéciation intra hôte).

¹² Après la spéciation de l'hôte, le parasite ne va se maintenir que sur une des nouvelles espèces.

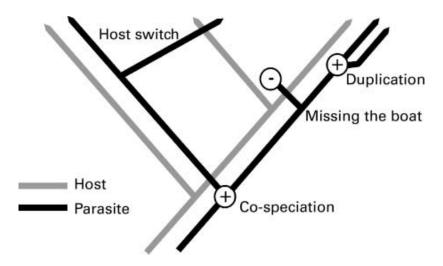


Figure 11. Evènements évolutifs dans les associations hôtes-parasites: Co-spéciation, hostswitch, duplication et lineage sorting (missing the boat) (d'après Widmann (2012) adapté de Paterson & Gray (1997) et de Taraschewski (2006)).

2. Article 3

Malagasy bats shelter a considerable diversity of pathogenic *Leptospira* displaying a strong host-specifity pattern

Gomard Y, Dietrich M, Wieseke N, Ramasindrazana B, Lagadec E, Goodman S M, Dellagi K and Tortosa P.

Lors de la rédaction de ce manuscrit, cet article était en révision dans la revue FEMS Microbiology Ecology et a été accepté par la suite dans cette même revue. Ci – dessous les nouvelles références de l'article publié:

Gomard Y, Dietrich M, Wieseke N *et al.* Malagasy bats shelter a considerable genetic diversity of pathogenic *Leptospira* suggesting notable host-specificity patterns.

FEMS Microbiol Ecol 2016: fiw037.

Pour des raisons de résolutions d'images, nous avons également inséré les versions d'origines des figures soumises.

FEMS Microbiology Ecology




http://mc.manuscriptcentral.com/fems

Malagasy bats shelter a considerable diversity of pathogenic Leptospira displaying a strong host-specificity pattern

Journal:	FEMS Microbiology Ecology						
Manuscript ID	Draft						
Manuscript Type:	: Research article						
Date Submitted by the Author:	n/a						
Complete List of Authors:	Gomard, Yann; CRVOI, Centre de Recherche et de Veille sur les maladies émergentes dans l'Océan Indien; UMR PIMIT - Processus Infectieux en Milieu Insulaire Tropical INSERM U1187, CNRS 9192, IRD 249, Université de La Réunion Dietrich, Muriel; CRVOI, Centre de Recherche et de Veille sur les maladies émergentes dans l'Océan Indien; University of Pretoria, Department of Microbiology and Plant Pathology, Faculty of Natural and Agricultural Sciences Wieseke, Nicolas; University of Leipzig, Parallel Computing and Complex Systems Group, Faculty of Mathematics and Computer Science Ramasindrazana, Beza; CRVOI, Centre de Recherche et de Veille sur les maladies émergentes dans l'Océan Indien; UMR PIMIT - Processus Infectieux en Milieu Insulaire Tropical INSERM U1187, CNRS 9192, IRD 249, Université de La Réunion; Association Vahatra, Scientific Counselor Lagadec, Erwan; CRVOI, Centre de Recherche et de Veille sur les maladies émergentes dans l'Océan Indien; UMR PIMIT - Processus Infectieux en Milieu Insulaire Tropical INSERM U1187, CNRS 9192, IRD 249, Université de La Réunion Goodman, Steven; Field Museum of Natural History, Science and Education; Association Vahatra, Scientific Counselor Dellagi, Koussay; CRVOI, Centre de Recherche et de Veille sur les maladies émergentes dans l'Océan Indien; UMR PIMIT - Processus Infectieux en Milieu Insulaire Tropical INSERM U1187, CNRS 9192, IRD 249, Université de La Réunion; IRD La Réunion, Institut de Recherche pour le Développement Tortosa, Pablo; CRVOI, Centre de Recherche et de Veille sur les maladies émergentes dans l'Océan Indien; UMR PIMIT - Processus Infectieux en Milieu Insulaire Tropical INSERM U1187, CNRS 9192, IRD 249, Université de La Réunion; IRD La Réunion, Institut de Recherche pour le Développement Tortosa, Pablo; CRVOI, Centre de Recherche et de Veille sur les maladies émergentes dans l'Océan Indien; UMR PIMIT - Processus Infectieux en Milieu Insulaire Tropical INSERM U1187, CNRS 9192, IRD 249, Université de La Réunion						
Keywords:	Leptospira, Chiroptera, Madagascar, host-parasite association, host- specificity, co-phylogeny						

SCHOLARONE™ Manuscripts



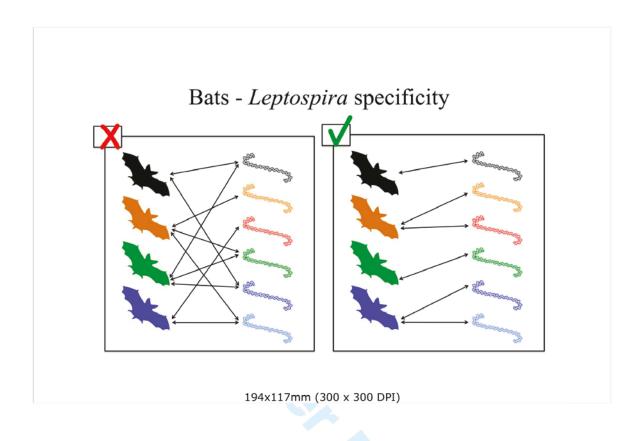

1	Malagasy	bats s	shelter	a c	consid	lerabl	e d	liversity	of	patl	nogeni	c I	<i>Leptospira</i>

2 displaying a strong host-specificity pattern.

- 4 Yann Gomard^{1,2}, Muriel Dietrich^{1,3}, Nicolas Wieseke⁴, Beza Ramasindrazana^{1,2,5}, Erwan
- 5 Lagadec^{1,2}, Steven M. Goodman^{5,6}, Koussay Dellagi^{1,2,7}, and Pablo Tortosa^{1,2,*}
- 6 Centre de Recherche et de Veille sur les maladies émergentes dans l'Océan Indien (CRVOI), 97490 Sainte Clotilde, La
- 7 Réunion, France, ²Université de La Réunion, UMR PIMIT "Processus Infectieux en Milieu Insulaire Tropical", INSERM U
- 8 1187, CNRS 9192, IRD 249. Plateforme de Recherche CYROI, 97490 Sainte Clotilde, Saint-Denis, La Réunion, France,
- 9 Department of Microbiology and Plant Pathology, Faculty of Natural and Agricultural Sciences, University of Pretoria,
- 10 Pretoria 0002, South Africa, ⁴Parallel Computing and Complex Systems Group, Faculty of Mathematics and Computer
- Science, University of Leipzig, Augustusplatz 10, D-04109 Leipzig, Germany, ⁵Association Vahatra, BP 3972, Antananarivo
- 12 101, Madagascar, ⁶Field Museum of Natural History, 1400 South Lake Shore Drive, Chicago, IL 60605-2496, United States
- 13 of America, ⁷Institut de Recherche pour le Développement (IRD), 97490 Sainte Clotilde, La Réunion, France.
- *Corresponding author: CRVOI, UMR PIMIT, Université de La Réunion, INSERM 1187, CNRS 9192, IRD 249,
- 16 Plateforme de Recherche CYROI, 2 rue Maxime Rivière, 97490 Ste Clotilde, La Réunion, France. Tel: +262 262 938 820
- Fax: +262 262 938 801. E-mail: pablo.tortosa@univ-reunion.fr

- 19 Running title: Leptospira host-specificity in Malagasy Chiroptera
- 20 One sentence summary: This study highlights the high diversity of Leptospira in Madagascar bats and demonstrates that
- this diversity is structured by a strong host-specifity pattern.

ABSTRACT

Pathogenic Leptospira are the causative agents of leptospirosis, a disease of global concern with major impact in tropical regions. Despite the importance of this zoonosis for human health, the evolutionary and ecological drivers shaping bacterial communities in vertebrate host reservoirs remain poorly investigated. Here, we describe Leptospira communities hosted by Malagasy bats, composed of mostly endemic species, in order to characterize hostpathogen associations and investigate their evolutionary histories. We screened 947 individual bats (representing 31 species, 18 genera and seven families) for Leptospira infection and subsequently genotyped positive samples using three different bacterial *loci*. Molecular identification showed that these Leptospira are notably diverse and include several distinct lineages mostly belonging to two dominant species: L. borgpetersenii and L. kirschneri. The exploration of the most probable host-pathogen evolutionary scenarios suggests that bacterial diversity results from a combination of events related to the ecology and the evolutionary history of their hosts. Importantly, the remarkable host-specificity highlighted herein together with a lack of geographical structuration of bacterial diversity indicate that the Leptospira community at a given site depends on the co-occurring bat species assemblage. The implications of such tight host-specificity on the epidemiology of leptospirosis are discussed.

co-phylogeny.

Keywords: Leptospira, Chiroptera, Madagascar, host-parasite association, host-specificity,

INTRODUCTION

Bats (Order Chiroptera) represent the second most diversified group of mammals on Earth, with over 1,100 recognized species (Simmons 2005). These flying mammals play important roles in ecological processes (Kunz et al. 2011) and are known reservoirs of numerous pathogens, including zoonotic viruses that in some cases have been comprehensively studied mainly due to their medical importance (Calisher et al. 2006; Wong et al. 2007; Chomel et al. 2015). However, the ecological factors and evolutionary processes shaping this microbial diversity remain poorly understood.

Among bat infecting agents, bacteria have been less explored as compared to viruses, but different investigations have reported bats as carriers of pathogenic *Leptospira* (Emanuel, Mackerras and Smith 1964; Fennestad and Borg-Petersen 1972; Bunnell et al. 2000; Smythe et al. 2002a; Cox, Smythe and Leung 2005; Matthias et al. 2005; Zetun et al. 2009; Franco Bessa et al. 2010; Tulsiani et al. 2011; Desvars et al. 2012; Lagadec et al. 2012; Mgode et al. 2014; Ogawa et al. 2015), the etiological agent of leptospirosis, a prototypical environmental zoonosis with a nearly global distribution. The bacterial cycle is maintained in nature by infected mammals, which excrete living *Leptospira* in their urine, contaminating the environment where the bacteria remain viable for several months. Humans are accidentally infected, either during outdoor activities through contact with contaminated water or mud, or via direct exchange with infected animal secretions (Levett 2001; Bharti et al. 2003; Adler & de la Peña Moctezuma 2010).

Leptospira are typically classified into serovars and serogroups according to their antigenic determinants (Ahmed et al. 2012). More recently, genetic classifications have been developed allowing the identification of Leptospira species, including pathogenic species such as L. interrogans, L. borgpetersenii, L. kirschneri and L. mayottensis (Ahmed et al.

2006; Lehmann et al. 2013; Bourhy et al. 2014).

Studies have revealed a high diversity of *Leptospira* in bats, some of which are highly divergent from known lineages (Matthias et al. 2005; Lagadec et al. 2012; Dietrich et al. 2014). Using a multilocus sequence analysis, Dietrich et al. (2014) showed tight host-parasite specificity between *Leptospira* spp. and endemic Malagasy small terrestrial mammals (rodents [Nesomyinae] and tenrecs [Tenrecidae]) and some Malagasy bats species, suggesting that long-term co-evolution has shaped *Leptospira* diversity in these animals. However, Lei and Olival (2014) recently proposed that *Leptospira* diversity in bats is structured by geography rather than by the phylogenetic relationships of their hosts. Given that bats evolved relatively deep in geological time (Agnarsson et al. 2011) and are a highly diversified order (Simmons 2005) occupying different ecological niches, they represent an outstanding biological model to investigate the biotic and abiotic drivers shaping host–parasite associations.

Considered as one of the five most important hot spots of macro-organism biodiversity in the world (Myers et al. 2000), Madagascar shelters over 46 bat species of which nearly 80% are endemic (Goodman and Ramasindrazana 2013; Goodman et al. 2015a;b). Of interest in the present work, Malagasy bats occupy different types of day roosts, including synanthropic structures and natural sites (such as caves), often composed of distinct taxonomic assemblages with certain species in physical contact (Goodman 2011). Moreover, some of these taxa have broad distributions on the island, while others are geographically limited (Goodman and Ramasindrazana 2013). These different aspects allow testing for geographical *vs.* taxonomical structure of bacterial diversity within these organisms.

In the present work, we screened 947 bats representing 31 species sampled along a

broad north-south transect encompassing distinct bioclimatic zones of the island, to analyse

the effect of host specificity and geography on the structure of *Leptospira* diversity. For this, samples were screened through RT-PCR for *Leptospira* infection and positive samples were further genotyped using three housekeeping genes as markers. The role of host species assemblages on the composition of *Leptospira* was investigated at the roost site scale and the geographical patterns of bacteria distribution was tested across sampling sites. Finally, cophylogenetic signal and evolutionary scenarios that may account for the contemporary bat-*Leptospira* associations were evaluated using both distance- and event-based approaches.

MATERIALS AND METHODS

Study design and sampling

Bats were sampled on Madagascar from February 2012 to March 2013 in the context of a multi-level research program examining the taxonomy and biogeography of the island's bat fauna (e.g. Goodman and Ramasindrazana 2013; ; Goodman et al. 2015a;b; Christidis et al. 2014) with the description of their associated micro- and ecto-parasites (Tortosa et al. 2013; Duron et al. 2014; Wilkinson et al. 2014). Bats were trapped using mist nets, harp traps and butterfly nets in different natural or synanthropic habitats, encompassing four of the five recognized bioclimatic zones of the island (Cornet 1974). Specimens were captured, manipulated and euthanized following guidelines accepted by the scientific community for the handling of wild mammals (Sikes and Gannon 2011) and in strict accordance with permits issued by Malagasy national authorities (see further details in the acknowledgements section). Herein we use the designation *Miniopterus manavi* (sensu lato) for members of this genus captured at Ambohitantely, where a range of divergent forms of this species complex occur in sympatry (Goodman et al. 2015b). Standard external morphological measurements were taken from each individual and tissue samples preserved in liquid nitrogen soon after the animals

were dispatched. Once back to the laboratory, the samples were stored at -80°C until molecular analyses. Voucher specimens were deposited at the Université d'Antananarivo, Département de Biologie Animale (UADBA), Antananarivo, and at the Field Museum of Natural History (FMNH), Chicago.

DNA extraction, Leptospira detection and prevalence

For each specimen, total nucleic acids were extracted from a pool of kidney, spleen and lung tissues using EZ1Virus Mini Kits version 2.0 (Qiagen, Les Ulis, France) on an EZ1 Biorobot as previously described (Wilkinson et al. 2012). A Reverse Transcription step was performed on total nucleic acids with GoScript Reverse Transcriptase (Promega, Madison, WI) and molecular detection was carried out on cDNA with a Real Time – Polymerase Chain Reaction (RT-PCR) using a pathogenic *Leptospira* specific fluorescent probe targeting the 5' end of the 16S encoding gene, following a previously described procedure (Smythe et al. 2002b). We used a Fisher's exact test implemented in R software version 2.15.3 (R Core Team 2013) to test the significance of difference in infection rates among bat species.

Leptospira identification

Leptospira were identified to the species level by sequencing a portion of secY, a highly polymorphic housekeeping gene (Ahmed et al. 2006) commonly used for the determination of members of this genus (Perez and Goarant 2010; Dietrich et al. 2014). In addition, Leptospira phylogenies were constructed using two additional genes, adk and rrs2, both markers used in combination with secY in a previously described multilocus sequence typing (MLST) scheme (Ahmed et al. 2006), which was recently optimized by Dietrich et al. (2014). In each reaction, Polymerase Chain Reaction (PCR) mixture contained 12.5 μL of GoTaq Hot Start Green

Master Mix 2X (Promega, Madison, WI), 1 μ L (10 mM) of each primer, 8.5 μ L of nuclease free water and 2 μ L of cDNA. The PCR conditions consisted of an initial denaturation step at 95°C for 5 min followed by 45 cycles at 94°C for 30 s, 52 – 56°C for 30 s and 72°C for 1 min and a final elongation step of 7 min at 72°C. PCR products were visualized under UV light after electrophoresis on a 2% agarose gel stained with 1X GelRedTM (Biotium Inc.) and sequenced on both strands through direct Sanger sequencing (Genoscreen, Lille, France) using the same amplification primer set.

Phylogenetic analyses

Nucleotide sequences were verified, corrected by visual inspection and aligned under the software Geneious pro software v.5.4 (Drummond et al. 2011). Nucleotide polymorphism was evaluated for each gene by quantifying the number of polymorphic sites using DnaSP 5.10.01 (Librado and Rozas 2009). The model of sequence evolution that best fit the data was determined for each marker using jModelTest v.0.1.1 (Posada 2008) based on the Akaike Information Criterion (AIC). Phylogenies were first constructed separately for each marker using sequences generated in the present work together with those available on GenBank (see Supplementary Table 1). Phylogenetic constructions were carried out using Bayesian Inference analyses implemented in MrBayes 3.1.2 (Ronquist and Huelsenbeck 2003). The analyses consisted of two independent runs of four incrementally heated Metropolis Coupled Markov Chain Monte Carlo (MCMCMC) starting from a random tree. MCMCMC was run for 2,000,000 generations with trees and associated model parameters sampled every 100 generations. For each phylogeny, the convergence level was validated by an average standard deviation of split frequencies inferior to 0.05. The initial 10% of trees from each run were discarded as burn-in and the consensus phylogeny and posterior probabilities were obtained

from the remaining trees. The congruence between topologies obtained using each specific marker was verified using the Incongruence Length Difference (ILD) test implemented in PAUP 4.0b10 (Swofford 2002).

Genetic diversity and structure of bat-borne Leptospira

Although adk and sec Y markers both display a relatively high level of polymorphism, the number of obtained sequences was more important for secY (see results). Hence, only secY data were used to analyze the genetic structure of *Leptospira*, in order to maximize the number of species and sampling sites integrated into the analyses. The relative role of host specificity vs. spatial structure in shaping Leptospira diversity was examined by performing a molecular variance analysis (AMOVA) implemented in ARLEQUIN v.3.5.1.3 (Excoffier and Lischer 2010). In our analyses, a "population" corresponds to Leptospira sequences obtained from a single bat species at a given sampling site. Geographical structure was firstly addressed by grouping populations by bioclimatic regions (humid, sub-humid, dry and subarid) (Cornet 1974) and subsequently by grouping populations by sampling site. Host specificity was analyzed by grouping populations at the level of host family (Hipposideridae, Miniopteridae, Molossidae, Pteropodidae, Rhinonycteridae and Vespertilionidae). The significance levels of the fixation indices were obtained using 1023 nonparametric permutations. Finally, we assessed the role of host species community composition in shaping Leptospira diversity by analysing the correlation between host species richness at a given sampling site and the number of detected *Leptospira* haplotypes, using a Pearson's R correlation test under R software version 2.15.3 (R Core Team 2013).

Co-phylogeny

Host-parasite associations were analysed using the phylogenies of bats and associated *Leptospira*. We specifically used sequentially a pruned phylogeny of *secY*, *adk* and *rrs2*, which resulted in a tree including only one sequence by well-supported *Leptospira* group detected in the Bayesian analyses. Thus, we defined 17, 12 and 22 *Leptospira* groups for *secY*, *adk* and *rrs2*, respectively. Bat phylogenies were built using the mitochondrial cytochrome b encoding gene (*cyt b*) available from GenBank (see Supplementary Table 2). In the case of Malagasy bat species for which *cyt b* sequences were incomplete or not available (*Hipposideros commersoni*, *Triaenops menamena*, *Paratriaenops furculus*, *Mormopterus jugularis*, *Neoromicia robertsi* and *Otomops madagascariensis*), PCRs and subsequent *cyt b* sequencing were carried out using L14724 and H15915 primers (Irwin, Kocher and Wilson 1991) (see Supplementary Table 2). Finally, bat and pruned bacteria phylogenies were generated by Maximum Likelihood under GTR + G model with RAxML (v.8.0.26) (Stamatakis 2006) by using rapid bootstrapping with 1,000 repetitions using the RAxML GUI (Silvestro and Michalak 2011). Parasite-host associations were visualized using TreeMap 3b software (Charleston 2011).

In order to assess the levels of congruence between bats and *Leptospira* phylogenies, two programs based on global-fit methods were used: ParaFit (Legendre, Desdevises and Bazin 2002) and Procrustean Approach to Cophylogeny (PACo) (Balbuena, Míguez-Lozano and Blasco-Costa 2013). These programs require two input matrixes of patristic distances obtained from bat and *Leptospira* phylogenies together with a matrix of parasite-host associations (presence/absence of a *Leptospira* lineage in a bat species). The null hypothesis tested by ParaFit is a random association between parasites and hosts, while PACo tests the dependence of parasite and host phylogenies (Balbuena, Míguez-Lozano and Blasco-Costa 2013). ParaFit and PACo were performed with 999 and 10,000 permutations, respectively.

Both tests were conducted using R software version 2.15.3 (R Core Team 2013) with APE package (version 3.0-8) (Paradis, Claude and Strimmer 2004) for both ParaFit and PACo, and with VEGAN packages (version 2.0-7) (Dixon 2003) for PACo.

Investigation of evolutionary history of host–parasite association

The reconciliation tool CoRe-PA version 0.5.1 (Merkle, Middendorf and Wieseke 2010), an event-based tree reconciliation program, was used to determine the most probable evolutionary scenarios (considering co-speciation, sorting, duplication and host-switching events) leading to the contemporary structure of *Leptospira* spp. within Malagasy bats. CoRe-PA is able to incorporate timing information to restrict possible co-evolutionary scenarios. An applicable timing for the nodes of the aforementioned phylogenetic trees was computed using the branch lengths of the given tree. As a first step, the branch lengths were adjusted to obtain trees with all paths from the root to a leaf having the same length. Thereafter, an optimization problem was defined using integer linear programming (ILP) (Wolsey and Nemhauser 1999). For each branch length b i of a branch i, a factor/multiplier f i, ranging from 0.25 to 4.0 was sought, such that for the tree with adjusted branch lengths b i*f i all paths from the root to a leave were equal. From all possible sets of factors, the set finally selected was the one minimizing the branch length adjustment \sum i |b i-(b i*f i)|. In a second step, time zones were assigned to nodes with root node designated to time zone 0 and leaves to time zone 10. The inner nodes were assigned to time zones proportionally to the length of the path from the root to the respective node in the adjusted tree. In order to lower the stringency of evolutionary scenario selection, a time zone interval of \pm 5 of the previously computed time zones was assigned to each node of the Leptospira tree. CoRe-PA analyses were performed using the "rank" and "automatic cost evaluation" options with 5,000 random

- 237 cycles. The statistical significance was assessed with 100 reconstructions of the same trees
- and randomly generated *Leptospira* bat leaf-to-leaf associations.



RESULTS

Bats sampling

In total, tissue samples from 947 bat specimens representing 31 species, 18 genera and seven families (Table 1) were obtained from 52 sites on Madagascar (see Supplementary Table 3). The sampling was conducted in caves (n = 22), synanthropic sites (n = 18) and forested zones (outdoor trapping) (n = 12). Thirty-nine percent (n = 7) of synanthropic sites were composed of two or three bat species and harboured only Molossidae species: *Chaerephon* spp., *Mops* spp. and *Mormopterus jugularis*. Seventy-three percent (n = 16) of caves contained two to seven sympatric bat species. Within these sites, the bats composition varied from two bat families (example: Miniopteridae and Vespertilionidae or Hipposideridae and Molossidae) to five families (example: Hipposideridae, Miniopteridae, Molossidae, Rhinonycteridae and Vespertilionidae). Few details are available about possible physical contact between sympatric bat taxa. However, some Miniopteridae species are known to occur in syntopy, *i.e.* with physical contact within the colony; the same pattern has been reported for *Miniopterus* spp. and *Myotis goudoti* (Vespertilionidae) (Goodman 2011). Of interest, in the present study, six caves harboured at least two different *Miniopterus* spp. and in five caves, *Myotis goudoti* occurred in sympatry with at least one *Miniopterus* sp. (see Supplementary Table 3).

Leptospira detection and identification

Real-Time PCR revealed 203 positive samples, indicating a global *Leptospira* infection rate of 21.4% and at least one infected bat species per family (Table 1). At the species level, 18 of the 31 bat taxa were infected, with significant differences in leptospiral infection between species (P-value < 0.001, Fisher's exact test). Herein, we report *Leptospira* infection in seven bat species that have not been previously investigated: *Coleura kibomalandy*

Table 1. *Leptospira* detection in Malagasy bats by Real-Time PCR. Infected species are indicated in bold. I: insectivorous species, F: frugivorous species.

Bat family	Bat species	Sample size	Number positive (%)	
Emballonuridae (I)	Coleura kibomalandy	3		
(n = 9)	Paremballonura tiavato	6	0	
Hipposideridae (I) (n = 27)	Hipposideros commersoni	27	13 (48.1)	
	Miniopterus aelleni	7	(%) 1 (33.3) 0 13 (48.1) 0 14 (73.7) 0 5 (71.4) 10 (8.6) 45 (50.6) 2 (28.6) 13 (59.1) 0 1 (1.1) 0 27 (17.8) 4 (10.3) 1 (7.1) 27 (64.3) 0 2 (10.0) 15 (30.6) 0 21 (43.8) 0 0 1 (100.0) 0 0	
	Miniopterus manavi sensu lato	19	14 (73.7)	
	Miniopterus gleni	22	0	
Miniopteridae (I)	Miniopterus griffithsi	7	5 (71.4)	
(n = 289)	Miniopterus griveaudi	116	10 (8.6)	
	Miniopterus mahafaliensis	89	45 (50.6)	
	Miniopterus majori	3 1 (33.3 6 0 0 27 13 (48.1 7 0 19 14 (73.7 22 0 7 5 (71.4 116 10 (8.6 89 45 (50.6 7 2 (28.6 22 13 (59.1 34 0 94 1 (1.1) 68 0 19 0 152 27 (17.8 39 4 (10.3 14 1 (7.1) 42 27 (64.3 11 0 20 2 (10.0 49 15 (30.6 2 0 48 21 (43.8 2 0 44 0 1 1 (100.6 8 0 0 11 0 3 0 0 11 0 0 3 0 0 11 0 0 3 0 0	2 (28.6)	
	Miniopterus sororculus	22	1 (33.3) 0 13 (48.1) 0 14 (73.7) 0 5 (71.4) 10 (8.6) 45 (50.6) 2 (28.6) 13 (59.1) 0 1 (1.1) 0 27 (17.8) 4 (10.3) 1 (7.1) 27 (64.3) 0 2 (10.0) 15 (30.6) 0 21 (43.8) 0 0 1 (100.0) 0 0 0	
	Chaerephon atsinanana	34	0	
	Chaerephon leucogaster	94	1(1.1)	
Molossidae (I)	Mops leucostigma	68	0	
(n = 406)	Mops midas	19	0	
	Mormopterus jugularis	152	27 (17.8)	
	Otomops madagascariensis	39	4 (10.3)	
Rhinonycteridae (I)	Paratriaenops furculus	14	1 (7.1)	
(n=56)	Triaenops menamena	42	(%) 1 (33.3) 0 13 (48.1) 0 14 (73.7) 0 5 (71.4) 10 (8.6) 45 (50.6) 2 (28.6) 13 (59.1) 0 1 (1.1) 0 27 (17.8) 4 (10.3) 1 (7.1) 27 (64.3) 0 2 (10.0) 15 (30.6) 0 21 (43.8) 0 0 1 (100.0) 0 0	
Pr EL (T)	Eidolon dupreanum	11	0	
Pteropodidae (F) (n = 80)	Pteropus rufus	20	2 (10.0)	
(n – 60)	Rousettus madagascariensis	49	15 (30.6)	
	Hypsugo bemainty	2	0	
	Myotis goudoti	48	21 (43.8)	
	Neoromicia malagasyensis	malandy 3 1 (33.3) ra tiavato 6 0 ommersoni 27 13 (48.1) saelleni 7 0 avi sensu lato 19 14 (73.7) s gleni 22 0 griffithsi 7 5 (71.4) griveaudi 116 10 (8.6) shafaliensis 89 45 (50.6) s majori 7 2 (28.6) ororculus 22 13 (59.1) stsinanana 34 0 eucogaster 94 1 (1.1) estigma 68 0 ingularis 152 27 (17.8) stascariensis 39 4 (10.3) afurculus 14 1 (7.1) enamena 42 27 (64.3) enamena 42 <td>0</td>	0	
	Neoromicia matroka	4	3 1 (33.3) 6 0 27 13 (48.1) 7 0 19 14 (73.7) 22 0 7 5 (71.4) 116 10 (8.6) 89 45 (50.6) 7 2 (28.6) 22 13 (59.1) 34 0 94 1 (1.1) 68 0 19 0 152 27 (17.8) 39 4 (10.3) 14 1 (7.1) 42 27 (64.3) 11 0 20 2 (10.0) 49 15 (30.6) 2 0 48 21 (43.8) 2 0 4 0 1 (100.0) 8 0 11 0 3 0	
Vespertilionidae (I) (n = 80)	Neoromicia robertsi	1	1 (100.0)	
(n – 80)	Pipistrellus / Neoromicia sp.	8	0	
	Pipistrellus hesperidus	11	0	
	Pipistrellus raceyi	3	0	
	Scotophilus marovaza	,	1 (100.0)	

(Emballonuridae), *Hipposideros commersoni* (Hipposideridae), *Miniopterus manavi* (Miniopteridae), *Chaerephon leucogaster* (Molossidae), *Rousettus madagascariensis* (Pteropodidae), and *Neoromicia robertsi* and *Scotophilus marovaza* (Vespertilionidae). All tested species within the Hipposideridae and Rhinonycteridae were found positive for *Leptospira*. Similarly, all but two *Miniopterus* spp. (*M. aelleni* and *M. gleni*) were found infected with *Leptospira*. Within the Molossidae, *Chaerephon* spp. and *Mops* spp. showed lower rates of infection than *Mormopterus jugularis* and *Otomops madagascariensis* (P-value < 0.01, Fisher's exact test). Noteworthy, *M. jugularis* was the only species sampled both in caves (n = 31) and synanthropic sites (n = 108). A Pearson's Chi-square test indicated that there was no-significant difference in infection rate of this species sampled in both types of habitat (P-value = 0.54).

We could successfully amplify and sequence at least one of the three bacterial markers (secY, adk and rrs2) for 120 out of the 203 RT-PCR-positive Leptospira samples.

Amplification failed at all three loci for 83 RT-PCR positive samples. Based on secY—
phylogeny (see below), all identified Leptospira clustered into the pathogenic clade and most of them (67.0%) were typed as L. borgpetersenii and L. borgpetersenii-related. Leptospira kirschneri was identified in 12.3% of genotyped individuals and the remaining sequences (20.5%) could not be assigned to any known Leptospira taxon.

Phylogeny of Leptospira

Amplification of *secY*, *adk* and *rrs2* loci was performed on all *Leptospira* positive samples and produced 73, 36 and 116 sequences of 482, 500 and 503-504 base pairs, respectively. All sequences were deposited in GenBank (see Supplementary Table 4). The number of polymorphic sites was higher in *secY* (38%) and *adk* (37%) than in *rrs2* (8%). Phylogenies of

Leptospira based on secY, adk and rrs2 markers are depicted in Figures 1, S1 and S2,
respectively. No concatenated phylogeny was produced since the ILD test did not validate the
congruence of topologies obtained with the different markers (P-value < 0.01). The sec Y-
based phylogeny displays seven well-supported pathogenic Leptospira clades (A to G)
infecting Malagasy bats (Fig. 1). Clade A corresponds to L. borgpetersenii and is composed
of sequences obtained only from Miniopterus spp. and Myotis goudoti. Bacterial sequences
obtained from Molossidae (Mormopterus jugularis and Otomops madagascariensis) and
Pteropodidae (Rousettus madagascariensis) taxa cluster in two distinct monophyletic clades C
and D, respectively, both being closely related to L. borgpetersenii clade A. Clade B includes
L. kirschneri haplotypes and, as for clade A, is composed only of Leptospira infecting
Miniopterus spp. and Myotis goudoti. Clade E is composed of haplotypes obtained from
Hipposideros commersoni and clades F and G are composed of haplotypes obtained from
Triaenops menamena. Interestingly, these three later clades do not cluster with any known
pathogenic Leptospira taxon, although clade G is embedded into a clade containing L.
noguchii, L. kirschneri and L. interrogans. Finally, a sequence from Neoromicia robertsi
clustered with a sequence obtained from H. commersoni.

Phylogenetic reconstruction with *adk* displayed comparable information to that obtained with *secY* despite a more limited number of sequences (see Supplementary Figure 1).

A greater number of sequences were obtained from *rrs2*, but the resulting phylogeny was poorly resolved (see Supplementary 2).

Genetic population structure of *Leptospira*

The AMOVA indicated that the genetic diversity of bat-borne Leptopsira was not dependent on geoclimatic parameters, specifically the distinct bioclimatic regions of Madagascar (F_{CT} =


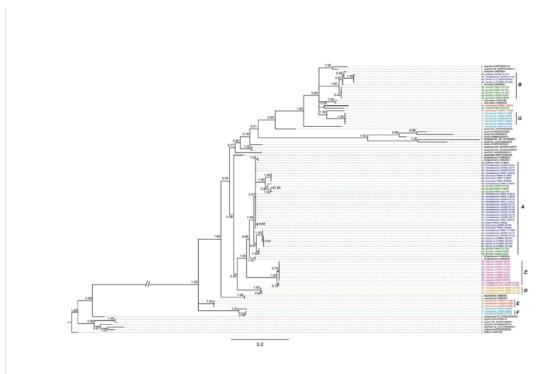


Fig. 1 Phylogenetic tree based on pathogenic Leptospira secY (482 bp) gene. The analysis was carried out using Bayesian Inference under the HKY+I substitution model. Nodal values correspond to posterior probabilities. The letters (A to G) designate the main well-supported Leptospira clades. Leptospira haplotypes are coloured according to host family (red: Hipposideridae, blue: Miniopteridae, purple: Molossidae, orange: Pteropodidae, light blue: Rhinonycteridae and green: Vespertilionidae). Names typed in black refer to Leptospira (L.) sequences accessible from GenBank (see Supplementary Table 1). Hi: Hipposideros, Mi: Miniopterus, Mo: Mormopterus, My: Myotis, Ne: Neoromicia, Ot: Otomops, Ro: Rousettus and Tr: Triaenops.

222x154mm (300 x 300 DPI)

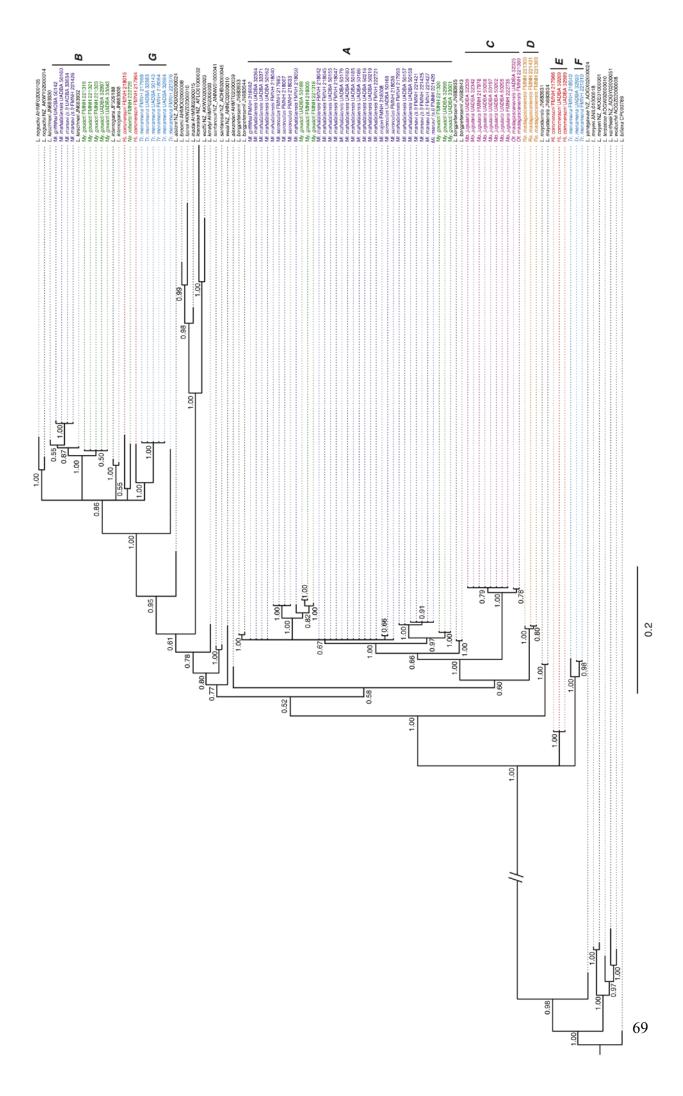

-0.02769, P-value = 0.63734) or the geographic location of sampling sites (F_{CT} = -0.08457, P-value = 0.67449) (Table 2). Moreover, bats of the same species and sampled at distant sites shared closely related bacterial haplotypes (Fig. 2). This aspect was observed with *Leptospira* spp. detected in *Myotis goudoti*, *Miniopterus* spp., *Hipposideros commersoni*, *Triaenops menamena*, *Otomops madagascariensis* and *Rousettus madagascariensis*. In keeping with this pattern, *Mormopterus jugularis* was infected with a unique *Leptospira* haplotype regardless of the roost site type (synanthropic or natural) and bioclimatic zone (dry, sub-arid, sub-humid or humid). In contrast, we detected that global leptospiral diversity was strongly associated with the host, as differences between host families accounted for 51.45% of the variation (F_{CT} = 0.51451, P-value < 0.001). The AMOVA test also indicated a high genetic variation (49.82%) within host species (Table 2), associated with the observation that certain bat species can harbour several distinct *Leptospira* lineages, as exemplified for *Myotis goudoti*, *Miniopterus* spp., *H. commersoni* and *T. menamena*. Finally, we found a significant positive correlation between host species richness at a given site and the associated *Leptospira* diversity (r^2 = 0.87, df = 12, P-value < 0.001) (Fig. 3).

Co-phylogeny

ParaFit and PACo did no support co-evolution between bats and their respective *Leptospira*based on *secY* (ParaFitGlobal = 4.5128, P-value = 0.09; m2 global value = 25.9503, P-value =
0.06) and *adk* datasets (ParaFitGlobal = 0.4922, P-value = 0.47; m2 global value = 16.5497,
P-value = 0.26). When *rrs2* data were used, ParaFit analysis was consistent with the absence
of global co-evolution between bats and *Leptospira* (ParaFitGlobal = 0.0249, P-value = 0.07),
while PACo analysis indicated a co-evolution pattern (m2 global value = 7.4856, P-value <
0.01).

Table 2. Analysis of molecular variance (AMOVA) based on Leptospira secY gene. In each analysis, a population is referred to all Leptospira sequences detected in a single bat species at a given sampling site.

Comparison	Source of variation	d.f.	Fixation indices (F)	ces (F)	P-value	% of variation
Bioclimatic regions	Among regions (n = 4)	3	$\Phi_{\rm CT} = -0.02769$	6927	0.63734	-2.77
	Among host species within regions	36	$\Phi_{SC}=0.43875$	875	< 0.001	45.09
	Within host species	33	$\Phi_{ST}=0.42321$	321	< 0.001	57.68
Sampling sites	Among sites $(n = 23)$	22	$\Phi_{\rm CT} = -0.08457$	3457	0.67449	-8.46
	Among host species within sites	17	$\Phi_{SC}=0.47232$	232	< 0.01	51.23
	Within host species	33	$\Phi_{\rm ST}=0.42769$	692	< 0.001	57.23
Host families	Among families $(n = 6)$	5	$\Phi_{\rm CT} = 0.51451$	451	< 0.001	51.45
	Among host species within families	34	$\Phi_{SC} = -0.02617$	2617	0.48680	-1.71
	Within host species	33	$\Phi_{ST}=0.50180$	180	< 0.001	49.82

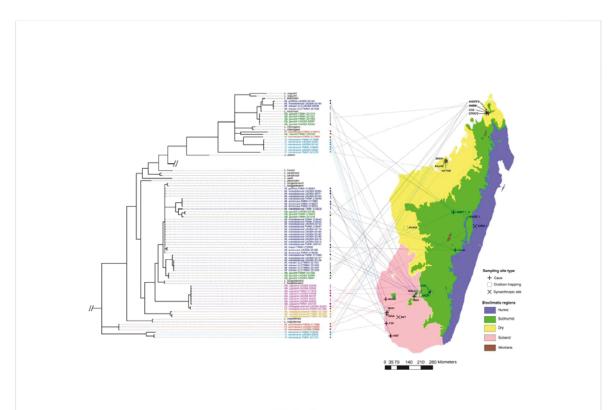
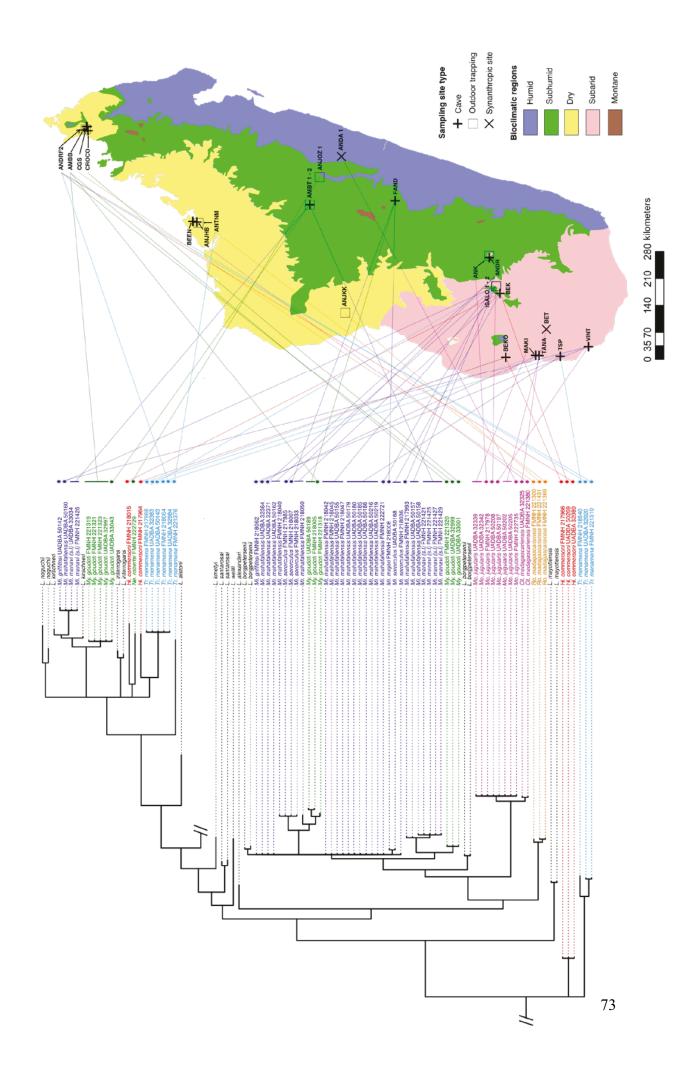


Fig. 2 Distribution of pathogenic Leptospira spp. in bats sampled in different sites and bioclimatic regions (Cornet 1974) of Madagascar. Leptospira phylogeny is based on secY sequences. For details on code colours and acronyms see Figure 1 and for sampling sites (example: BET, TSP, VINT...) see Supplementary Table 3. 217x147mm (300 x 300 DPI)



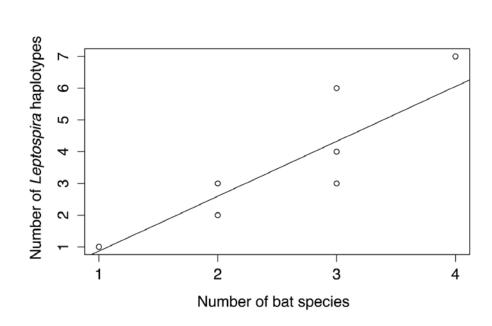


Fig. 3 Correlation between Leptospira haplotype diversity (based on the secY gene) and host species richness within sampling sites (r2 = 0.87, df = 12, P-value < 0.001, Pearson's R correlation test). At a given sampling site, the number of host corresponds to the number of bat species from which at least one secY sequence was obtained. $141 \times 114 \text{mm} (300 \times 300 \text{ DPI})$

Analyses of co-evolutionary scenarios

The CoRe-PA analysis was not performed on *adk* as branch lengths were notably different and did not allow length adjustment, or on *rrs2* because of the poor resolution of this marker (see Supplementary Figure 2). Based on the *secY* data set, the *Leptospira* and bat cophylogeny analysis using CoRe-PA produced 384 distinct co-evolutionary reconstructions. Fifteen solutions displayed the same quality value (0.108) and corresponded to the preferred reconstruction. All of the 15 reconstructions had the same event frequencies: seven cospeciation, 25 sorting, 11 duplication and seven host-switching events. For the remaining reconstructions, the quality value varied from 0.122 to 1.029. The randomized data sets showed more co-speciation events (8.21 on average) and a better quality value (0.040) than the original data set (0.108). Moreover, 69% of the randomized reconstructions showed more co-speciation events than did the original dataset. These results do not support co-phylogeny between bats and their associated *Leptospira*. Lastly, five of the seven detected host-switching events involved *Myotis goudoti* and three occurred between *Miniopterus* spp. and *Myotis goudoti* (Fig. 4).


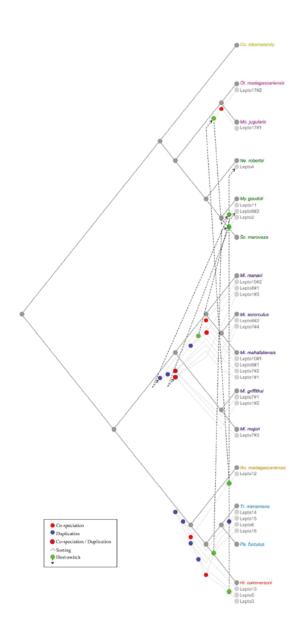


Fig. 4 Representation of the most parsimonious co-evolutionary scenario for Leptospira (light grey) and bat lineages (dark grey) proposed by CoRe-Pa. Leptospira and bat phylogenies were based on secY and cyt b, respectively. As for Leptospira lineages, 17 distinct groups were defined based on the secY phylogeny and numbered accordingly. A given Leptospira can be found in different bat species and is annotated as for example: Lepto8#1 in Miniopterus manavi and Lepto8#2 in Miniopterus sororculus. Each colour corresponds to a bat family (yellow: Emballonuridae, red: Hipposideridae, blue: Miniopteridae, purple: Molossidae, orange: Pteropodidae, light blue: Rhinonycteridae and green: Vespertilionidae). Co: Coleura, Hi: Hipposideros, Mi: Miniopterus, Mo: Mormopterus, My: Myotis, Ne: Neoromicia, Pa: Paratriaenops, Ot: Otomops, Ro: Rousettus, Sc: Scotophilus and Tr: Triaenops.

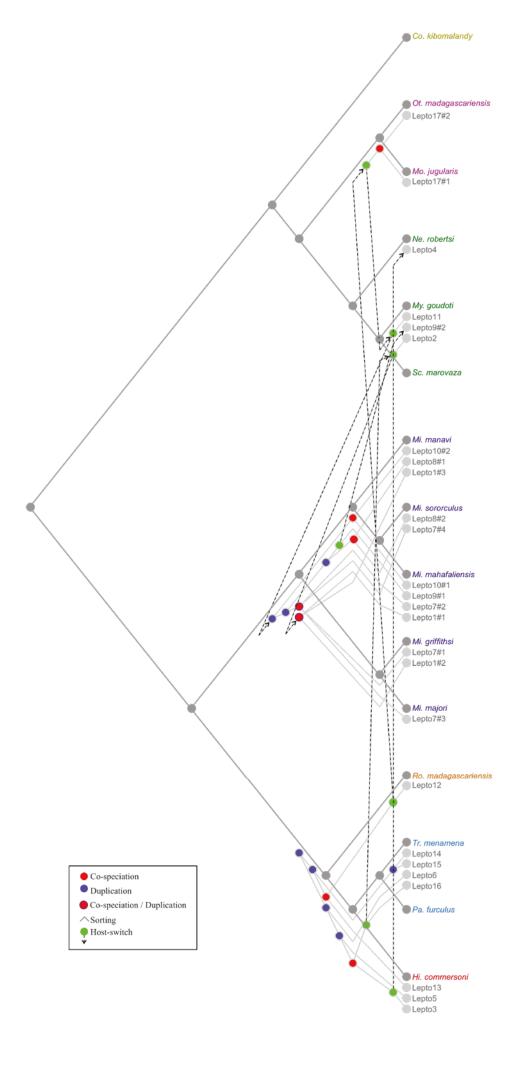

DISCUSSION

A high diversity of pathogenic Leptospira is detected in several Malagasy bat species Our study highlights that *Leptospira* infection is widespread in Malagasy bats with new documented cases of infection in species belonging to seven families. Interestingly, as previously reported from the New World tropics (Matthias et al. 2005), we detected considerable variation in leptospiral infection rates among different Malagasy bat species. Our data also showed either absence or low infection rates in the genera Chaerephon and Mops (Molossidae), whereas other members of this family, Mormopterus jugularis and Otomops madagascariensis, showed high infection rates. This may be associated with differences in roosting ecology: our sampled individuals of Chaerephon spp. and Mops spp. were predominantly from synanthropic roost sites, whereas M. jugularis and O. madagascariensis where at least in part from natural cave roost sites. We did not find significant differences in infection rates among M. jugularis sampled in natural as compared to synanthropic roost sites. The present study reveals a higher diversity of pathogenic Leptospira spp. in Malagasy bats than previously documented (Lagadec et al. 2012; Dietrich et al. 2014). Leptospira borgpetersenii has been already reported in Madagascar bats (Lagadec et al. 2012; Dietrich et al. 2014) and appear herein as a dominant Leptospira taxon. It is interesting to note that L. borgpetersenii and L. kirschneri (which is reported here for the first time in Malagasy bats) have been also reported in South American and African bats (Matthias et al. 2005; Ogawa et al. 2015). We also detected undescribed Leptospira lineages hosted notably by Hipposideros commersoni, Neoromicia robertsi, Rousettus madagascariensis and Triaenops menamena. Lastly, even though we failed to amplify and sequence the secY and adk genes of Leptospira infecting some bat species within our sample (Paratriaenops furculus, Coleura kibomalandy

and Scotophilus marovaza), the obtained rrs2 sequences were indicative of other potentially

undescribed bacterial lineages. The presence of divergent *Leptospira* lineages and/or the low bacterial loads could explain the PCR failures from certain *Leptospira*–positive bats. For example, we could not genotype *Leptospira* from *Miniopterus griveaudi* samples for which RT-PCR Cycle Threshold (CT) values were high $(40.0 \pm 1.19, n = 10)$. In contrast, we obtained *Leptospira* sequences from the other Miniopteridae species, which displayed lower CT values ranging from 29.7 ± 6.24 (n = 5) to 33.3 ± 5.19 (n = 2). Altogether, our work suggests that the actual bacterial diversity in Malagasy bats is likely even higher than documented herein.

Leptospira spp. display a strong host-specificity pattern

Although serological tools have indicated some specificity of *Leptospira* towards host reservoirs with certain serovars commonly associated to specific animals (Bharti et al. 2003), only a few studies have addressed the question of *Leptospira* host-specificity at the molecular level (Cameron et al. 2008; Cosson et al. 2014; Dietrich et al. 2014; Koizumi et al. 2015). Based on species-specific primers, Cameron et al. (2008) highlighted a *Leptospira* host-specificity pattern in pinniped populations with sea lions (*Eumetopias jubatus* and *Zalophus californianus*) infected only by *L. interrogans* and northern elephant seals (*Mirounga angustirostris*) infected only by *L. kirschneri*. Similarly, endemic Malagasy small terrestrial mammals and bats have been shown to be infected by distinct *Leptospira* lineages (Dietrich et al. 2014).

Using molecular approaches and Malagasy bats, which provide a powerful biological model of high levels of endemicity and a varied diversity of geographical distribution for host species, the present study looks deeper into patterns of *Leptospira* host-specificity. Our data indicate that *Leptospira* spp. display a high degree of host-specificity for Malagasy bats at

different taxonomic levels. Generally, each bat species harbours its own *Leptospira* lineage or lineages. For the Miniopteridae, the bacteria host-specificity pattern has to be considered at the level of host genus, as there is no evidence of specific *Leptospira* haplotypes (or clades) restricted to a given *Miniopterus* species. Overall, the host-specificity pattern together with the lack of geographical structure of *Leptospira* diversity indicate that (i) co-roosting bat species do not share the same *Leptospira* community (except in the case of *Miniopterus* in which different species within the genus can harbour the same *Leptospira* community) and (ii) the *Leptospira* diversity depends on the bat host species diversity at a given site (Fig. 3). Such bacteria host associations imply that the geographical distribution of a given *Leptospira* haplotype depends on the dispersal patterns of the host species. For instance, *Mormopterus jugularis* harbours a unique *Leptospira* haplotype across a broad area of the island, irrespective of the roost site type or bioclimatic zone. The maintenance of this unique haplotype could be also reinforced by the fact that *M. jugularis* is genetically panmictic across its distribution and indicating broad patterns of dispersal (Ratrimomanarivo et al. 2009).

Globally, analyses with secY and adk genes did not show evidence of a co-evolution signal between Malagasy bats and their respective Leptospira. Using the same global-fit methods employed herein (ParaFit and PACo), Lei and Olival (2014) conducted a similar study using previously published rrs2 sequences (26 sequences belonging to 20 bat species) and did not find evidence of co-evolution between bats and Leptospira. Here, with 116 rrs2 Leptospira sequences from 31 bat species, we come to a similar conclusion based on the ParaFit analyses while PACo analyses provide evidence of co-evolution. This result may be biased because of the poor resolution of the rrs2 tree and the presence of many related Leptospira in the same host. These findings underline that results provided by co-evolutionary analyses should be interpreted cautiously as they strongly depend on the resolution of the used

genetic marker, the chosen method and sample size.

The leptospiral diversity related to the ecology and the evolution history of bats

Based on the secY gene, the CoRe-PA analysis indicated that the Malagasy bat-Leptospira evolutionary history results from a combination of duplication, co-speciation, host-switching as well as numerous sorting events (Fig. 4). These events could be explained by the ecology of the hosts, as for example their roosting behaviour, particularly when species occur in sympatric or syntopic day roost sites. Such roosting behaviour could favour parasite transmission between co-roosting bat species (Hayman et al. 2013) and in turn favour hostswitching events. In the present study, this assumption was substantiated by three hostswitching events detected between Miniopterus spp. and Myotis goudoti. These species were found in 38% of the same cave roost sites with multiple host species. Moreover, Miniopterus spp. and Myotis goudoti, both bat taxa belonging to sister families (Miller-Butterworth et al. 2007) are known to occur syntopically in mixed day roost sites and in physical body contact with one another (Goodman 2011). This level of direct contact of M. goudoti with different species of Miniopterus might be a key element in the transmission of bacteria between nonsympatric Miniopterus. For instance, M. mahafaliensis, M. griffithsi and M. manavi share the same L. kirschneri haplotype (Fig. 1), although M. manavi is not living in sympatry with the other two Miniopterus spp., but in each case with Myotis goudoti. Thus, as this latter is a widespread species (Goodman and Ramasindrazana 2013), occurs in syntopy with different Miniopterus spp. and does not show very pronounced patterns of genetic variation (Weyeneth et al. 2010), we can hypothesize that Myotis plays a bridging role for Leptospira host-switch between non-sympatric Miniopterus spp.

The host-switches are not restricted to syntopic bat species (Miniopterus spp. and

Myotis goudoti) since such events were also detected between other sympatric (Molossidae – M. goudoti, Rousettus madagascariensis – Molossidae, Triaenops menamena – M. goudoti) and non-sympatric species (Hipposideros commersoni and Neoromicia robertsi) (Fig. 4 and see Supplementary Table 3). These findings underline that physical close contact is not a prerequisite for host-switching events and there are probably other means for horizontal transmission of Leptospira.

Beside ecological behaviour, parasite-host specificity may depend on the evolutionary and natural history traits of both parasites and hosts (Poulin and Keeney 2008). On Madagascar, the contemporary bat fauna is the result of at least 20 different colonization events from the mid-Miocene to the modern era and mainly from Africa (Samonds et al. 2013). In several cases, an adaptive radiation followed successful colonization by an ancestral population, as best illustrated by the genus *Miniopterus* whose initial divergence took place an estimated 4.5 Mya (Christidis et al. 2014). This relatively recent radiation and the syntopic behaviour displayed by several *Miniopterus* spp. can explain the absence of bacteria-host specificity at the species level within the genus. Whether the ancestral *Miniopterus* brought over different bacterial lineages from continental Africa or got infected following successful colonization of Madagascar by phylogenetically different bat groups may be addressed through a thorough investigation of *Miniopterus-Leptospira* associations in continental Africa.

Epidemiological implications

The tight host-specificity reported here between *Leptospira* and bat species may have broad implications in understanding global epidemiology of leptospirosis infection. Our study is based on the PCR detection of bacterial DNA in a pool of tissue biopsies including kidney.

Page 24 of 55

Although it cannot be ruled out that PCR positive animals were actually experiencing acute systemic infection, we propose that the high infection rates reported herein is a signature of the carrier state of the positive animals, i.e. their capacity to maintain a bacterial biofilm in the proximal convoluted tubule of the kidney with bacteria being excreted upon urination. The bacteria host-specificity pattern reported in our study might reflect the selection for an appropriate bacterial genotype able to develop and be maintained in the host. Previous studies hypothesized that biofilms formed by *Leptospira* play an important role in the maintenance of bacteria in the kidneys of reservoir hosts (Ristow et al. 2008; Matsui et al. 2015). Further, it can be suggested that some specific interactions between the tubular epithelial cell and the Leptospira bacterial cell wall might trigger the first steps of the biofilm formation and act as the selection force. As mammals can be infected by different pathogenic Leptospira, the genotype of the selected bacteria, which defines the carrier state of the specific host, does not preclude multiple infections of the same individual by different Leptospira species, and that at a fine level are controlled by the immune responses of the host. Serological analyses are warranted to provide information on the actual exposure of bats to leptospiral infection and assess the decoupling between the carrier state, defining strict host specificity and the infection state, which is likely less restricted with regard to infecting genotypes.

CONCLUSIONS

The data presented herein help to complete available information on *Leptospira* infection and diversity in bats from different regions of the world, in this case specifically from Madagascar. Our results highlight a notable level of specificity of *Leptospira* towards their bat hosts, strong enough as to allow predicting the identity of the host for any of the *Leptospira* taxa described herein. In other words, "tell me who you walk with and I will tell

you who you are". The present study should stimulate molecular characterizations of
pathogenic Leptospira diversity and structuration within different animal reservoirs in other
geographical regions. Such approaches will provide insightful data regarding the ecology of
Leptospira and the medical and/or veterinary importance of local animal reservoirs.

DATA ACCESSIBILITY

Accession numbers: All cyt b sequences obtained from bats in the frame of the present work were deposited on GenBank under accession numbers KR606331 – KR606336 (see Supplementary Table 2). Leptospira sequences were deposited on GenBank under accession numbers KP822572 - KP822607, KP822608 - KP822680, KP822681 - KP822796, for adk, secY, rrs2 genes, respectively (see Supplementary Table 4).

Sequences alignment: Sequences alignment of each gene is available on Dryad (doi: XXXX)

SUPPLEMENTARY DATA

Supplementary data is available at FEMSEC online.

FUNDING

This work was supported by European Regional Development Funds ERDF-POCT; Réunion projects [FSOI #31189 and LeptOI #32913]. Y.G. was supported by a scholarship from the French Ministry of Higher Education and Research. M.D. and B.R. were supported by postdoctoral fellowships funded by "RUN-Emerge: A Regpot European project funded by European Commission under FP7 program". B.R. was also supported by The "Fonds de Coopération Régionale" of the Préfecture de La Réunion and a grant from the Dr. Ralph and Marian Falk Medical Research Trust to The Field Museum of Natural History, Chicago. N.

520	W. was funded by the German Research Foundation (DFG) [Proj. No. MI439/14-1].
521	
522	Conflict of interest. None declared.
523	
524	ACKNOWLEDGMENTS
525	We are grateful to Département de Biologie Animale, Université d'Antananarivo; Ministère
526	de l'Environnement et des Forêts, Direction du Système des Aires Protégées, Direction
527	Générale de l'Environnement et des Forêts; and Madagascar National Parks (Madagascar) for
528	kindly providing research and export permits (N°194/12/MEF/SG/DGF/DCB.SAP/SCB,
529	N°032/12/MEF/SG/DGF/DCB.SAP/SCBSE, N°283/11/MEF/SG/DGF/DCB.SAP/SCB,
530	N°067/12/MEF/SG/DGF/DCB.SAP/SCBSE, N°077/12/MEF/SG/DGF/DCB.SAP/SCBSE).
531	Samples from Pteropus rufus were exported to La Réunion (CRVOI) with a CITES permit
532	provided by the Malagasy national authority (permit # 243C-EA06/MG12). We acknowledge
533	Jean-Michel Héraud and other members of the Institut Pasteur de Madagascar for facilitating
534	sample storage and exportation. We thank Julien Mélade and David Wilkinson for their help
535	in the laboratory. Phylogenies were performed on the University of Reunion Island
536	supercomputer facility.
537	
538	

	539	REFERENCES
	540	Adler B, de la Peña Moctezuma A. Leptospira and leptospirosis. Vet Microbiol
	541	2010; 140 :287–96.
0	542	
1	543	Agnarsson I, Zambrana-Torrelio CM, Flores-Saldana NP, et al. A time-calibrated species-
3 4	544	level phylogeny of bats (Chiroptera, Mammalia). PLoS Curr 2011;3,RRN1212.
5 6	545	Ahmed A, Grobusch MP, Klaster PR, et al. Molecular approaches in the detection and
2 3 4 5 6 7 8	546	characterization of Leptospira. J Bacteriol Parasitol 2012;3,133.
0	547	Ahmed N, Devi SM, Valverde M de los Á, et al. Multilocus sequence typing method for
1 2	548	identification and genotypic classification of pathogenic Leptospira species. Ann Clin
2 3 4 5 6 7	549	Microbiol Antimicrob 2006;5:28.
6	550	Balbuena JA, Míguez-Lozano R, Blasco-Costa I. PACo: a novel procrustes application to
7 8 9	551	cophylogenetic analysis. PLoS One 2013;8:e61048.
0	552	Bharti AR, Nally JE, Ricaldi JN, et al. Leptospirosis: a zoonotic disease of global importance
1 2 3 4 5 6 7	553	Lancet Infect Dis 2003;3:757–71.
4 5	554	Bourhy P, Collet L, Brisse S, et al. Leptospira mayottensis sp. nov., a pathogenic species of
6	555	the genus Leptospira isolated from humans. Int J Syst Evol Microbiol 2014;64:4061-
7 8 9	556	7.
0 1	557	Bunnell JE, Hice CL, Watts DM, et al. Detection of pathogenic Leptospira spp. infections
2	558	among mammals captured in the Peruvian Amazon basin region. Am J Trop Med Hyg
3 4 5	559	2000; 63 :255–8.
6 7	560	Calisher CH, Childs JE, Field HE, et al. Bats: important reservoir hosts of emerging viruses.
8 9	561	Clin Microbiol Rev 2006;19:531–45.
0 1	562	Cameron CE, Zuerner RL, Raverty S, et al. Detection of pathogenic Leptospira bacteria in
2 3	563	pinniped populations via PCR and identification of a source of transmission for
4 5 6 7	564	zoonotic leptospirosis in the marine environment. J Clin Microbiol 2008;46:1728–33
6 7	565	Charleston MA. TreeMap 3b. Available from http://sites.google.com/site/cophylogeny, 2011

566	Chomel BB, Stuckey MJ, Boulouis H-J, et al. Bat-related zoonoses. In: Sing A (ed.).
567	Zoonoses - infections affecting humans and animals. Netherlands: Springer, 2015,
568	697–714.
569	Christidis L, Goodman SM, Naughton K, et al. Insights into the evolution of a cryptic
570	radiation of bats: dispersal and ecological radiation of Malagasy Miniopterus
571	(Chiroptera: Miniopteridae). PLoS One 2014;9:e92440.
572	Cornet A. Essai de cartographie bioclimatique à Madagascar. Not Explic ORSTOM
573	1974; 55 :1–28.
574	Cosson J-F, Picardeau M, Mielcarek M, et al. Epidemiology of Leptospira transmitted by
575	rodents in Southeast Asia. PLoS Negl Trop Dis 2014;8:e2902.
576	Cox TE, Smythe LD, Leung LK-P. Flying foxes as carriers of pathogenic <i>Leptospira</i> species.
577	J Wildl Dis 2005; 41 :753–7.
578	Desvars A, Naze F, Vourc'h G et al. Similarities in Leptospira serogroup and species
579	distribution in animals and humans in the Indian Ocean island of Mayotte. Am J Trop
580	Med Hyg 2012; 87 :134–40.
581	Dietrich M, Wilkinson DA, Soarimalala V, et al. Diversification of an emerging pathogen in a
582	biodiversity hotspot: Leptospira in endemic small mammals of Madagascar. Mol Ecol
583	2014; 23 ,2783-96.
584	Dixon P. VEGAN, a package of R functions for community ecology. J Veg Sci 2003;14:927-
585	30.
586	Drummond AJ, Ashton B, Buxton S, et al. Geneouis, version 5.4. Available from
587	http://www.geneouis.com. 2011.
588	Duron O, Schneppat UE, Berthomieu A, et al. Origin, acquisition and diversification of
589	heritable bacterial endosymbionts in louse flies and bat flies. Mol Ecol 2014;23:2105-
590	17.
591	Emanuel ML, Mackerras IM, Smith DJW. The epidemiology of leptospirosis in North

592	Queensland: I. General survey of animal hosts. Epidemiol Infect 1964;62:451-84.
593	Excoffier L, Lischer HEL. Arlequin suite ver 3.5: a new series of programs to perform
594	population genetics analyses under Linux and Windows. Mol Ecol Resour
595	2010; 10 :564–7.
596	Fennestad KL, Borg-Petersen C. Leptospirosis in Danish wild mammals. J Wildl Dis
597	1972; 8 :343–51.
598	Franco Bessa TÁ, Spichler A, Berardis Chapola ÉG, et al. The contribution of bats to
599	leptospirosis transmission in São Paulo city, Brazil. Am J Trop Med Hyg
600	2010; 82 :315–7.
601	Goodman SM. Les chauves-souris de Madagascar. Antananarivo, Madagascar : Association
602	Vahatra, 2011.
603	Goodman SM, Rakotondramanana CF, Ramasindrazana B, et al. An integrative approach to
604	characterize Malagasy bats of the subfamily Vespertilioninae Gray, 1821, with the
605	description of a new species of Hypsugo. Zool J Linn Soc 2015a;173:988-1018.
606	Goodman SM, Ramasindrazana B, Naughton KM, et al. Description of a new species of the
607	Miniopterus aelleni group (Chiroptera: Miniopteridae) from upland areas of central
608	and northern Madagascar. Zootaxa 2015b;3936:538-58.
609	Goodman SM, Ramasindrazana B. Bats or order Chiroptera. In: Goodman SM and
610	Raherilalao MJ (eds.). Atlas of Selected Land Vertebrates of Madagascar.
611	Antananarivo, Madagascar: Association Vahatra, 2013, 169–209.
612	Hayman DTS, Bowen RA, Cryan PM, et al. Ecology of zoonotic infectious diseases in bats:
613	current knowledge and future directions. Zoonoses Public Health 2013;60:2-21.
614	Irwin DM, Kocher TD, Wilson AC. Evolution of the cytochrome b gene of mammals. J Mol
615	Evol 1991; 32 :128–44.
616	Koizumi N, Izumiya H, Mu J-J, et al. Multiple-locus variable-number tandem repeat analysis
617	of Leptospira interrogans and Leptospira borgpetersenii isolated from small feral and

618	wild mammals in East Asia. Infect Genet Evol 2015, DOI:
619	10.1016/j.meegid.2015.08.013.
620	Kunz TH, Braun de Torrez E, Bauer D, et al. Ecosystem services provided by bats. Ann N Y
621	Acad Sci 2011; 1223 :1–38.
622	Lagadec E, Gomard Y, Guernier V, et al. Pathogenic Leptospira spp. in bats, Madagascar and
623	Union of the Comoros. Emerg Infect Dis 2012;18:1696–8.
624	Legendre P, Desdevises Y, Bazin E. A statistical test for host-parasite coevolution. Syst Biol
625	2002; 51 :217–34.
626	Lehmann JS, Matthias MA, Vinetz JM, et al. Leptospiral pathogenomics. Pathogens
627	2014;3:280–308.
628	Lei BR, Olival KJ. Contrasting patterns in mammal-bacteria coevolution: Bartonella and
629	Leptospira in bats and rodents. PLoS Negl Trop Dis 2014;8:e2738.
630	Levett PN. Leptospirosis. Clin Microbiol Rev 2001;14:296-326.
631	Librado P, Rozas J. DnaSP v.5: a software for comprehensive analysis of DNA polymorphism
632	data. <i>Bioinformatics</i> 2009; 25 :1451–2.
633	Matsui M, Roche L, Soupé-Gilbert M-E, et al. Experimental hamster infection with a strain of
634	Leptospira borgpetersenii Ballum isolated from a reservoir mouse in New Caledonia.
635	Am J Trop Med Hyg 2015; 92 ,982-5.
636	Matthias MA, Díaz MM, Campos KJ, et al. Diversity of bat-associated Leptospira in the
637	Peruvian Amazon inferred by Bayesian phylogenetic analysis of 16S ribosomal DNA
638	sequences. Am J Trop Med Hyg 2005;73:964-74.
639	Merkle D, Middendorf M, Wieseke N. A parameter-adaptive dynamic programming approach
640	for inferring cophylogenies. BMC Bioinformatics 2010;11:S60.
641	Mgode GF, Mbugi HA, Mhamphi GG, et al. Seroprevalence of Leptospira infection in bats
642	roosting in human settlements in Morogoro municipality in Tanzania. Tanzan J Health
643	Res 2014;16, DOI: 10.4314/thrb.v16i1.

Figure legends

Fig. 1 Phylogenetic tree based on pathogenic *Leptospira secY* (482 bp) gene. The analysis was carried out using Bayesian Inference under the HKY+I substitution model. Nodal values correspond to posterior probabilities. The letters (A to G) designate the main well-supported *Leptospira* clades. *Leptospira* haplotypes are coloured according to host family (red: Hipposideridae, blue: Miniopteridae, purple: Molossidae, orange: Pteropodidae, light blue: Rhinonycteridae and green: Vespertilionidae). Names typed in black refer to *Leptospira* (*L*.) sequences accessible from GenBank (see Supplementary Table 1). *Hi: Hipposideros, Mi: Miniopterus, Mo: Mormopterus, My: Myotis, Ne: Neoromicia, Ot: Otomops, Ro: Rousettus* and *Tr: Triaenops*.

Fig. 2 Distribution of pathogenic *Leptospira* spp. in bats sampled in different sites and bioclimatic regions (Cornet 1974) of Madagascar. *Leptospira* phylogeny is based on *secY* sequences. For details on code colours and acronyms see Figure 1 and for sampling sites (example: BET, TSP, VINT...) see Supplementary Table 3.

Fig. 3 Correlation between *Leptospira* haplotype diversity (based on the secY gene) and host species richness within sampling sites ($r^2 = 0.87$, df = 12, P-value < 0.001, Pearson's R correlation test). At a given sampling site, the number of host corresponds to the number of bat species from which at least one secY sequence was obtained.

Fig. 4 Representation of the most parsimonious co-evolutionary scenario for *Leptospira* (light grey) and bat lineages (dark grey) proposed by CoRe-Pa. *Leptospira* and bat phylogenies were based on *secY* and *cyt b*, respectively. As for *Leptospira* lineages, 17 distinct groups were defined based on the *secY* phylogeny and numbered accordingly. A given *Leptospira* can be found in different bat species and is annotated as for example: Lepto8#1 in *Miniopterus manavi* and Lepto8#2 in *Miniopterus sororculus*. Each colour corresponds to a bat family (yellow: Emballonuridae, red: Hipposideridae, blue: Miniopteridae, purple: Molossidae, orange: Pteropodidae, light blue: Rhinonycteridae and green: Vespertilionidae). *Co: Coleura, Hi: Hipposideros, Mi: Miniopterus, Mo: Mormopterus, My: Myotis, Ne: Neoromicia, Pa: Paratriaenops, Ot: Otomops, Ro: Rousettus, Sc: Scotophilus* and *Tr*: *Triaenops*.

Supplementary Table 1. Details on Leptospira sequences from GenBank used in the present study. NA: not available or not used in the present

2 study.

Site / Country	China	Pingchang (China)	NA	Mayotte (France)	Mayotte (France)	Mayotte (France)	Mayotte (France)	Peru	Peru	Peru	Peru	Denmark	Australia	Peru	USA	Mayotte (France)	Thailand
Isolation source	Homo sapiens	Frog	NA	Homo sapiens	Homo sapiens	Homo sapiens	Homo sapiens	Sturnira lilium	Sturnira tildae	Desmodus rotundus	Carollia perspicillata	Homo sapiens	Sus scrofa	Uroderma bilobatum	Homo sapiens	Homo sapiens	NA
rrs2	AY631880	DQ991480.1	NR_102883	JN683865	JN683871	JN683876	JN683875	AY995713	AY995714	AY995715	AY995716	AHMO02000008	AY631885	AY995712	AHMM02000015	JN683870	JF509216
adk	NA	NA	CP000786	JN683882	JN683888	JN683893	JN683892	NA	NA	NA	NA	AHMO02000008	AKWZ02000010	NA	AHMM02000015	JN683887	JF509328
secY	AHMT02000039	NZ_AOHD02000041	CP000786	JN683933	JN683939	JN683944	JN683943	NA	NA	NA	NA	AHMO02000008	AKWZ02000010	NA	AHMM02000015	JN683938	JF509188
Leptospira species	Leptospira alexanderi	Leptospira alstoni	Leptospira biflexa	Leptospira borgpetersenii	Leptospira broomii	Leptospira fainei	Leptospira fainei	Leptospira inadai	Leptospira interrogans	Leptospira interrogans							

Peru	Peru	Peru	Peru	Peru	Madagascar	Madagascar	Madagascar	Comoros	Comoros	Comoros	Madagascar	China	Netherlands	Laos	USA	Thailand	Brazil
Lonchophylla thomasi	Uroderma bilobatum	Glossophaga soricina	Artibeus obscurus	Rhinophylla pumilio	Otomops madagascariensis	Miniopterus mahafaliensis	Triaenops menamena	Rousettus obliviosus	Rousettus obliviosus	Miniopterus griveaudi	Myotis goudoti	NA	Isolated from water	Homo sapiens	NA	Homo sapiens	Isolated from water
AY995724	AY995725	AY995726	AY995727	AY995728	JQ288729	JQ288730	JQ288731	JQ288732	JQ288733	JQ288734	JQ302791	AY631888	AY631897	JQ906670	Z21638	EF025496	AY631882
NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	AOGW02000010	NZ_AOGY02000051	AFLV02000058	AOGZ02000008	NZ_AKWX02000023	NA
NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	AOGW02000010	NZ_AOGY02000051	NZ_AHNC02000010	AOGZ02000008	NZ_AKWX02000023	NZ_AOGX02000024
Leptospira sp.	Leptospira sp.	Leptospira sp.	Leptospira sp.	Leptospira sp.	Leptospira sp.	Leptospira sp.	Leptospira sp.	Leptospira sp.	Leptospira sp.	Leptospira sp.	Leptospira sp.	Leptospira terpstrae	Leptospira vanthielii	Leptospira weilii	Leptospira wolbachii	Leptospira wolffii	Leptospira yanagawae

- 4 Supplementary Table 2. GenBank accession number of Cytochrome b (cyt b) sequences
- 5 from bat species used in this study, the asterisk indicates the sequences of cyt b generated in
- 6 this study. Asterisks indicate the sequences produced in the present study.

Bat family	Bat species	Cytochrome b GenBank accesion number
Emballonuridae	Coleura kibomalandy	JQ710748
Hipposideridae	Hipposideros commersoni	KR606333 *
Miniopteridae	Miniopterus griffithsi	JF440240
	Miniopterus mahafaliensis	FJ383166
	Miniopterus majori	HQ619939
	Miniopterus manavi	HQ619934
	Miniopterus sororculus	JF440282
Molossidae	Mormopterus jugularis	KR606332 *
	Otomops madagascariensis	KR606335 *
Rhinonycteridae	Paratriaenops furculus	KR606331 *
	Triaenops menamena	KR606334
Pteropodidae	Rousettus madagascariensis	GU228727
Vespertilionidae	Myotis goudoti	GU116769
	Neoromicia robertsi	KR606336 *
	Scotophilus marovaza	EU750943

- Supplementary Table 3. Details of sampling sites: locality code, province, description, type
- of site and number of specimens investigated at each site. (See Supplementary Table 3 in
- Excel)

Supplementary Table 4. Details on Leptospira sequences produced used in this study; GenBank accession number for three genes: secY, adk, 22

and rrs2; information on the host: museum number, bat species and family and locality of sampling. For locality details see Supplementary Table 23

24 3. NA: not available.

Bat family	Bat species	Collection date	Collection date Museum Number	Locality	Leptospira isolate	GenBa of <i>I</i>	GenBank accesion number of <i>Leptospira</i> marker	ımber ker
						secY	adk	rrs2
Emballonuridae	Coleura kibomalandy	17/09/12	FMNH 221311	CROCO	580MG	NA	NA	KP822681
Hipposideridae	Hipposideros commersoni	10/02/12	FMNH 217964	BEKO	43MG	KP822608	KP822572	KP822682
	Hipposideros commersoni	10/02/12	FMNH 217965	BEKO	44MG	NA	NA	KP822683
	Hipposideros commersoni	10/02/12	FMNH 217966	ВЕКО	45MG	KP822609	KP822573	KP822684
	Hipposideros commersoni	10/02/12	UADBA 32377	ВЕКО	46MG	NA	NA	KP822685
	Hipposideros commersoni	16/03/12	UADBA 50269	BEK	792MG	KP822610	KP822574	KP822686
	Hipposideros commersoni	16/03/12	FMNH 218015	BEK	794MG	KP822611	NA	KP822687
	Hipposideros commersoni	17/03/12	FMNH 218016	BEK	800MG	NA	NA	KP822688
	Hipposideros commersoni	17/03/12	FMNH 218018	BEK	801MG	NA	NA	KP822689
	Hipposideros commersoni	15/09/12	UADBA 32989	ANDRF2	562MG	KP822612	KP822575	KP822690
	Hipposideros commersoni	12/02/12	UADBA 32919	TANA	92MG	NA	NA	KP822757
Miniopteridae	Miniopterus manavi sensu lato	20/09/12	UADBA 33034	AMBT	9MZ09	KP822622	KP822578	KP822711
	Miniopterus manavi sensu lato	20/09/12	UADBA 33035	AMBT	9W809	NA	NA	KP822712
	Miniopterus manavi sensu lato	20/09/12	UADBA 33037	AMBT	610MG	NA	NA	KP822713
	Miniopterus manavi sensu lato	20/09/12	FMNH 221421	AMBT	615MG	KP822623	NA	KP822714


Miniopterus manavi sensu lato	20/09/12	FMNH 221425	AMBT	52MG	KP822624	NA	KP822715
Miniopterus manavi sensu lato	20/09/12	FMNH 221426	AMBT	616MG	KP822625	KP822579	KP822716
Miniopterus manavi sensu lato	20/09/12	FMNH 221427	AMBT	968MG	KP822626	KP822580	KP822717
Miniopterus manavi sensu lato	20/09/12	FMNH 221429	AMBT	53MG	KP822627	NA	KP822718
Miniopterus griffithsi	24/04/12	FMNH 218061	VINT	170MG	NA	KP822581	KP822719
Miniopterus griffithsi	24/04/12	FMNH 218062	VINT	174MG	KP822628	NA	KP822720
Miniopterus griffithsi	24/04/12	UADBA 50142	VINT	183MG	KP822629	NA	KP822721
Miniopterus mahafaliensis	10/02/12	FMNH 217957	BEKO	36MG	NA	KP822582	KP822722
Miniopterus mahafaliensis	12/02/12	UADBA 32355	AMB	76MG	NA	NA	KP822723
Miniopterus mahafaliensis	12/02/12	UADBA 32364	TANA	99MG	KP822630	KP822583	KP822724
Miniopterus mahafaliensis	15/02/12	FMNH 217988	ANDR	118MG	NA	NA	KP822725
Miniopterus mahafaliensis	15/02/12	UADBA 32371	ANDR	50MG	KP822631	NA	KP822726
Miniopterus mahafaliensis	15/02/12	FMNH 217990	ANDR	120MG	NA	NA	KP822727
Miniopterus mahafaliensis	15/02/12	FMNH 217992	ANDR	122MG	NA	NA	KP822728
Miniopterus mahafaliensis	15/02/12	FMNH 217993	ANDR	123MG	KP822632	KP822584	KP822729
Miniopterus mahafaliensis	14/03/12	UADBA 50162	ISAL01	741MG	KP822633	NA	KP822730
Miniopterus mahafaliensis	14/03/12	FMNH 218040	ISAL01	742MG	KP822634	NA	NA
Miniopterus mahafaliensis	14/03/12	FMNH 218042	ISALO1	743MG	KP822635	NA	KP822731
Miniopterus mahafaliensis	14/03/12	FMNH 218045	ISAL01	749MG	KP822636	KP822585	KP822732
Miniopterus mahafaliensis	14/03/12	UADBA 50155	ISAL01	750MG	KP822637	NA	KP822733
Miniopterus mahafaliensis	14/03/12	UADBA 50157	ISAL01	753MG	KP822638	KP822586	KP822734
Miniopterus mahafaliensis	14/03/12	UADBA 50158	ISALO1	950MG	KP822639	KP822587	KP822735

2 CGS 532MG 1 ANJKK 632MG 9 BEKO 49MG 8 BEKO 48MG 3 TANA 95MG 3 ISALO1 733MG 7 TSP 133MG 8 TSP 134MG	FMNH 221302 FMNH 217969 FMNH 217968 UADBA 32383 UADBA 50147 UADBA 50147 UADBA 50147 UADBA 50148 FMNH 218540 FMNH 218058 UADBA 50331		14/09/12 06/11/12 10/02/12 12/02/12 14/03/12 21/04/12 21/04/12 21/04/12 23/04/12
ANJKK BEKO BEKO TANA ISALOI TSP TSP	1221431 1217969 1217968 1A 32383 1A 50143 1A 50147 1A 50148 1A 50148 1A 50148 1A 50148	FMNH FMNH CADB CADB CADB CADB CADB CADB CADB CADB	
BEKO BEKO TANA ISALO1 TSP TSP	217969 217968 32383 50147 50147 50148 218540 21855 50331	FMNH: UADBA UADBA UADBA UADBA FMNH: FMNH: TANH: TA	
BEKO TANA ISALO1 TSP TSP	217968 32383 50143 50147 50148 50148 501858 50331	EMNH: UADBA UADBA UADBA EMNH: EMNH: UADBA	
TANA ISALOI TSP TSP	50143 50147 50148 50148 50148 518540 51858 50331	UADBA UADBA UADBA FMNH: FMNH: UADBA	
ISALO1 TSP TSP	A 50143 A 50147 A 50148 218540 218058 A 50331	UADBA UADBA UADBA FMNH FMNH UADBA	
TSP	A 50147 A 50148 218540 218058 A 50331	UADB, UADB, FMNH FMNH UADB,	
TSP	A 50148 218540 218058 A 50331	UADB/ FMNH FMNH UADB/	
	218540 218058 \ 50331	FMNH FMNH UADBA	
0 TSP 138MG	218058	FMNH	
8 TSP 141MG	50331	UADBA	
1 ANDRO 157MG			
5 ANDRO 161MG	50335	UADBA 50335	23/04/12 UADBA
7 VINT 176MG	50337	UADBA 50337	24/04/12 UADBA
4 VINT 177MG	18064	FMNH 218064	24/04/12 FMNH 2
5 VINT 178MG	18065	FMNH 218065	24/04/12 FMNH 2
0 VINT 184MG	18070	FMNH 218070	24/04/12 FMNH 2
1 VINT 185MG	18071	FMNH 218071	24/04/12 FMNH 2
6 ANTNM 460MG	21376	FMNH 221376	09/09/12 FMNH 2
7 ANTNM 461MG	21377	FMNH 221377	09/09/12 FMNH 2
0 BEEN 483MG	32920	UADBA 32920	10/09/12 UADBA
4 ANDRF2 566MG	UADBA 32984	UADB/	15/09/12 UADB/

Supplementary figure legends


Supplementary Figure 1. Phylogenetic tree based on the *adk* (435 bp) of pathogenic *Leptospira* spp. from Malagasy bat species. The analysis was carried out using Bayesian Inference under the HKY+I+G substitution model. Nodal supports values correspond to posterior probabilities. The detected *Leptospira spp*. are coloured according to the family of bats host species (red: Hipposideridae, blue: Miniopteridae, purple: Molossidae, orange: Pteropodidae, light—blue: Rhinonycteridae and green: Vespertilionidae). Names typed in black refer to *Leptospira* (*L*.) sequences accessible from GenBank (see Supplementary Table 1). Stars indicate *Leptospira* sequences, which do not group within the same position as previously described in *secY* phylogeny. *Hi*: *Hipposideros*, *Mi*: *Miniopterus*, *Mo*: *Mormopterus*, *My*: *Myotis*, *Ot*: *Otomops*, *Ro*: *Rousettus* and *Tr*: *Triaenops*.


Supplementary Figure 2. Phylogeny based on *Leptospira* spp. *rrs2* sequences (456 bp) from Malagasy bat species. The analysis was carried out using Bayesian Inference under the K2P+I+G substitution model. Nodal supports values correspond to posterior probabilities. The detected *Leptospira spp.* are coloured according to the family of bats host species (yellow: Emballonuridae, red: Hipposideridae, blue: Miniopteridae, purple: Molossidae, orange: Pteropodidae, light–blue: Rhinonycteridae and green: Vespertilionidae). Names typed in black refer to *Leptospira* (*L.*) sequences accessible from GenBank (see Supplementary Table 1). *Co: Coleura, Hi: Hipposideros, Mi: Miniopterus, Mo: Mormopterus, My: Myotis, Ne: Neoromicia, Pa: Paratriaenops, Ot: Otomops, Ro: Rousettus, Sc: Scotophilus and Tr: Triaenops.*

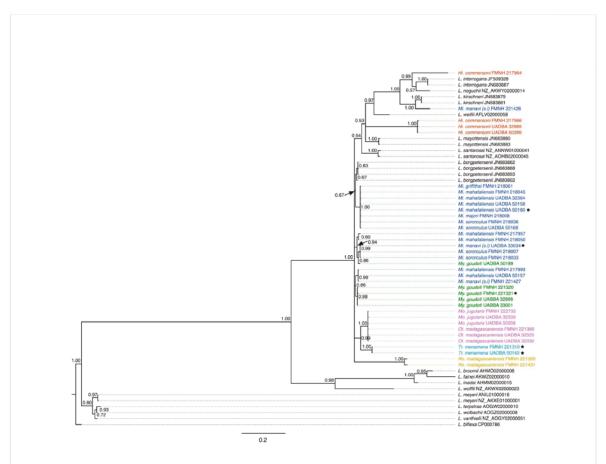


Supplementary Figure 1. Phylogenetic tree based on the adk (435 bp) of pathogenic Leptospira spp. from Malagasy bat species. The analysis was carried out using Bayesian Inference under the HKY+I+G substitution model. Nodal supports values correspond to posterior probabilities. The detected Leptospira spp. are coloured according to the family of bats host species (red: Hipposideridae, blue: Miniopteridae, purple: Molossidae, orange: Pteropodidae, light-blue: Rhinonycteridae and green: Vespertilionidae). Names typed in black refer to Leptospira (L.) sequences accessible from GenBank (see Supplementary Table 1). Stars indicate Leptospira sequences, which do not group within the same position as previously described in secY phylogeny. Hi: Hipposideros, Mi: Miniopterus, Mo: Mormopterus, My: Myotis, Ot: Otomops, Ro: Rousettus and Tr: Triaenops.

228x183mm (300 x 300 DPI)

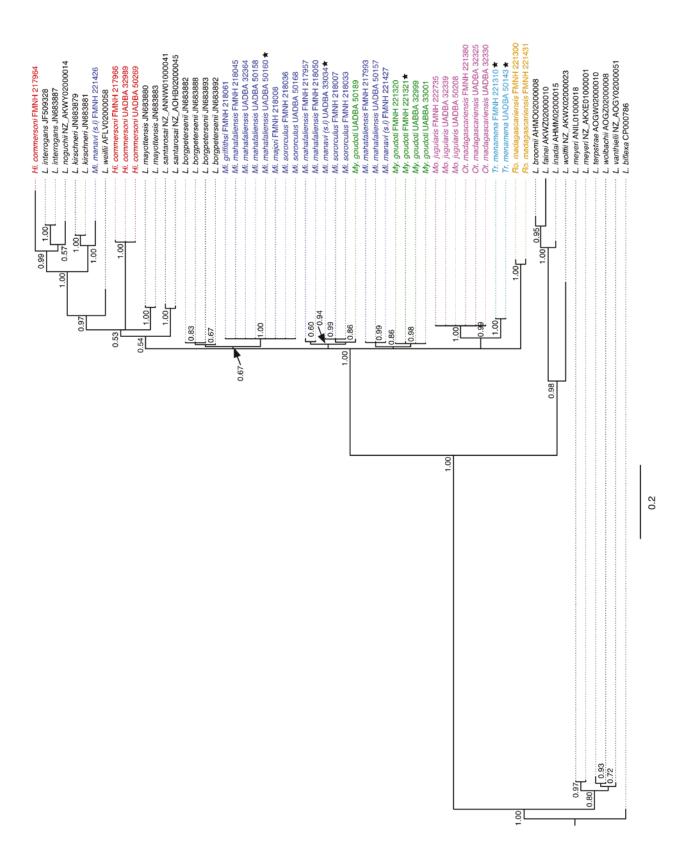

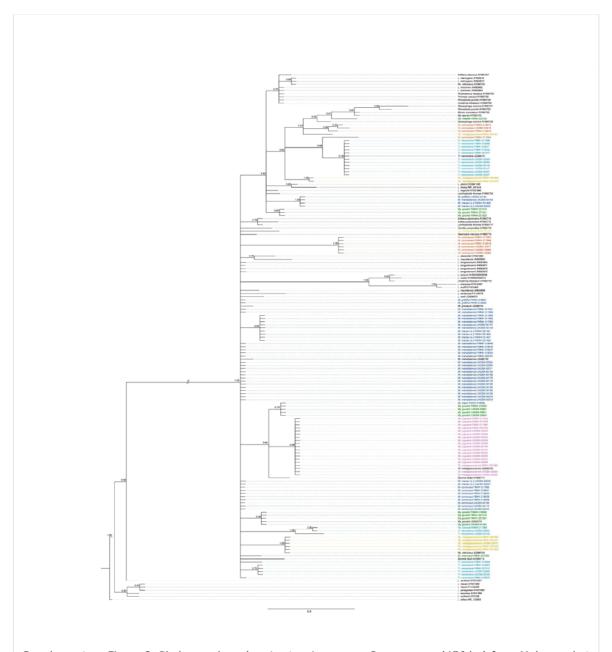

Supplementary Figure 2. Phylogeny based on Leptospira spp. rrs2 sequences (456 bp) from Malagasy bat species. The analysis was carried out using Bayesian Inference under the K2P+I+G substitution model. Nodal supports values correspond to posterior probabilities. The detected Leptospira spp. are coloured according to the family of bats host species (yellow: Emballonuridae, red: Hipposideridae, blue: Miniopteridae, purple: Molossidae, orange: Pteropodidae, light-blue: Rhinonycteridae and green: Vespertilionidae). Names typed in black refer to Leptospira (L.) sequences accessible from GenBank (see Supplementary Table 1). Co: Coleura, Hi: Hipposideros, Mi: Miniopterus, Mo: Mormopterus, My: Myotis, Ne: Neoromicia, Pa: Paratriaenops, Ot: Otomops, Ro: Rousettus, Sc: Scotophilus and Tr: Triaenops. 300x396mm (300 x 300 DPI)

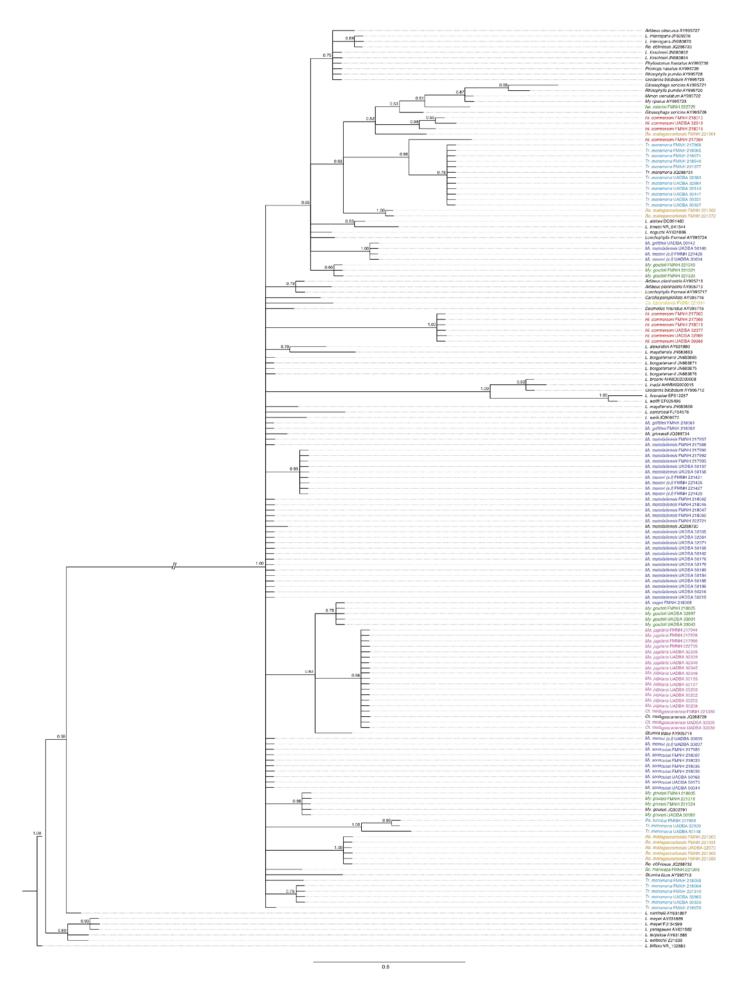

3. Résultats majeurs

Cette étude a mis en évidence une diversité remarquable des leptospires pathogènes dans les chauves-souris de Madagascar, confirmant les études présentées dans le chapitre I. De plus, cette étude révèle que la diversité bactérienne est structurée par une forte spécificité des leptospires pour leurs hôtes chiroptères. En l'absence de structuration géographique, la communauté bactérienne détectée sur un site dépend de l'assemblage des espèces hôtes occupant ce site. Le signal de co-évolution entre les chauves-souris et les leptospires dépend des marqueurs utilisés. La diversité des leptospires au sein des chauves-souris malgaches résulte de différents évènements évolutifs tels que host-switch ou co-spéciation, dont certains ont vraisemblablement été favorisés par l'écologie de ces hôtes mammifères.

Chapitre IV : Implication des leptospires de la faune de Mayotte dans l'épidémiologie de la leptospirose humaine

1. La leptospirose à Mayotte

L'étude présentée dans ce chapitre intègre la majeure partie des conclusions de cette thèse, à savoir (i) la présence d'une diversité remarquable de leptospires dans la faune régionale résultant de la radiation des mammifères hôtes et (ii) une épidémiologie de la leptospirose humaine particulière dans l'archipel des Comores. Nous faisons l'hypothèse que cette épidémiologie humaine particulière découle au moins en partie de la présence dans la région d'une diversité de leptospires autochtones voire endémiques et d'origine malgache.

La leptospirose humaine à Mayotte est caractérisée par une diversité bactérienne importante comprenant au moins quatre espèces de leptospires distinctes : *Leptospira interrogans, L. borgpetersenii, L. kirschneri* et *L. mayottensis*. En se basant sur une partie de la séquence du gène *rrs2*, Amélie Desvars et ses collaborateurs ont montré que *Rattus rattus* (rat noir) était le réservoir des quatre espèces de leptospires à l'origine des cas cliniques à Mayotte (Desvars *et al.* 2012). En cohérence avec les résultats présentés au chapitre III, une étude récente menée sur les petits mammifères terrestres malgaches a révélé une grande diversité de leptospires avec une spécificité d'hôte importante (Dietrich *et al.* 2014). Plus spécifiquement, ce travail démontrait que *L. mayottensis*, détectée jusqu'alors uniquement dans les cas cliniques de Mayotte, résultait de la radiation des espèces de la famille des Tenrecidae sur la grande île (Dietrich *et al.* 2014). Dans ce contexte, nous avons mené une étude sur la faune sauvage endémique et introduite de Mayotte afin d'évaluer le rôle de la faune locale, comportant des taxons d'origine malgache, dans l'épidémiologie humaine de la leptospirose sur l'archipel comorien.

L'article qui suit, soumis à la revue mBio, présente une étude moléculaire sur les leptospires hébergés par la faune mahoraise autochtone et introduite. Afin d'avoir une identification complète, nous avons réalisé une mise en culture des leptospires isolés à partir de reins d'animaux qui ont été ensuite utilisés pour réaliser un génotypage à l'aide de tous les marqueurs d'un schéma Multi Locus Sequences Typing (MLST) précédemment décrit (Ahmed et al. 2006; Dietrich et al. 2014). L'étude a été réalisée sur R. rattus, les chiens (Canis lupus), les chauves-souris frugivores (Pteropus seychellensis) et insectivores (Chaerephon sp.), et deux espèces mammifères consommées localement par la population : le zébu (Bos indica) et le tangue (Tenrec ecaudatus). Rappelons que cette dernière espèce, introduite de Madagascar comme viande de brousse, appartient à la famille des Tenrecidae dont Muriel Dietrich et ses collaborateurs ont montré qu'elle constituait à Madagascar le

2. Article 4

An introduced wild mammal species (*Tenrec*: Tenrecidae) to Mayotte Island, western Indian Ocean, is an important reservoir of the human pathogenic *Leptospira mayottensis*

Lagadec E, **Gomard Y**, Le Minter G, Cordonin C, Cardinale E, Ramasindrazana B, Dietrich M, Goodman S M, Tortosa P and Dellagi K.

Soumis à la revue mBio.

An introduced wild mammal species (*Tenrec*: Tenrecidae) to Mayotte Island, western Indian Ocean, is an important reservoir of the human pathogenic *Leptospira mayottensis*

Running title: Mammal sp. introduction leads to *Leptospira* emergence.

Erwan Lagadec^{1,2}, Yann Gomard^{1,2}, Gildas Le Minter^{1,2}, Colette Cordonin^{1,2}, Eric Cardinale^{1,3}, Beza Ramasindrazana^{1,2}, Muriel Dietrich^{1,4}, Steven M Goodman^{5,6}, Pablo Tortosa^{1,2} and Koussay Dellagi^{1,2*}

- ¹ Centre de Recherche et de Veille sur les Maladies Emergentes dans l'Océan Indien (CRVOI), Plateforme de Recherche CYROI, 97490 Sainte Clotilde, La Réunion, France.
- ² Université de La Réunion, UMR PIMIT «Processus Infectieux en Milieu Insulaire Tropical», INSERM U 1187, CNRS 9192, IRD 249. Plateforme de Recherche CYROI, 97490 Sainte Clotilde, La Réunion, France.
- ³ UMR CMAEE « Contrôle des maladies animales, exotiques et émergentes », Plateforme de recherche CYROI, 2 rue Maxime Rivière, 97490 Sainte Clotilde, La Réunion, France.
- ⁴ Department of Microbiology and Plant Pathology, Faculty of Natural and Agricultural Sciences, University of Pretoria, Pretoria 0002, South Africa.

⁵Field Museum of Natural History, 1400 South Lake Shore Drive, Chicago, IL 60605-2496, United States of America.

⁶Association Vahatra, BP 3972, Antananarivo 101, Madagascar.

*Correspondence to: Koussay Dellagi, CRVOI, Plateforme de recherche CYROI, 2 rue Maxime Rivière, 97490 Ste Clotilde, France. Email: koussay.dellagi@ird.fr

Abstract

Leptospirosis is a bacterial zoonosis of major concern on tropical islands. Human populations on western Indian Ocean islands are strongly affected by the disease although distinct archipelagos express contrasting epidemiology. For instance, Mayotte, part of the Comoros archipelago, differs from the other neighbouring islands by a high diversity of Leptospira species infecting humans that includes Leptospira mayottensis, a species thought to be unique to this island. Using Polymerase Chain Reaction, bacterial culture and molecular typing, the present study explored the wild and domestic local fauna for renal carriage of Leptospira, characterized the genetic relationships of the infecting strains with local clinical isolates and with Leptospira strains hosted by mammal species endemic to nearby Madagascar. Tenrec ecaudatus (Family Tenrecidae), a terrestrial mammal introduced from Madagascar, is identified as the exclusive reservoir of L. mayottensis. All isolated L. mayottensis haplotypes form a monophyletic clade that includes Leptospira infecting humans and tenrecs on Mayotte, as well as two other Malagasy endemic tenrecid species of the genus Microgale.. The lower diversity of L. mayottensis in tenrecs from Mayotte, compared to that occurring in Madagascar, suggests that L. mayottensis has indeed a Malagasy origin. We also show that introduced rats (Rattus) and dogs (Canis) are the main reservoirs of Leptospira borgpetersenii and Leptospira kirschneri, both bacteria being prevalent in local clinical cases. Data emphasize the epidemiological link between the two neighbouring islands and the role played by introduced small mammals in shaping the local epidemiology of leptospirosis.

Importance

Islands are exceptionally prone to species introduction, including pathogens with detrimental public health consequences brought by the establishment of aliens. Our study shows how the local non-native mammal fauna of Mayotte Island have been associated with the introduction and epidemiology of human leptospirosis, a zoonosis strongly affecting tropical islands. Data presented herein identify *Tenrec ecaudatus* (Family Tenrecidae), an insectivorous species introduced from neighbouring Madagascar, as the single reservoir of the recently named *Leptospira mayottensis*. Further, we provide evidence for a Malagasy origin of *L. mayottensis*, which occurs naturally within the Tenrecidae radiation endemic to Madagascar. Altogether, our study highlights the impact of species introduction on human health and further suggests that the biogeography of microorganisms in insular ecosystems, including pathogenic endemic lineages, should be considered from evolutionary and medical perspectives.

Introduction

Leptospiras is a bacterial zoonosis caused by pathogenic spirochetes of the genus Leptospira. Human infection is common in tropical countries where warm and humid conditions favour the survival of Leptospira in water and soil. Human populations living in rural areas or in impoverished urban zones with inadequate sanitation can be exposed to the infection via the contaminated environment. A wide variety of mammal species can be infected by Leptospira but not all act as reservoirs. Following infection, animal reservoirs support the chronic colonization of their renal tubules by a bacterial biofilm and are able to release viable Leptospira in their urine. In the absence of renal colonization, infected hosts (including humans) are considered as dead ends and do not play any significant role in the transmission cycle. Rodents and particularly rats (e.g. Rattus) are considered as the principal reservoir of Leptospira and the main source of human infection, a role likely favored by the worldwide distribution and commensal behaviour of some of these invasive species.

Two methods are currently used to group *Leptospira*: a phenotypic classification based on the microscopic agglutination test (MAT) that recognizes over 25 serogroups and 300 serovars (1) and a more recently introduced genetic classification based on bacterial DNA sequences that allows the identification of 20 *Leptospira* species including nine being pathogenic (2). Genotyping through Multiple Locus Sequence Typing (MLST) based on a selected set of housekeeping genes (3) has became a method of choice to identify *Leptospira* at the inter- and intra-species level. Indeed, molecular typing allows deciphering the molecular epidemiology of the disease, sharing data among laboratories investigating distant geographic regions and analyzing the evolution of host-parasite relationships using robust molecular characters (4).

The incidence of human leptospirosis has been reported to be highest in tropical islands and this observation holds true for the southwestern Indian Ocean (SWIO) region (5). Poorly documented on Mauritius and Madagascar, the incidence of the disease on Seychelles

ranks first worldwide among surveyed countries (5) while on Reunion Island, a French overseas department, the rate of human leptospirosis has been reported to be nearly 20 times higher than in continental France (6).

Mayotte, the most southern island of the Comoros Archipelago is a French overseas department located in the northern entrance of the Mozambique Channel of about 375 km² and about 300 km off the northwestern coast of Madagascar. Human leptospirosis is highly prevalent on the island with an annual incidence in 2013 estimated at 35 per 100 000 (6). Most interestingly, Leptospira strains isolated from human patients showed a much wider species diversity on Mayotte than on Reunion (7), with at least 16 different haplotypes or "sequence types" (STs) identified by MLST (8). Prevalent species in acute human cases were identified as Leptospira interrogans, Leptospira borgpetersenii, Leptospira kirschneri and members of a previously undefined phylogroup that has recently been named as Leptospira mayottensis (9). This diversity, unique so far to the SWIO region, likely reflects local ecoepidemiologic specificities of the animal reservoirs. With the exception of bats, no native small mammals occur on Mayotte. Although one study has previously investigated animal reservoirs on Mayotte (10), it targeted only introduced Rattus for kidney carriage of Leptospira, whereas other species of the local wild and domestic fauna were screened by MAT, a serological test that provides evidence of previous infections but does not assess the actual carrier state of the investigated animals. Thus, the actual reservoir of L. mayottensis remains to be identified. Of importance to the present study, L. mayottensis has been recently detected in small mammals endemic to the neighbouring Madagascar (4) and it can be hypothesized that the geographic proximity and different socio-economic exchanges between these two islands could have facilitated the introduction of this bacterial species and its associated introduced mammal reservoirs to Mayotte.

Hence, the aim of the present study was to investigate the wild (native and introduced)

and domestic mammalian fauna on Mayotte in order to assess whether a specific reservoir of *L. mayottensis* could be locally identified and to further highlight the local specificities leading to the peculiar epidemiology of human leptospirosis on the island.

Materials and methods

Ethical Statement. All animal procedures carried out in this study were performed in accordance with the European Union legislation for the protection of animals used for scientific purposes (Directive 2010/63/EU). The ethical terms of the research protocol were approved by the CYROI institutional ethical committee (Comité d'Ethique du CYROI n° 114).

Animal sampling. Introduced black rats (*Rattus rattus*, Family Muridae) and tenrecs (*Tenrec ecaudatus*, Family Tenrecidae, Subfamily Tenrecinae) as well as native insectivorous (*Chaerephon* sp., Family Molossidae) and fruigivorous bats (*Pteropus seychellensis comorensis*, Family Pteropodidae) were trapped on Mayotte during three field sessions carried out from July 2012 to December 2014. Terrestrial small mammals were captured using live traps baited with grilled coconut and placed in natural or urban sites at eight localities for rats and at five localities for tenrecs. Rats and tenrecs were sacrificed by cervical dislocation or percussion of the cranial box and, for each individual, tissue was quickly collected from kidney, lung and spleen, pooled together and immediately stored at -80°C. *Chaerephon* bats were captured at dusk or at night using mist nets placed either in the vicinity of synanthropic roost sites or across flyways, while *Pteropus* bats were captured at night using mist nets set around fruiting trees. Captured bats were individually kept in clean cloth bags and brought back to a local laboratory. Blood samples were collected from the brachial vein and centrifuged to obtain serum. In many cases after their removal from holding bags, animals spontaneously urinated and samples were collected. Bats were subsequently released at dusk

at the initial capture site. Dogs (*Canis lupus familiaris*) were exclusively manipulated and sampled by a local veterinary. Kidneys were obtained from animals that were euthanized for medical purposes, and/or urine collected from these same animals whenever possible. In addition, urine samples were obtained from non-euthanized dogs through aseptic vesicle catheterization. Kidneys from zebus (*Bos indica*) were purchased at the slaughterhouse of Mayotte (Kaweni) or obtained during traditional butchering.

Leptospira isolation. A few urine drops and/or a small piece of the freshly sampled kidney crushed under sterile conditions were used to inoculate three distinct culture media: (i) Ellinghausen-McCullough-Johnson-Harris (EMJH) liquid medium (Difco, Detroit, MI, USA) supplemented with Albumin Fatty Acid Supplement (AFAS; Royal Tropical Institute, Amsterdam, Netherlands) (11); (ii) EMJH liquid medium supplemented with AFAS, rabbit serum and fetal calf serum (1% each); and (iii) semisolid Fletcher medium (Difco, Detroit, MI, USA) supplemented with rabbit serum (8%). All media were supplemented with 5-fluorouracil (5-FU) at a final concentration of 200 μg.mL⁻¹. Cultures were incubated at 28°C, visually checked for the presence of *Leptospira* growth using a dark field microscope once a week for four months and positive cultures were further sub-cultured in fresh EMJH liquid medium deprived of 5-FU. DNA was extracted from 1 mL of each positive culture using the EZ1 Biorobot with Qiagen EZ1 DNA Tissue kits (Qiagen, Les Ulis, France).

Detection of pathogenic *Leptospira*. Approximately 1 mm³ of pooled organs (kidney, lung and spleen) from each rat and tenrec specimen and only kidney from dogs and cows were dissected on sterile ice and further processed as previously described (12). Thirty microliters of urine from bats and dogs were combined with 120 μL of Dulbecco's modified medium (GIBCO, Grand Island, NY, USA) and 50 μL of ATL buffer (Qiagen, Les Ulis, France).

Subsequently, total nucleic acids were extracted from urine or homogenized tissues by using EZ1 extraction robot and the EZ1 Virus Mini Kit version 2.0. A reverse transcription step was performed on total nucleic acids with GoScript Reverse Transcriptase (Promega, Madison, WI, USA) in order to obtain cDNA. Then, *Leptospira* detection was carried out on 5 μL of cDNA using a probe-specific real-time Polymerase Chain Reaction system (RT-PCR) targeting a fragment of the 16S rRNA gene (13).

Leptospira genotyping. Leptospira in samples testing positive by RT-PCR and/or culture were genotyped using a previously described MLST scheme encompassing 6 genes: secY, adk, rrs2, icdA, lipL32 and lipL41 (14), and recently optimized to improve the amplification of SWIO lineages (4). In an attempt to further characterize Leptospira from positive samples failing to produce MLST data, we used an alternative primer set (LA-LB) targeting rrs2 (18). The amplification of each marker was realized with GoTaq Hot Start Green Master Mix 2X (Promega, Madison, WI, USA) and further sequenced on both strands by direct Sanger sequencing (Genoscreen, Lille, France) using the same amplification primer sets. All sequences were deposited on GenBank under the following accession numbers: KT338823-KT338942 and KT725237-KT725243.

Phylogenetic analyses and genetic diversity. Accessible sequences from clinical Leptospira isolates from Mayotte were included in the study (7). Since icdA sequences were not provided for these clinical isolates, we used five out of the six markers of the MLST scheme in our analyses. In addition, we added to the study Leptospira sequences obtained from endemic terrestrial small mammals from Madagascar, i.e. Microgale cowani, M. dobsoni, M. majori, M. longicaudata and M. principula (Family Tenrecidae, Subfamily Oryzorictinae). The complete MLST of these Leptospira was produced in a previous study (4) and from cultures realized during field missions carried out in the Central Highlands of

Madagascar, Réserve Spéciale d'Ambohitantely, in March and October 2014. Sequence alignments are freely accessible on Dryad (XXXX).

Phylogenetic analyses were performed on each gene separately and subsequently on concatenated sequences using the best model of sequence evolution determined by jModelTest v.0.1.1 (15) for each dataset. Bayesian analyses were performed with MrBayes 3.1.2 (16) and consisted of two independent runs of four incrementally heated Metropolis Coupled Markov Chain Monte Carlo (MCMCMC) starting from a random tree. MCMCMC was run for 10,000,000 generations with trees and associated model parameters sampled every 100 generations. The convergence level of each phylogeny was validated by an average standard deviation of split frequencies inferior to 0.05. The initial 10% of trees from each run were discarded as burn-in and the consensus phylogeny along with posterior probabilities were obtained from the remaining trees. Bayesian trees were visualized and rooted to midpoint with FigTree v.1.3.1 (Andrew Rambaut, Institute of Evolutionary Biology, University of Edinburgh, 2006 to 2009; http://tree.bio.ed.ac.uk/).

Genetic diversity was compared between the identified clades in the multilocus phylogeny by estimating the nucleotide diversity (π) within each clade from the concatenated sequences using DNASP v.5.10.01 (17).

Results

Altogether, 486 samples of tissue and/or urine collected on Mayotte from 289 *Rattus* rattus, 37 Tenrec ecaudatus, 53 Canis lupus familiaris, 18 Bos indica, 69 Chaerephon sp. and 20 Pteropus seychellensis comorensis were screened for Leptospira by RT-PCR and/or culture. The results are summarized on Table 1.

449 TABLE 1 Animals from the wild and domestic fauna of Mayotte tested for renal carriage of Leptospira by RT-PCR, culture, and

genotyping. Lb: L. borgpetersenii, Lm: L. mayottensis, Li: L. interrogans, Lk: L. kirschneri. 450

^a OP: organ pool, K: kidney, U: urine. ^b Number of animals with paired sampling (OP/K+U). 451

Species	Number of animals tested by RT-	Number of animals tested by	Number of Leptospira positive animals	Number of typed Leptospira among	T	Leptospira species	specie	S.
	PCK (OP/K, U)²	culture (OP/K, U) ^a	(%)	positive samples	Lb	Lm	Li	Lk
Rattus rattus	289 (OP = 289)	81 (OP/K = 81)	46 (15.9)	21	13	,	3	2
Tenrec ecaudatus	37 (OP/K = 37)	36 (OP/K = 36, U=17) (17b)	10 (27.0)	∞	ı	∞	ı	ı
Bos indica	18 (K = 18)	'	1 (5.6)	0	,	•	,	
Canis lupus familiaris	53 $(OP/K = 38, U = 45) (30^b)$,	7 (13.2)	9	33	,	,	ιń
Chaerephon sp.	69 (U = 69)	(69 = N)	0	,	1	1	•	1
Pteropus seychellensis comorensis	20 (U=20)	20 (U=20)	2 (10.0)	1	-			1

Leptospira detection by RT-PCR and culture. Leptospira were detected by RT-PCR in 27.0% of tenrecs, 15.9% of rats, 13.2% of dogs, 10.0% of frugivorous bats, and 5.6% of zebus. All urine samples from insectivorous bats tested negative by RT-PCR. Bacterial cultures were attempted using kidney homogenates and/or urine samples from 117 and 94 animals, respectively. Overall, Leptospira culture was successful for samples testing positive through RT-PCR only. Positive cultures were obtained for eight of the 14 RT-PCR-positive rat samples (57.1%) and for eight of the 10 RT-PCR-positive tenrec samples (80%). Two tenrecs (MDI295 and MDI321) yielded positive culture from both urine and kidney samples. Lastly, no isolate grew in cultures from RT-PCR positive P. seychellensis comorensis samples.

Leptospira species diversity in wild and domestic mammals. We were able to PCR amplify all six loci of the MLST scheme using DNA extracted from all 16 Leptospira cultures, obtained from eight Rattus and eight Tenrec samples. As expected, PCR was more arduous when using DNA extracted from tissue and urine of PCR-positive samples for which culture had failed. For instance, no successful PCR was recorded for the two RT-PCR positive Tenrec failing to yield positive culture. Using the MLST scheme, only rrs2 locus was amplified from four PCR-positive Rattus, while two loci (secY and rrs2) were amplified from two other Rattus. Similarly, only rrs2 was amplified from six out of the seven RT-PCRpositive dog samples and from one out of the two RT-PCR-positive *Pteropus* bat samples. Lastly, no sequence could be obtained from the single zebu sample testing positive by RT-PCR. In addition, for seven PCR-positive *Rattus* samples failing to produce any data using the MLST scheme, we successfully amplified and sequenced the rrs2 gene using an alternative primer set (LA-LB). Altogether, we could identify *Leptospira* at the species level for 21 rats, eight Tenrec, six dogs and one frugivorous bat from Mayotte (see Table 1). Rattus-borne Leptospira appeared genetically diverse as L. borgpetersenii, L. kirschneri and L. interrogans were identified for 13, five and three samples, respectively. The sequencing of rrs2 locus in dog samples identified the infecting Leptospira as L. borgpetersenii (n = 3) and L. kirschneri (n = 3). We also identified one of the two PCR-positive frugivorous bats as infected by L. kirschneri. Most importantly, all Leptospira isolated and/or genotyped from Tenrec samples were identified as L. mayottensis.

Leptospira phylogenetic analyses. We constructed a concatenated phylogeny (2215 bp) using sequence data from the 16 animal Leptospira isolates from Mayotte, 17 previously described clinical isolates from Mayotte (7) and nine fully typed Leptospira infecting Malagasy endemic Tenrecidae, including six previously published haplotypes (4) and haplotypes obtained from three animals sampled in Réserve Spéciale d'Ambohitantely. The phylogeny presented on figure 1 shows that all *Leptospira* sequences obtained from T. ecaudatus clustered into the monophyletic well-supported L. mayottensis clade (P.P = 1.00) that includes two clinical L. mayottensis isolates (str. 200901116 and str. 200901122) as well as Leptospira haplotypes obtained from Microgale cowani and M. dobsoni, these latter species being tenrecids endemic to Madagascar. Out of the eight sequences obtained from T. ecaudatus in Mayotte, seven were identical to clinical L. mayottensis str. 200901122 (100% of pairwise identity based on 2215 bp) and the last one (MDI272) was closely related to the clinical L. mayottensis str. 200901116 (99.70% of pairwise identity based on 2215 bp). Of note, the couple of kidney/urine cultures obtained from two Tenrec individuals (MDI295 and MDI321) yielded identical genotypes. Leptospira mayottensis infecting Malagasy Microgale spp displayed a 27-fold higher nucleotide diversity (π =0.00298) compared to *Leptospira* infecting T. ecaudatus from Mayotte (π =0.00011). The full MLST-based phylogeny confirmed Rattus as carriers of L. interrogans and L. borgpetersenii. The L. interrogans clade included two identical haplotypes, one corresponding to a *Rattus*-borne *Leptospira* and one from a *L*. interrogans clinical isolate (str. 200901482). The L. borgpetersenii clade included

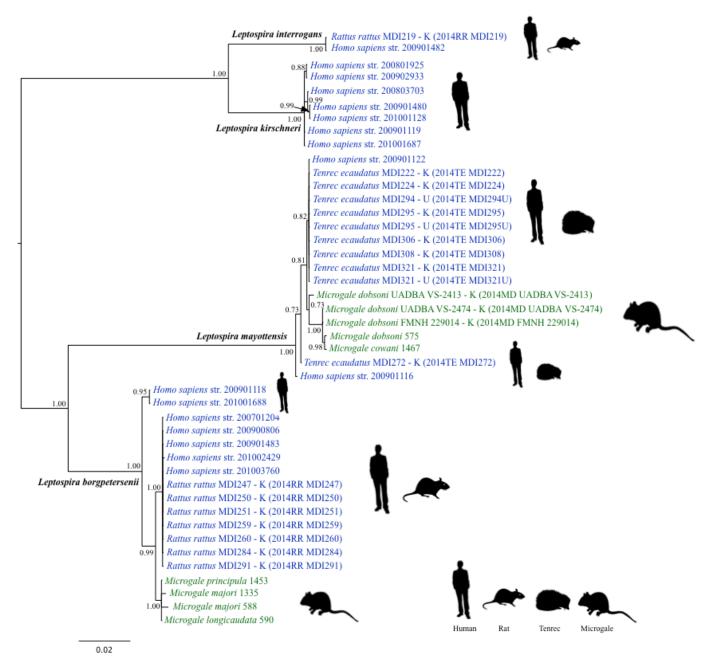


FIG 1 Bayesian phylogenetic tree of pathogenic *Leptospira* from Mayotte and Madagascar based on concatenated sequences of five genes (*secY*, *adk*, *lipL32*, *LipL41* and *rrs2*, total size: 2215 bp). The analysis was carried out using Bayesian Inference under the GTR+I substitution model. Nodal values correspond to the posterior probabilities. Sequences from Mayotte and Madagascar are indicated in blue and green colour, respectively. The letters "K" and "U" designate the sequences obtained from cultures of kidney or urine, respectively. For cultures, produced in the present study, the strain numbers are indicated in brackets. Note that two sequences obtained respectively from urine and kidney of the same individual are presented for samples of *Rattus rattus* MDI295 and MDI321. Specimen system: MDI = CRVOI specimen catalogue during field trips to Mayotte; FMNH = Field Museum of Natural History, Chicago; UADBA = Université d'Antananarivo, Département de Biologie Animale Antananarivo, Madagascar; for the other bacterial sequences from *Homo sapiens* and *Microgale* spp. see Bourhy *et al.* (7) and Dietrich *et al.* (4), respectively.

seven sequences obtained from *Rattus* that were almost identical (99.99% pairwise identity, 2215 bp) to five previously described clinical *L. borgpetersenii* isolates. Noteworthy, sequences embedded in this clade were clearly distinct (PP=0.99) from *L. borgpetersenii* sequences obtained from Malagasy tenrecids. The nucleotide diversity of *L. borgpetersenii* from Malagasy tenrecids (π =0.00181) was higher than that found in *Rattus* from Mayotte (π =0, one single haplotype).

Although full MLST was not successful for bats, dogs and for some of the *Rattus*, we further attempted to obtain *rrs2* sequences in order to produce data allowing disentangling the role of these animals in human leptospirosis on Mayotte. For instance, the single leptospiral *rrs2* (MLST scheme primers) sequence obtained from a frugivorous bat (*Pteropus*) was genetically related to clinical *L. kirschneri* isolates (98.70% pairwise identity, based on 452 bp) although nucleotide divergence together with PCR failure on all other loci suggested that *L. kirschneri* detected in frugivorous bats was actually divergent from clinical samples (see Fig. S1). Sequences obtained from dogs revealed perfect identity (based on 452 bp) with *L. borgpetersenii* (n=3) and *L. kirschneri* (n=2) clinical isolates from Mayotte. Lastly, *rrs2* (using LA-LB primers) sequencing on *rRattus* samples revealed five identical *L. kirschneri* sequences diverging from clinical isolates (3 mismatches out of 245 bp), thus in favour of a predominant role of dogs in *L. kirschneri* transmission to humans.

Discussion and conclusion

Recent reports of human leptospirosis in the SWIO have stressed two specificities that singularize Mayotte from the other islands of the region. On the one hand, *Leptospira* spp infecting humans on Mayotte are diverse and belong to four bacterial species (*L. borgpetersenii*, *L. interrogans*, *L. kirschneri* and *L. mayottensis*), which is rather distinct from

the situation in the Seychelles and Reunion Island where investigations clearly demonstrate a large predominance of *L. interrogans* infecting humans ((19), Biscornet *et al.*, Guernier *et al.*, unpublished data). On the other hand, the high leptospiral diversity described on Mayotte includes a recently described *Leptospira* species, *L. mayottensis*, thought to be unique to the island (8).

Our screening of the local fauna allowed characterizing 36 Leptospira samples at the species level. Leptospira were identified as L. borgpetersenii, L mayottensis, L. interrogans, and L. kirschneri. We revealed perfect or nearly perfect identity between (i) L. interrogans haplotypes obtained from patients and Rattus rattus, (ii) one L. borgpetersenii haplotype obtained from patients and R. rattus, and (iii) all L. mayottensis haplotypes obtained from patients and Tenrec ecaudatus. The sequencing of rrs2 locus suggests that L. kischneri reported in clinical cases originates from dogs. Finally, local bat species do not appear to play a significant epidemiological role in the transmission of leptospirosis, as all urine samples from the most common insectivorous bat species, Chaerephon sp., tested negative for Leptospira, this follows the results of low infection rates previously reported for this same bat genus on the neighbouring island of Anjouan. In addition, the single L. kirschneri rrs2 haplotype obtained from a Pteropus seychellensis comorensis specimen was clearly distinct from the lineages involved in human disease.

Altogether, these results highlight the role of introduced wild and domestic small mammal species in the epidemiology of leptospirosis on Mayotte.

Firstly, *T.ecaudatus is* the reservoir of *L. mayottensis* as this species was detected only in thus host and, in parallel, all *Leptospira* infecting these animals on Mayotte were strictly typed as *L. mayottensis*. Although the infection rate in *T. ecaudatus* was high (27.0%), it is likely to reach much higher levels during the rainy season. Indeed, three out of the four *Tenrec* captured during the end of the rainy season were positive, while only seven out of the 33

animals caught at the end of the dry season tested positive. In contrast to the previous report of Desvars *et al.* (10) who detected what would be subsequently named as *L. mayottensis* in two out of 20 positive *R. rattus*, we did not detect *L. mayottensis* infecting any of *R. rattus* investigated herein despite these animals being sampled in the present study during both dry (July 2012) and rainy (April 2014) seasons. Moreover, as our study included kidney sample cultures, the remarkably high success rate of *L. mayottensis* growth (80%) in culture should have biased results towards *L. mayottensis* detection in *R. rattus*. Hence, our results indicate at the very least that rats are not a significant reservoir of *L. mayottensis*.

Secondly, the genetic diversity of *L. mayottensis* in *T. ecaudatus* on Mayotte is narrow and corresponds to the same narrow diversity detected in humans, stressing the direct epidemiologic link between this animal reservoir and human disease. Other than general release of living *Leptospira* bacteria into the environment via urine, amongst portions of the local Maore cultural group living on Mayotte, *Tenrec* are widely exploited as bush meat, which would provide an additional interface for human contact with these animals during capture and slaughter.

Thirdly, the phylogenetic analysis supports that *L. mayottensis* likely originates from neighbouring Madagascar. Indeed, all *L. mayottensis* sequences cluster into a monophyletic well-supported clade including sequences obtained from three terrestrial small mammal species, namely *T. ecaudatus*, *Microgale dobsoni* and *M. cowani*, all belonging to the highly diversified Tenrecidae family representing an adaptive radiation of at least 32 endemic species, which colonized Madagascar some 25-30 million years ago (20). Interestingly, the sites where the positive animals were captured on Madagascar are several hundred kilometres apart, stressing the elective susceptibility of Tenrecidae to *L. mayottensis* infection.

Fourthly, *R. rattus* is a major reservoir of *Leptospira* on Mayotte as also reported worldwide. However and in contrast with data available from the other islands of the SWOI

region, where *R. rattus* are massively infected with *L. interrogans*, bacterial species infecting *R. rattus* on Mayotte were identified in most cases as *L. borgpetersenii* (61.9%, 13/21). Noteworthy, all *L. borgpetersenii* and *L. interrogans* obtained from *R. rattus*, showed perfect identity with human isolates based on the multilocus analysis. It appears that *R. rattus* on Mayotte are only marginally infected by *L. interrogans* despite the elective sensitivity of *R. rattus* to this *Leptospira* species worldwide, including on neighbouring Madagascar (21). This observation supports a massive contamination of the environment on Mayotte by *Leptospira* species other than *L. interrogans*, notably *L. borgpetersenii*. Although we identified *L. kirschneri* in five *Rattus*, sequence analyses (*rrs2*) suggest a predominant role of dogs in the human leptospirosis epidemiology. However, the absence of successful culture did not allow full genotyping of dog-hosted *Leptospira* and their implication in human transmission needs further investigations.

Fifthly, *L. borgpetersenii* haplotypes isolated from acute human cases on Mayotte group with two clearly distinct clades. The first lineage can be traced to *R. rattus* and is interestingly also closely related to a clade previously described as associated with endemic Malagasy *Microgale* (4), indicating a possible host shift from endemic to introduced mammals. The second *L. borgpetersenii* lineage, represented by two human isolates, appears related to *L. borgpetersenii* lineages reported worldwide, e.g. Denmark, China, and Slovakia (4), but not in any wild and domestic animals sampled herein. This cosmopolite lineage may have been introduced through a reservoir, which is yet to be identified.

Finally, the remarkably high success rate to grow in culture *L. mayottensis* from *T. ecaudatus* (8/10, 80%) and *L. borgpetersenii* from *R. rattus* (7/13, 53.8%) indicates some specific biological peculiarities of these strains on Mayotte. Indeed, using the same protocol, we have regularly failed to grow in culture any *Leptospira* from kidney extracts from terrestrial Malagasy wild mammals (Gomard *et al.*, unpublished data), except for the three

strains of *L. mayottensis* obtained from *M. dobsoni* and included on Figure 1. Hence, this property to readily grow on liquid culture medium may confer to these local lineages some adaptive advantage to survive and/or multiply in the environment. In fact, *L. mayottensis* was reported to grow over a wide range of temperature including 11°C and 37°C in contrast to other pathogenic strains (9).

Mayotte is a volcanic island that has emerged *de novo* some 5 million years ago. Its introduced terrestrial mammal fauna is derived from introductions different areas of the Old World, such as *R. rattus*, and more precisely the neighbouring biodiversity hotspot of Madagascar (22), specifically *T. ecaudatus*. The remarkable current terrestrial mammal richness is proposed to have derived from only four mammal colonization events (23), leading to the extraordinary diversity of primates, carnivorans, rodents and, of importance for the present work, tenrecids. Our data strongly supports that *L. mayottensis* has indeed diversified deep in geological time during the course of Tenrecidae evolution on Madagascar. The general apparent restriction of *L. mayottensis* to natural or introduced Tenrecidae hosts is a further evidence of co-divergence between *Leptospira* and reservoir host species as previously shown in Malagasy endemic small mammals (4).

Islands are considered as exceptionally prone to the successful introduction and subsequent invasive nature of exotic animals and plants (24) and have been studied in detail because of adaptive features of species in insular contexts. Our data document that a pathogen most certainly originally endemic to Madagascar has been introduced to the small island of Mayotte where it expanded to become a significant emerging human pathogen. From an evolutionary perspective, our study highlights that beside macro-organism diversity, the associated micro-biodiversity, including endemic microbial lineages, deserves to be included in studies of invasive biology in the context of island biogeography.

ACKNOWLEDGEMENTS

This study was supported by funds from ERDF-POCT Réunion, LeptOI (#32913), ParamyxOI (#33857), ECOSAN/CNRS-INEE "BatMan" and Agence Régionale de la Santé Ocean Indien (ARS-OI). Permits were issued by Direction de l'Environnement, de l'Aménagement et du Logement (DEAL) of Mayotte. We thank Office National des Forêts, Conseil Général of Mayotte and Association Naturalistes Environnement et Patrimoine de Mayotte for allowing animal capture on conservation sites. For Madagascar samples, permits were provided by Malagasy national authorities: Ministère de l'Environnement et des Forêts, Madagascar National Parks and the Département de Biologie Animale of the Université d'Antananarivo (N°238/14/MEEF/SG/DGF/DCB.SAP/SCB). We are also grateful to Catherine Dioniso in helping to locate some bat roost sites. COOPADEM provided the field group laboratory space on Mayotte and we would like to thank Marion Pannequin and Laure Dommergues particularly. We also thank Voahangy Soarimalala for helping in preparation of samples at Réserve Spéciale Ambohitantely. We deeply think Dr Bénédicte Contamin and Fondation Mérieux in Madagascar for providing logistical supports. Computations were performed on the "Université de La Réunion" supercomputer facility.

REFERENCES

- 1. **Levett PN**. 2001. Leptospirosis. Clin Microbiol Rev **14**:296–326.
- Cerqueira GM, Picardeau M. 2009. A century of *Leptospira* strain typing. Infect Genet Evol J Mol Epidemiol Evol Genet Infect Dis 9:760–768.
- 3. Ahmed A, Thaipadungpanit J, Boonsilp S, Wuthiekanun V, Nalam K, Spratt BG, Aanensen DM, Smythe LD, Ahmed N, Feil EJ, Hartskeerl RA, Peacock SJ. 2011.
 Comparison of two multilocus sequence based genotyping schemes for *Leptospira* species. PLoS Negl Trop Dis 5:e1374.
- Dietrich M, Wilkinson DA, Soarimalala V, Goodman SM, Dellagi K, Tortosa P.
 2014. Diversification of an emerging pathogen in a biodiversity hotspot: *Leptospira* in endemic small mammals of Madagascar. Mol Ecol 23:2783–2796.
- 5. Pappas G, Papadimitriou P, Siozopoulou V, Christou L, Akritidis N. 2008. The globalization of leptospirosis: worldwide incidence trends. Int J Infect Dis 12:351–357.
- 6. **Picardeau M**, **Bourhy P**. 2014. Annual activity report. National Reference Center for Leptospirosis. Institut Pasteur.
- 7. Bourhy P, Collet L, Lernout T, Zinini F, Hartskeerl RA, Linden H van der, Thiberge JM, Diancourt L, Brisse S, Giry C, Pettinelli F, Picardeau M. 2012. Human *Leptospira* isolates circulating in Mayotte (Indian Ocean) have unique serological and molecular features. J Clin Microbiol **50**:307–311.
- 8. Bourhy P, Collet L, Clément S, Huerre M, Ave P, Giry C, Pettinelli F, Picardeau M. 2010. Isolation and characterization of new *Leptospira* genotypes from patients in Mayotte (Indian Ocean). PLoS Negl Trop Dis 4:e724.
- 9. **Bourhy P, Collet L, Brisse S, Picardeau M**. 2014. *Leptospira mayottensis* sp. nov., a pathogenic *Leptospira* species isolated from humans. Int J Syst Evol Microbiol. 2014 Dec;64(Pt 12):4061-7. doi: 10.1099/ijs.0.066597-0. Epub 2014 Sep 23.

- Desvars A, Naze F, Vourc'h G, Cardinale E, Picardeau M, Michault A, Bourhy
 P. 2012. Similarities in *Leptospira* serogroup and species distribution in animals and humans in the Indian ocean island of Mayotte. Am J Trop Med Hyg 87:134–140.
- 11. **Ellinghausen HC**, **McCullough WG**. 1965. Nutrition of *Leptospira pomona* and growth of 13 other serotypes: fractionation of oleic albumin complex and a medium of bovine albumine and polysorbate 80. Am J Vet Res **26**:45–51.
- 12. Wilkinson DA, Temmam S, Lebarbenchon C, Lagadec E, Chotte J, Guillebaud J, Ramasindrazana B, Héraud J-M, de Lamballerie X, Goodman SM, Dellagi K, Pascalis H. 2012. Identification of novel paramyxoviruses in insectivorous bats of the southwest Indian Ocean. Virus Res 170:159–163.
- Smythe LD, Smith IL, Smith GA, Dohnt MF, Symonds ML, Barnett LJ, McKay
 DB. 2002. A quantitative PCR (TaqMan) assay for pathogenic *Leptospira* spp. BMC
 Infect Dis 2:13.
- 14. Ahmed N, Devi SM, Valverde M de los Á, Vijayachari P, Machang'u RS, Ellis WA, Hartskeerl RA. 2006. Multilocus sequence typing method for identification and genotypic classification of pathogenic *Leptospira* species. Ann Clin Microbiol Antimicrob 5:28.
- Posada D. 2008. jModelTest: Phylogenetic Model Averaging. Mol Biol Evol 25:1253
 -1256.
- Ronquist F, Huelsenbeck JP. 2003. MrBayes 3: Bayesian phylogenetic inference under mixed models. Bioinformatics 19:1572–1574.
- 17. **Librado P**, **Rozas J**. 2009. DnaSP v5: a software for comprehensive analysis of DNA polymorphism data. Bioinformatics **25**:1451–1452.

- 18. **Lourdault K**, **Aviat F**, **Picardeau M**. 2009. Use of quantitative real-time PCR for studying the dissemination of *Leptospira interrogans* in the guinea pig infection model of leptospirosis. J Med Microbiol **58**:648–655.
- 19. **Naze F, Desvars A, Picardeau M, Bourhy P, Michault A**. 2015. Use of a new high resolution melting method for genotyping pathogenic *Leptospira* spp. PloS One **10**:e0127430.
- 20. **Olson LE**. 2013. Tenrecs. Curr Biol **23**:R5–R8.
- 21. Rahelinirina S, Léon A, Harstskeerl RA, Sertour N, Ahmed A, Raharimanana C, Ferquel E, Garnier M, Chartier L, Duplantier J-M, Rahalison L, Cornet M. 2010. First isolation and direct evidence for the existence of large small-mammal reservoirs of *Leptospira* sp. in Madagascar. PloS One 5:e14111.
- 22. Myers N, Mittermeier RA, Mittermeier CG, da Fonseca GAB, Kent J. 2000. Biodiversity hotspots for conservation priorities. Nature 403:853–858.
- 23. Poux C, Madsen O, Marquard E, Vieites DR, de Jong WW, Vences M. 2005.
 Asynchronous colonization of Madagascar by the four endemic clades of primates, tenrecs, carnivores, and rodents as inferred from nuclear genes. Syst Biol 54:719–730.
- 24. **Elton CS**. 2000. The ecology of invasions by animals and plants. University Of Chicago Press.

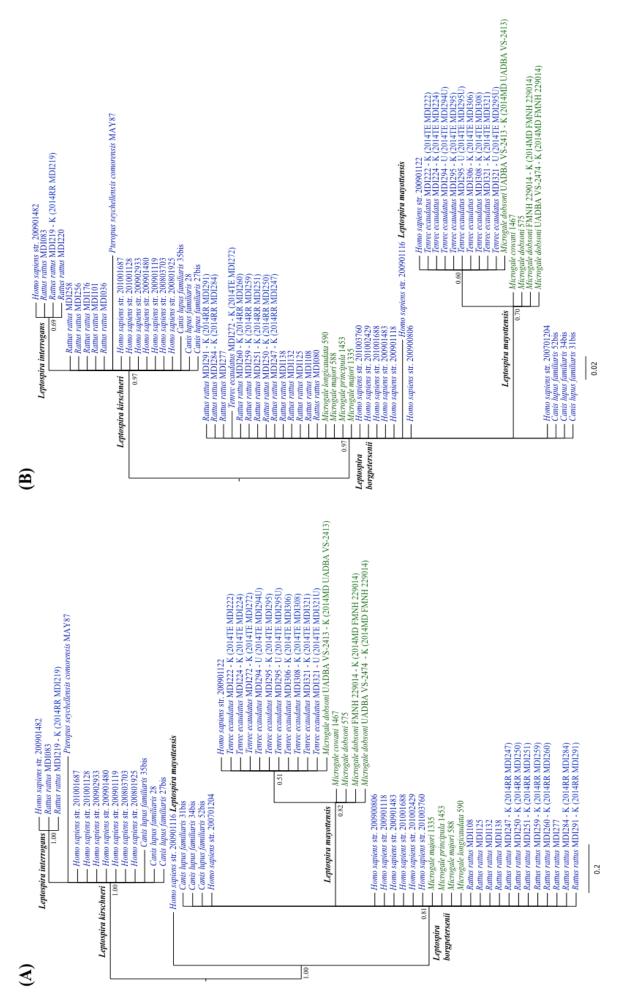


FIG S1 The figures A and B display Bayesian phylogenetic trees of pathogenic Leptospira from Mayotte and Madagascar based on 452 bp (57 taxa, HKY+H-G) and 245 bp (64 taxa, K80+I) of the rrs2 gene, respectively. Sequences from Mayotte and Madagascar are indicated in blue and green colour, respectively. The letters "K" and "U" designate sequences obtained from cultures of kidney or urine, respectively. For cultures, produced in the present study, the numbers are indicated in brackets. Note that two sequences obtained respectively from urine and kidney of the same individual are presented for samples of Rattus rattus MDI321. Specimen system: MDI and MAY = CRVOI specimen catalogue during field trips to Mayotte; All Canis lupus familiaris were sampled during field trips to Mayotte; FMNH = Field Museum of Natural History, Chicago; UADBA = Université d'Antananarivo, Département de Biologie Animale Antananarivo, Madagascar; for the other bacterial sequences from Homo sapiens and Microgale spp. see Bourhy et al. (7) and Dietrich et al. (4) respectively.

3. Résultats majeurs

Cette étude montre qu'à Mayotte l'épidémiologie humaine de la leptospirose implique au moins deux réservoirs majeurs à savoir : Rattus rattus et Tenrec ecaudatus (Tenrecidae). Nous montrons que le rat noir est le réservoir de deux espèces de leptospires responsables de cas humains : Leptospira interrogans et L. borgpetersenii. Nous montrons que T. ecaudatus est le réservoir de L. mayottensis et que les chiens sont aussi vraisemblablement impliqués dans la maladie humaine sur l'île.

Cette étude confirme que *L. mayottensis* est spécifique des espèces de la famille des Tenrecidae (Dietrich *et al.* 2014). Pris dans son ensemble, ce travail montre que l'épidémiologie particulière de la leptospirose à Mayotte résulte d'une diversité de leptospires dont au moins une partie est endémique de la région.

Discussion, conclusions et perspectives

Discussion et conclusions

La compréhension générale d'une zoonose et l'identification des facteurs favorisant sa survenue nécessitent a minima une investigation de chacun des compartiments impliqués, à savoir l'Homme, qui constitue un hôte accidentel, les pathogènes et leurs réservoirs (ainsi que les vecteurs arthropodes dans le cas d'arbopathogènes) en interaction dans leur(s) environnement(s). C'est cette démarche que nous avons adoptée en prenant comme modèle la leptospirose, une zoonose d'intérêt médical majeur dans la région du Sud-ouest de l'Océan Indien (SOOI). Des études antérieures, même si elles étaient incomplètes et difficilement comparables en raison des méthodologies hétérogènes mises en œuvre, suggéraient fortement que les différentes îles de la région montraient une épidémiologie contrastée. L'objectif général de cette thèse était d'identifier certains des déterminants de cette épidémiologie contrastée entre les îles du SOOI. Pour cela nous avons dans un premier temps produit des données humaines en Union des Comores, pays n'ayant jamais à notre connaissance rapporté de cas de transmission autochtone de leptospirose (chapitre I). Puis nous nous sommes intéressés à la faune endémique pour y décrire la diversité des leptospires et les associations hôtes-leptospires (chapitre II et III). Plus spécifiquement, nous avons utilisé la remarquable diversité de chauves-souris malgaches pour explorer les évènements évolutifs ayant conduit à la diversité bactérienne hébergée par ces mammifères volants (chapitre III). Dans le dernier chapitre, nous avons intégré les conclusions principales de cette thèse aux travaux menés au sein de notre équipe pour améliorer notre compréhension de l'épidémiologie de la leptospirose humaine sur l'île de Mayotte (chapitre IV).

1. La leptospirose en Union des Comores

Nos travaux montrent qu'en Union des Comores, les populations humaines sont exposées à la leptospirose, et que le profil sérologique de la maladie est comparable à celui de Mayotte (chapitre I). A l'échelle locale, ces données devraient stimuler la prise de mesures sanitaires pour la protection des populations vis à vis de cette zoonose. Notre investigation a été réalisée sur des excès de sérum de patients, majoritairement fébriles, collectés par différents laboratoires d'analyses et utilisés dans l'investigation des arboviroses en Union des Comores. Notre échantillon est clairement biaisé et les prévalences mesurées ne rendent donc pas compte du niveau d'exposition de la population générale. Il est donc nécessaire de mettre en place au niveau local une enquête épidémiologique ciblée permettant de mesurer précisément le niveau de séroprévalence de la population comorienne. Cette limite

dans l'échantillonnage résulte de la difficulté d'investigation de maladies infectieuses dans des pays comme l'Union des Comores où la leptospirose n'est pas connue même par les praticiens locaux et où d'autres problèmes sanitaires mais aussi socio-économiques compliquent singulièrement la mise en place de protocoles spécifiques. Néanmoins, les Tests de Micro Agglutination réalisés révèlent l'absence du sérogroupe Icterohaemorrhagiae pourtant majoritaire à La Réunion et aux Seychelles, la présence du sérogroupe Mini jusque là limitée dans la région à la seule île de Mayotte et enfin la présence de plusieurs sérogroupes également rapportés sur l'île de Mayotte, tels que Pyrogenes, Grippotyphosa et Pomona. Ces résultats, couplés aux études précédemment menées à Mayotte (Bourhy *et al.* 2012), montrent que l'absence de données humaines dans la région est au moins en partie imputable à l'absence d'investigation. Par ailleurs, la diversité des sérogroupes mise en évidence dans l'archipel des Comores suggère que la leptospirose humaine dans cet archipel résulte d'une diversité génomique de leptospires potentiellement comparable à celle décrite sur l'île de Mayotte.

2. Diversité et structuration des leptospires pathogènes chez les chiroptères.

Le profil de la leptospirose humaine dépend, entre autre, des leptospires présents dans l'environnement et, en amont, des espèces réservoirs qui maintiennent et excrètent ces pathogènes dans ce même environnement (Levett 2001; Bharti *et al.* 2003). Il est donc pertinent d'une part de caractériser les espèces de leptospires présents dans un environnement et en particulier dans les hôtes mammifères réservoirs, et d'autre part de chercher à comprendre comment est structurée cette diversité dans l'espace.

2.1. Diversité d'espèces hôtes et diversité de leptospires

Les îles du SOOI appartiennent à un des 25 hotspots de biodiversité terrestres, et Madagascar est même considérée comme un des cinq hotspots leaders (Myers *et al.* 2000). Si cette classification, arbitraire, prend en compte les dangers d'extinction, il n'en reste pas moins que Madagascar abrite une diversité de mammifères tout à fait remarquable et, de manière importante ici, bien décrite notamment grâce aux travaux menés par nos collaborateurs de l'Association Vahatra et du Département de Biologie Animale de l'Université d'Antananarivo (Goodman 2011 ; Soarimalala & Goodman 2011 ; Goodman & Raherilalao 2013). Dans ce contexte, nous avons proposé que cette faune essentiellement endémique héberge une diversité importante et originale de micro organismes, dont certains à

potentiel de transmission à l'homme. Nos investigations dans la région du SOOI supportent cette hypothèse et notamment pour ce qui concerne les leptospires pathogènes qui sont au cœur du travail présenté ici. La diversité des leptospires dans les chauves-souris de la région est corrélée à la diversité de leurs hôtes. Ainsi la richesse de leptospires à un site d'échantillonnage dépend de la richesse spécifique des chauves-souris occupant ce site (chapitre II et III). Au delà d'une importante diversité bactérienne, certains des leptospires de chauves-souris apparaissent comme étant clairement distincts de lignées/espèces précédemment décrites et ne peuvent être assignés à aucune espèce de leptospire connue (chapitre III). Cette diversité de leptospires dans les chauves-souris (insectivores et frugivores) et leur caractère unique ont été rapportés récemment par Dietrich et al. (2014) à Madagascar mais aussi en Afrique continentale (Ogawa et al. 2015) et en Amérique du Sud (Matthias et al. 2005). Il est intéressant de noter qu'au Danemark, en utilisant des approches d'infections expérimentales, les chercheurs K. L. Fennestad et C. Borg-Petersen soulignaient il y a plusieurs décennies déjà que les leptospires des chiroptères étaient très particuliers du point de vue de leur pathogénicité et probablement de leur composition antigénique (Fennestad & Borg-Petersen 1972).

2.2. Structuration des leptospires par espèces hôtes

Après avoir caractérisé la diversité de leptospires associés aux chauves-souris malgaches, essentiellement endémiques, nous avons cherché à identifier les déterminants impliqués dans la structuration de cette diversité bactérienne. Nous pouvons formuler les hypothèses (i) que la diversité des leptospires est structurée par les communautés des espèces hôtes, ou alternativement (ii) par des contraintes abiotiques qui favoriseraient une structuration géographique. La première hypothèse peut être facilitée par une forte spécificité d'hôte. Dans ce cas, la distribution du pathogène pourra se superposer à celle des hôtes. La capacité de certains leptospires à se maintenir de façon prolongée dans l'environnement favoriserait au contraire le partage d'une même communauté de leptospires par des espèces hôtes vivant dans un même environnement, tel que proposé récemment par Lei & Olival (2014).

Pour tester ces hypothèses, nous avons utilisé les chauves-souris malgaches comme modèle biologique en raison de leur importante diversité (45 espèces dont 80% endémiques), de leur distribution géographique (large ou limitée selon les espèces) et des assemblages d'espèces distincts existant sur les différents sites d'échantillonnage. La détection par PCR et le séquençage de trois *loci* bactériens (*secY*, *adk* et *rrs2*) révèlent **une forte spécificité des**

leptospires pour leur hôte mammifère (chapitre III). Cette spécificité d'hôte, remarquable, corrobore les quelques études moléculaires précédentes dont certaines réalisées en Afrique et à Madagascar (Dietrich *et al.* 2014 ; Ogawa *et al.* 2015). Cette spécificité d'hôtes stricte implique que la communauté de leptospires de chauves-souris dans un site donné dépend des espèces hôtes présentes sur ce site. L'absence de structuration géographique et la spécificité d'hôte stringente que nous mettons en évidence nous permettent de rejeter, pour notre modèle d'étude, l'hypothèse proposée par Lei & Olival (2014) à savoir une structuration géographique des communautés des leptospires.

La spécificité d'hôte des leptospires peut être plus relâchée que dans notre modèle biologique des chauves-souris. C'est ce que nous montrons à Mayotte mais uniquement sur des espèces mammifères introduites. Ainsi, les rats noirs et les chiens peuvent être infectés par différente espèces de leptospires (*Leptospira interrogans*, *L. borgpetersenii* et *L. kirschneri*) (**chapitre III**). De manière symétrique, il est également possible que certaines espèces de leptospires aient un large spectre d'hôte. Ainsi, des études récentes montrent que certaines espèces génomiques de leptospires infectent des espèces de mammifères de familles ou d'ordres différents (Cosson *et al.* 2014 ; Koizumi *et al.* 2015).

L'étude réalisée sur les petits mammifères terrestres endémiques de Madagascar montre également une forte spécificité d'hôte des leptospires (Dietrich et al. 2014). Les données présentées ici sur le modèle des chauves-souris complètent les travaux menés sur les petits mammifères terrestres endémiques (Dietrich et al. 2014) ou introduits (Guernier et al. en préparation) et révèlent une forte spécificité d'hôte pour les leptospires inféodés à la faune mammifère autochtone, et une spécificité plus relâchée pour des leptospires hébergés par les mammifères introduits. Ce patron peut s'expliquer par une survie différentes des leptospires endémiques et introduites après excrétion dans l'environnement. Ainsi, une survie supérieure des bactéries introduites (telles que L. interrogans) favoriserait une transmission indirecte entre espèces hôtes distinctes et sympatriques. Une survie limitée des bactéries autochtones faciliterait au contraire une transmission directe (par contact) entre hôtes d'une même espèce et favoriserait une spécialisation des leptospires pour leurs espèces hôtes. Au delà de ces questions d'importance et qui pourront être explorées par des approches expérimentales et/ou génomiques, la forte spécificité d'hôte révélée par nos travaux suggère que l'histoire évolutive des leptospires de chauves-souris est intimement liée à celle de leurs hôtes.

3. Evolution des leptospires au sein de leurs hôtes : le cas des leptospires des chiroptères de Madagascar

L'accumulation d'études moléculaires et phylogénétiques a permis de proposer que l'actuelle diversité des mammifères endémiques terrestres de Madagascar résulte d'évènements de radiation ayant succédé à quatre colonisations indépendantes depuis l'Afrique continentale par les ancêtres des lémuriens (ordre des Primates), des tenrecs (ordre des Afrosoricida), des rongeurs (ordre des Rodentia, famille des Nesomyidae) et des carnivores (ordre des Carnivora) (Poux *et al.* 2005 ; Yoder & Nowak 2006 ; Krause 2010). Les datations estimées des différents évènements de colonisation sont présentées sur la (Figure 23) (Poux *et al.* 2005 ; Krause 2010). Cette connaissance exceptionnelle des histoires évolutives des hôtes couplée à la grande diversité des mammifères terrestres endémiques malgaches fournit un terrain d'étude exceptionnel pour explorer l'évolution des parasites au sein de ces hôtes.

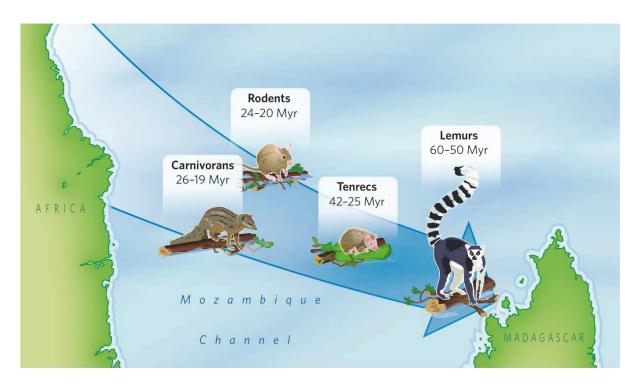


Figure 12. Les évènements uniques de colonisation des 4 ancêtres de mammifères placentaires à l'origine de la diversité des mammifères terrestres endémiques de Madagascar : les lémuriens, les tenrecs, les rongeurs et les carnivores (figure d'après Krause 2010). Myr : millions d'années.

Dans les cas des chauves-souris, les histoires de colonisations sont différentes mais la majorité des espèces ont une origine africaine et certaines d'entre elles sont issues d'une radiation récente (moins de 4,5 millions d'années); c'est le cas des espèces de *Miniopterus* (Miniopteridae) (Eger & Mitchell 2006 ; Goodman 2011 ; Christidis *et al.* 2014). Nous avons ici utilisé l'importante diversité de leptospires détectée dans les chauves-souris malgaches

pour identifier les processus évolutifs les plus probables à l'origine de la diversité des leptospires au sein des espèces et populations hôtes.

L'absence globale de signal de co-évolution entre les leptospires et les chauves-souris révélée par notre analyse pourrait s'expliquer par une succession de transferts horizontaux de gènes ou par un nombre de séquences trop limité et/ou par la faible résolution des marqueurs utilisés. Ainsi, les *loci* analysés (*adk*, *secY* et *rrs2*) conduisent à des conclusions opposées quant à la présence ou à l'absence de signal de co-évolution. Une étude comparable réalisée sur le modèle chauves-souris/*Bartonella* souligne aussi ces limites (Lei & Olival 2014). L'utilisation de génomes complets obtenus à partir de leptospires isolés de chauves-souris permettra de pallier à ces limites. Néanmoins, la mise en culture de leptospires de chauves-souris est aléatoire, et nous ne l'avons réussi à ce jour que sur un nombre limité d'espèces hôtes.

Malgré l'absence globale de signal de co-évolution, nos analyses nous renseignent sur les déterminants de la diversification des leptospires hébergés par les chauves-souris malgaches. Nous mettons en évidence l'importance des relations phylogénétiques des hôtes puisque des espèces hôtes phylogénétiquement proches hébergent des leptospires également phylogénétiquement proches. C'est le cas de la famille des Molossidae dans laquelle nous avons mis en évidence un scénario de co-spéciation entre plusieurs couples hôtes-parasites (chapitre III). Des évènements de host-switch sont détectés entre des espèces appartenant à deux familles différentes: Miniopterus spp. (Miniopteridae) spp. et Myotis goudoti (Vespertilionidae). Ces chauves-souris sont singulières car elles ont la capacité de former des colonies dans lesquelles elles établissent des contacts physiques entre espèces (syntonie). Un tel comportement pourrait avoir facilité des transmissions de leptospires entre Miniopterus spp. et Myotis goudoti qui sont impliquées dans quatre des sept évènements de host-switch proposés par nos analyses. De manière comparable, les analyses d'histoire évolutive des acariens de chauves-souris européennes ont révélé des évènements de host-switch entre espèces appartenant à deux familles différentes (Miniopteridae et Rhinolophidae) favorisés, selon les auteurs, par le regroupement des femelles de ces deux espèces durant la période de mise bas (Bruyndonckx et al. 2009). Notre étude montre l'importance de la phylogénie ainsi que de l'écologie des hôtes dans la diversification et la structuration des leptospires.

Nous avons étudié ici les mécanismes évolutifs impliqués dans la diversification des leptospires au sein d'animaux très particuliers que sont les chauves-souris. Des caractéristiques uniques à cet ordre de mammifères, telles que l'aptitude au vol ou le repos

suspendu à des supports, limitant les contacts avec le sol, pourraient préserver les chauves-souris de contacts avec la faune micro mammifère terrestre. Les analyses réalisées sur les petits mammifères terrestres de Madagascar montrent également une importante diversité de leptospires et une spécificité d'hôte importante (Dietrich *et al.* 2014). En Australie une étude a suggéré des transmissions de leptospires de chauves-souris frugivores vers les rongeurs par le biais de l'urine infectée (Tulsiani *et al.* 2011). Des analyses de co-évolution intégrant les leptospires des chauves-souris et de petits mammifères terrestres permettraient d'apporter des éléments de réponse quand aux potentiels évènements de host-switch unidirectionnels des chauves-souris vers les petits mammifères à Madagascar.

4. Epidémiologie de la leptospirose humaine dans le SOOI

En conclusion, dans le cadre de l'investigation de la leptospirose dans le SOOI, une partie de nos travaux a consisté à décrire et à étudier l'évolution des leptospires hébergés par des réservoirs endémiques. Les résultats majeurs apportés par les données MLST confirment la puissance de cette méthode de génotypage dans l'investigation moléculaire de l'épidémiologie de la leptospirose humaine et animale (Levett 2007 ; Thaipadungpanit et al. 2007 ; Bourhy et al. 2010 ; Zhang et al. 2015). Toutefois, même si ce typage peut se réaliser sur des matrices d'ADN extraites de tissus d'animaux (Dietrich et al. 2014), de faibles charges bactériennes peuvent limiter voire empêcher un génotypage complet. L'obtention de cultures bactériennes constitue une alternative intéressante même si l'isolement de ces bactéries est fastidieux, nécessite des conditions de stérilité souvent incompatibles avec les contraintes de terrain, et présente des biais inhérents à toute technique. Au cours de nos travaux, nous avons fait le choix de réaliser des isolements de bactéries lorsque c'était possible, d'essayer d'obtenir un maximum de séquences des loci du MLST sur des matrices extraites de tissus, et lorsque ces deux approches n'étaient pas possibles, nous avons concentré nos efforts sur le séquençage au locus secY. Ce locus présente le double avantage d'être particulièrement polymorphe (Ahmed et al. 2006 ; Dietrich et al. 2014) et d'avoir déjà été utilisé dans différentes études qui ont abondamment renseigné les bases de données facilitant ainsi l'analyse des séquences obtenues à une échelle mondiale (Nalam et al. 2010 ; Bourhy et al. 2012, 2013; Cosson et al. 2014; Dietrich et al. 2014).

Nos études révèlent une importante diversité des leptospires et une structuration résultant d'associations hôtes-leptospires strictes. En combinant nos travaux aux études récentes réalisées par notre équipe, et en les superposant aux données épidémiologiques humaines que

nous avons contribué à enrichir (**chapitre I**), nous avons pu déterminer les réservoirs majeurs de leptospires sur l'île de Mayotte et nous apportons quelques éléments permettant d'éclairer l'épidémiologie contrastée de la leptospirose dans les îles de la région. L'épidémiologie de la leptospirose dans la région est diverse. Elle implique une diversité de leptospires importante à Mayotte, et potentiellement sur l'ensemble de l'archipel des Comores, incluant des lignées d'origine régionale, et essentiellement l'espèce *L. interrogans* à La Réunion et aux Seychelles (Figure 25). Le nombre extrêmement limité d'haplotypes de *L. interrogans* par ailleurs identiques à des haplotypes rapportés dans d'autres régions du monde est compatible avec une introduction récente.

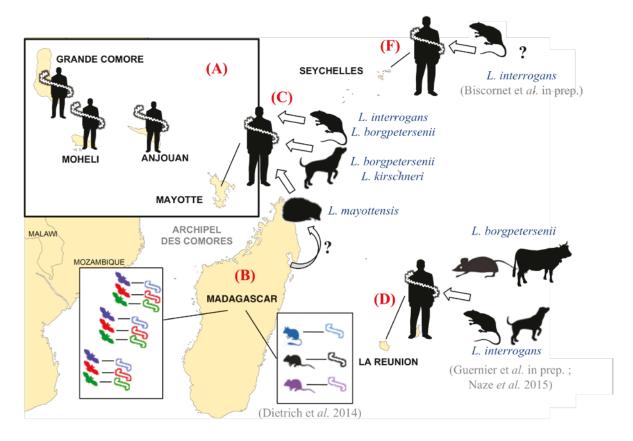


Figure 13. Synthèse des données produites permettant de comprendre en partie l'épidémiologie de la leptospirose dans les îles du Sud-ouest de l'Océan Indien : (A) En Union des Comores : exposition des populations humaines à des leptospires pathogènes ; (B, C et D) Différents types d'associations hôtes-leptospires (ex : spécifité d'hôtes des leptospires dans les petits mamamifères, majoraitairement endémiques, de Madagascar) ; (C) Identification des principaux réservoirs impliqués dans les cas cliniques de leptospirose à Mayotte ; (C, D et F) Différences dans la composition des espèces de leptospires présentes d'une part à Mayotte et d'autre part à La Réunion et aux Seychelles. Les données sont issues de la présente thèse, des études de notre équipe et de divers travaux menés dans la région (Yersin et al. 1998 ; Bourhy et al. 2010, 2012 ; Desvars et al. 2012 ; Pagès et al. 2014 ; Dietrich et al. 2014 ; Naze et al. 2015 ; Biscornet et al. en préparation ; Guernier et al. en préparation).

A Mayotte, les cas cliniques sont causés par quatre espèces de leptospires : L. borgpetersenii, L. interrogans, L. kirschneri et L. mayottensis (Bourhy et al. 2012). Notre étude basée sur un génotypage MLST, incluant 5 loci, révèle que le rat noir (Rattus rattus) est le réservoir de deux des quatre espèces retrouvées chez les cas cliniques (L. interrogans et L. borgpetersenii), le tangue (Tenrec ecaudatus) étant le principal si ce n'est l'unique réservoir de L. mayottensis (Figure 25). Le génotypage montre également que seul l'un des deux haplotypes de L. borgpetersenii mis en évidence chez les cas cliniques est retrouvé chez les rats noirs. Leptospira kirschneri est retrouvé dans une chauve-souris frugivore mais l'haplotype est différent de celui détecté dans les cas humain avec 98,7% de similarité entre les haplotypes en se basant sur 452 bp du *locus rrs2*. De même, chez cinq rats noirs, nous avons détecté un unique haplotype de L. kirschneri diffèrent de ceux isolés des cas cliniques (3 nucléotides de différence sur 245 bp du rrs2). Cela suggère que les rats noirs et les chauves-souris frugivores ne sont pas impliqués dans la transmission de L. kirschneri à l'Homme. En revanche, les chiens apparaissent impliqués dans l'épidémiologie de la leptospirose humaine en hébergeant les mêmes haplotyes de leptospires L. kirschneri et L. borgpetersenii que ceux des cas cliniques (100 % de similarité pour les séquences rrs2 sur 452 bp). Ne disposant que de séquences rrs2, nous ne pouvons toutefois pas confirmer définitivement le rôle des chiens dans la leptospirose humaine. Des investigations incluant des mises en culture sont nécessaires pour évaluer l'importance épidémiologique des chiens qui constituent une source d'infection de leptospires connue pour l'Homme (Levett 2001), notamment en milieu insulaire (Everard & Everard 1993; Weekes et al. 1997).

La situation épidémiologique de la leptospirose décrite ci-dessus à Mayotte pourrait s'appliquer aux autres îles de l'archipel des Comores. Cette hypothèse est soutenue par (i) une exposition des populations humaines aux mêmes sérogroupes de leptospires au sein de l'archipel (chapitre I), (ii) une origine géologique commune de toutes les îles et des conditions environnementales comparables, (iii) des échanges humains et animaux inter îles pouvant favoriser les transmissions de leptospires et (iv) une faune comparable sur les îles incluant notamment la présence de *T. ecaudatus* (Louette *et al.* 2004). La situation très singulière de l'épidémiologie au sein de cet l'archipel peut s'expliquer par sa localisation géographique entre l'Afrique et Madagascar tel que précédemment proposée Desvars (2012). L'introduction des micro organismes pathogènes d'origine africaine dans l'archipel des Comores a été récemment documentée (Deken *et al.* 2007 ; Yssouf *et al.* 2011 ; Roger *et al.* 2014). Si les résultats de la présente thèse (chapitre IV) et ceux des études précédentes

(Dietrich *et al.* 2014) supportent une origine malgache de *L. mayottensis*, une origine africaine d'autres lignées retrouvées chez les cas cliniques de Mayotte devra être explorée par le typage de leptospires de la faune africaine continentale.

A La Réunion et aux Seychelles, les leptospires responsables des cas cliniques appartiennent tous quasi exclusivement à l'espèce *L. interrogans* (Biscornet *et al.* en préparation; Guernier *et al.* en préparation) (Figure 25). *Leptospira interrogans* est représentée à La Réunion par deux haplotypes dont l'un, majoritaire, a été à l'origine d'une épidémie en Thaïlande (Thaipadungpanit *et al.* 2007). A La Réunion et aux Seychelles, les réservoirs majeurs sont les rats (ainsi que les chiens à La Réunion) (Guernier *et al.* en préparation; Biscornet *et al.* en préparation). Globalement, la quasi absence de diversité intra spécifique des leptospires identifiés chez les cas cliniques et la présence d'un haplotype dominant décrit dans d'autres régions du monde supportent une introduction récente de ces leptospires sur ces îles.

Au final on peut distinguer une leptospirose introduite à La Réunion et aux Seychelles, liée à des haplotypes bactériens que l'on peut qualifier de cosmopolites, et une leptospirose autochtone dans l'archipel des Comores (Figure 25). Ce patron pourrait trouver son origine dans l'histoire d'introduction des rongeurs sur les îles de l'Océan Indien. Si quelques études ont exploré l'origine des invasions de rats à l'échelle de l'Océan Indien (Tollenaere *et al.* 2010; Brouat *et al.* 2014), une étude plus complète permettra de préciser la structuration des populations de rats dans les îles du SOOI et pourra être superposée à la structuration géographique des leptospires pathogènes.

Perspectives

Cette thèse a apporté des éléments nouveaux concernant (i) la spécificité d'hôte des leptospires pathogènes, (ii) les processus évolutifs ayant contribué à leur diversification au sein de la région et (iii) la compréhension de l'épidémiologie contrastée de la leptospirose dans les îles de la région. Nous avons, dans le cadre de ces travaux, pu isoler un certain nombre de leptospires à partir de chauves-souris, de petits mammifères terrestres et introduits de la région. Cette biobanque constitue un matériel précieux qui permettra de poursuivre l'étude de la leptospirose par des approches expérimentales et génomiques. Pour la suite de ce travail nous proposons quelques perspectives :

Spécificité d'hôte et virulence des leptospires autochtones

L'un des résultats majeurs de ce travail est la mise en évidence de la spécificité extrême des leptospires pathogènes pour leurs hôtes endémiques. Néanmoins, nous ne savons pas si ce patron est contrôlé par la phylogénie ou, alternativement, l'écologie des espèces hôtes. Nous pourrons explorer cela par des expériences d'infection expérimentale utilisant un modèle animal réservoir tel que le rat qui permettra d'évaluer l'aptitude de ces leptospires autochtones/endémiques à coloniser les reins d'hôtes introduits. Symétriquement, il serait intéressant d'infecter des hôtes autochtones tels que les tangues ou les chauves-souris par des leptospires cosmopolites. Ce type d'infection est délicat car il nécessite d'avoir accès à une colonie de chauves-souris et de tangues. Il est prévu d'utiliser une colonie de Rousettus aegyptiacus (Pteropodidae, frugivore) maintenue en Afrique du Sud par l'équipe du Professeur Wanda Markotter (Université de Pretoria) partenaire scientifique de notre Unité. De même, des élevages de tangues ont été mis en place notamment dans des zoos américains mais également, de manière plus artisanale, à La Réunion. Il est envisageable de mettre en place un élevage mais il faudra veiller à réaliser des infections en milieu contrôlé de manière à éviter toute possibilité de contamination de l'environnement réunionnais par L. mayottensis, notamment. Par ailleurs, des données de surveillance épidémiologique indiquent des différences significatives dans la sévérité des cas hospitalisés à Mayotte d'une part et à La Réunion et aux Seychelles d'autre part. Ainsi, les Mascareignes et les Seychelles sont caractérisées par des taux de mortalité plus importants (3-8%) qu'à Mayotte (0,4%), de même, un tiers des patients sont admis en réanimation à La Réunion et aucun à Mayotte (Pagès, communication personnelle). Il est donc possible que les leptospires autochtones induisent des formes cliniques moins sévères que les leptospires cosmopolites. Cela pourra également être investigué par des infections expérimentales sur hamster utilisé comme modèle animal d'infection aigüe (Silva et al. 2008). Enfin, ces infections expérimentales devront être couplées à une étude génomique qui pourra permettre de révéler des régions génomiques impliquées dans la spécificité d'hôte et la virulence. Ces approches sont actuellement en cours dans la nouvelle unité PIMIT et font l'objet d'une thèse récemment initiée.

Etudes multi-parasites

Les chauves-souris sont considérées comme des réservoirs majeurs de parasites, potentiellement en raison de leur comportement grégaire, un métabolisme et/ou un système immunitaire particuliers (Calisher *et al.* 2006). En dehors du volet bactérien présenté ici, notre

Unité a eu l'opportunité d'explorer la diversité et la prévalence d'infection de différents parasites (virus, protozoaires, filaires et ectoparasites) sur ce même échantillon de chauves-souris malgaches (Wilkinson *et al.* 2012, 2014 ; Tortosa *et al.* 2013 ; Dietrich *et al.* 2014). Aujourd'hui, toutes ces données sont accessibles et compilées dans une même base de données. Il sera donc possible d'utiliser ces informations pour mettre en évidence des interactions entre différents parasites ou déterminer les facteurs influençant la richesse spécifique en parasite comme cela a été fait pour les parasites de chauves-souris du Sud-est de l'Asie (Gay *et al.* 2014).

Biogéographie microbienne

La famille des Tenrecidae est extrêmement diversifiée et constitue un exemple remarquable de radiation de mammifères ayant succédé à un événement de colonisation fondateur qui remonterait à 25-42 millions d'années (Poux et al. 2005). Cette famille est composée à Madagascar de pas moins de 32 espèces regroupées en 3 sous-familles (Tenrecinae, Geogalinae et Oryzorictinae) (Soarimalala & Goodman 2011). En Afrique uniquement 3 espèces appartenant aux genres Micropotamogale et Potamogale de la sous-famille des Potamogalinae sont présentes. Cette famille limitée à la région afro-malgache constitue un modèle intéressant pour des études de biogéographie de mammifères et microbienne. Nous avons approché le Professeur Link Olson (Université d'Alaska Museum of the North), un des spécialistes mondiaux de l'évolution de cette famille (Olson et al. 2004 ; Olson & Goodman 2006 ; Olson 2013), lors d'une conférence qui s'est tenue il y a quelques mois à Madagascar. Nous avons convenu qu'il serait intéressant de réaliser des études de génétique de populations fines permettant de déterminer l'origine géographique des tangues introduits dans les différentes îles de l'Océan Indien. Cela permettrait aussi de comprendre la présence et l'absence de L. mayottensis dans les différentes îles de la région. En effet, l'absence de L. mayottensis chez les cas cliniques en dehors de Mayotte, et l'absence d'infection chez les tangues réunionnais appellent des investigations complémentaires. Il serait en particulier intéressant d'échantillonner les tangues dans différentes régions de Madagascar, de déterminer leur statut d'infection, et de superposer ces données aux données de génétique des populations. Nous pourrions ainsi tester une hypothèse selon laquelle les tangues introduits à Mayotte proviennent d'une région où les populations sont particulièrement infectées. Par ailleurs, nous avons au laboratoire des cultures de L. mayottensis provenant de différentes espèces de la famille des Tenrecidae à savoir T. ecaudatus (sous-famille Tenrecinae) et deux espèces de *Microgale* (sous-famille Oryzorictinae) : *Microgale cowani* et *M. dobsoni*. Ce matériel biologique pourrait permettre de superposer l'histoire de la radiation des Tenrecidae (en cours de résolution par le Pr. Link Olson) à celle des leptospires pathogènes. Si les deux histoires évolutives sont compatibles, ce modèle fournirait une opportunité exceptionnelle de calibrer l'horloge moléculaire des leptospires. Au delà des spirochètes, une telle approche génomique founirait des données importantes quant aux études évolutives des procaryotes en général (Ochman *et al.* 1999 ; Dietrich *et al.* 2014).

Références bibliographiques

- Adler B, de la Peña Moctezuma A. *Leptospira* and Leptospirosis. *Vet Microbiol* 2010;**140**:287–96.
- Ahmed A, Engelberts MFM, Boer KR *et al.* Development and validation of a Real-Time PCR for detection of pathogenic *Leptospira* species in clinical materials. *PLoS ONE* 2009;4:e7093.
- Ahmed N, Devi SM, Valverde M de los Á *et al.* Multilocus sequence typing method for identification and genotypic classification of pathogenic *Leptospira* species. *Ann Clin Microbiol Antimicrob* 2006;**5**:28.
- Angelini R, Finarelli AC, Angelini P et al. An outbreak of chikungunya fever in the province of Ravenna, Italy. Euro Surveill Bull Eur Sur Mal Transm Eur Commun Dis Bull 2007a;12:E070906.1.
- Angelini R, Finarelli AC, Angelini P et al. Chikungunya in north-eastern Italy: a summing up of the outbreak. Euro Surveill Bull Eur Sur Mal Transm Eur Commun Dis Bull 2007b;12:E071122.2.
- Bharti AR, Nally JE, Ricaldi JN *et al.* Leptospirosis: a zoonotic disease of global importance. *Lancet Infect Dis* 2003;**3**:757–71.
- Bourhy P, Collet L, Brisse S *et al. Leptospira mayottensis* sp. nov., a pathogenic *Leptospira* species isolated from humans. *Int J Syst Evol Microbiol* 2014:ijs.0.066597–0.
- Bourhy P, Collet L, Clément S *et al.* Isolation and characterization of new *Leptospira* genotypes from patients in Mayotte (Indian Ocean). *PLoS Negl Trop Dis* 2010;4:e724.
- Bourhy P, Collet L, Lernout T *et al.* Human *Leptospira* isolates circulating in Mayotte (Indian Ocean) have unique serological and molecular features. *J Clin Microbiol* 2012;**50**:307–11.
- Bourhy P, Herrmann Storck C, Theodose R *et al.* Serovar diversity of pathogenic *Leptospira* circulating in the French West Indies. *PLoS Negl Trop Dis* 2013;7:e2114.
- Brouat C, Tollenaere C, Estoup A *et al.* Invasion genetics of a human commensal rodent: the black rat *Rattus rattus* in Madagascar. *Mol Ecol* 2014;**23**:4153–67.
- Bruyndonckx N, Dubey S, Ruedi M *et al.* Molecular cophylogenetic relationships between European bats and their ectoparasitic mites (Acari, Spinturnicidae). *Mol Phylogenet Evol* 2009;**51**:227–37.
- Bulach DM, Zuerner RL, Wilson P *et al.* Genome reduction in *Leptospira borgpetersenii* reflects limited transmission potential. *Proc Natl Acad Sci* 2006;**103**:14560–5.
- Calisher CH, Childs JE, Field HE *et al.* Bats: important reservoir hosts of emerging viruses. *Clin Microbiol Rev* 2006;**19**:531–45.

- Cameron CE. Leptospiral structure, physiology, and metabolism. In: Adler B (ed.). *Leptospira and Leptospirosis*. Springer Berlin, Heidelberg, 2015, 21–41.
- Cameron CE, Zuerner RL, Raverty S *et al.* Detection of pathogenic *Leptospira* bacteria in pinniped populations via PCR and Identification of a source of transmission for zoonotic leptospirosis in the marine environment. *J Clin Microbiol* 2008;**46**:1728–33.
- Casjens S. Borrelia genomes in the year 2000. J Mol Microbiol Biotechnol 2000;2:401–10.
- Cerqueira GM, Picardeau M. A century of *Leptospira* strain typing. *Infect Genet Evol J Mol Epidemiol Evol Genet Infect Dis* 2009;**9**:760–8.
- Chang SL, Buckingham M, Taylor MP. Studies on *Leptospira* Icterohaemorrhagiae: IV. Survival in water and sewage: destruction in water by halogen compounds, synthetic detergents, and heat. *J Infect Dis* 1948;**82**:256–66.
- Charon NW, Goldstein SF. Genetics of motility and chemotaxis of a fascinating group of bacteria: the Spirochetes. *Annu Rev Genet* 2002;**36**:47–73.
- Chomel BB, Stuckey MJ, Boulouis H-J *et al.* bat-related zoonoses. In: Sing A (ed.). *Zoonoses Infections Affecting Humans and Animals*. Springer, Dordrecht, 2015, 697–714.
- Christidis L, Goodman SM, Naughton K *et al.* Insights into the evolution of a cryptic radiation of bats: dispersal and ecological radiation of Malagasy *Miniopterus* (Chiroptera: Miniopteridae). *PLoS ONE* 2014;**9**:e92440.
- Cohen ML. Changing patterns of infectious disease. *Nature* 2000;**406**:762–7.
- Combes C. Parasitism: The Ecology and Evolution of Intimate Interactions. The University of Chicago Press, Chigago, 2001.
- Cosson J-F, Picardeau M, Mielcarek M et al. Epidemiology of Leptospira transmitted by rodents in Southeast Asia. PLoS Negl Trop Dis 2014;8:e2902.
- Costa F, Hagan JE, Calcagno J *et al.* Global morbidity and mortality of leptospirosis: a systematic Review. *PLoS Negl Trop Dis* 2015;**9**:e0003898.
- Cox TE, Smythe LD, Leung LK-P. Flying foxes as carriers of pathogenic *Leptospira* species. *J Wildl Dis* 2005;41:753–7.
- D'Aoust L, Mundodh P, Sookram C *et al.* Status report on public health in Mauritius in 2009. *Med Trop* 2010;**70**:229–38.
- Daszak P, Cunningham AA, Hyatt AD. Emerging infectious diseases of wildlife-- Threats to biodiversity and Human health. *Science* 2000;**287**:443–9.
- Deken R de, Martin V, Saido A *et al.* An outbreak of East Coast Fever on the Comoros: a consequence of the import of immunised cattle from Tanzania? *Vet Parasitol* 2007;**143**:245–53.

- Derne BT, Fearnley EJ, Lau CL *et al.* Biodiversity and leptospirosis risk: a case of pathogen regulation? *Med Hypotheses* 2011;77:339–44.
- Desvars A. Epidémiologie d'une zoonose, la Leptospirose, dans deux îles de l'Océan Indien, La Réunion et Mayotte - Etude comparée du rôle de différentes espèces sauvages et domestiques - Thèse, Université de La Réunion 2012.
- Desvars A, Cardinale E, Michault A. Animal leptospirosis in small tropical areas. *Epidemiol Infect* 2011;**139**:167–88.
- Desvars A, Michault A, Bourhy P. Leptospirosis in the western Indian Ocean islands: what is known so far? *Vet Res* 2013a;44:80.
- Desvars A, Naze F, Benneveau A *et al.* Endemicity of leptospirosis in domestic and wild animal species from Reunion Island (Indian Ocean). *Epidemiol Infect* 2013b;**141**:1154–65.
- Desvars A, Naze F, Vourc'h G *et al.* Similarities in *Leptospira* serogroup and species distribution in animals and humans in the Indian Ocean Island of Mayotte. *Am J Trop Med Hyg* 2012;**87**:134–40.
- Dietrich M, Mühldorfer K, Tortosa P, Markotter W. *Leptospira* and bats : story of an emerging friendship. PLoS Pathog, in press.
- Dietrich M, Wilkinson DA, Benlali A *et al. Leptospira* and *Paramyxovirus* infection dynamics in a bat maternity enlightens pathogen maintenance in wildlife. *Environ Microbiol* 2015, DOI: 10.1111/1462-2920.12766.
- Dietrich M, Wilkinson DA, Soarimalala V *et al.* Diversification of an emerging pathogen in a biodiversity hotspot: *Leptospira* in endemic small mammals of Madagascar. *Mol Ecol* 2014;**23**:2783–96.
- Drexler JF, Corman VM, Müller MA *et al.* Bats host major mammalian paramyxoviruses. *Nat Commun* 2012;**3**:796.
- Eger JL, Mitchell L. Chiroptera, Bats. In: Goodman SM, Benstead JP (eds.). *The Natural History of Madagascar*. The University of Chicago Press, Chigago, 2006, 1287–98.
- Ellinghausen HC, Mccullough WG. Nutrition of *Leptospira* Pomona and growth of 13 other serotypes: fractionation of oleic albumin complex and a medium of bovine albumin and polysorbate 80. *Am J Vet Res* 1965;**26**:45–51.
- Ellis WA. Animal Leptospirosis. In: Adler B (ed.). *Leptospira and Leptospirosis*. Springer Berlin, Heidelberg, 2015, 99–137.
- Emerson BC. Evolution on oceanic islands: molecular phylogenetic approaches to understanding pattern and process. *Mol Ecol* 2002;**11**:951–66.
- Enserink M. Breakthrough of the year. SARS: a pandemic prevented. *Science* 2003;**302**:2045.
- Everard JD, Everard COR. Leptospirosis in the Caribbean. Rev Med Microbiol 1993;4.

- Faine S, Adler B, Bolin C et al. Leptospira and Leptospirosis. Second edition. MediSci, Melbourne, 1999.
- Fennestad KL, Borg-Petersen C. Leptospirosis in Danish wild mammals. *J Wildl Dis* 1972;8:343–51.
- Foley NM, Thong VD, Soisook P *et al.* How and why overcome the impediments to resolution: lessons from rhinolophid and hipposiderid bats. *Mol Biol Evol* 2015;**32**:313–33.
- Ganoza CA, Matthias MA, Collins-Richards D *et al.* Determining risk for severe leptospirosis by molecular analysis of environmental surface waters for pathogenic *Leptospira*. *PLoS Med* 2006;**3**:e308.
- Ganoza CA, Matthias MA, Saito M *et al.* Asymptomatic renal colonization of humans in the Peruvian Amazon by *Leptospira*. *PLoS Negl Trop Dis* 2010;4:e612.
- Gay N, Olival KJ, Bumrungsri S *et al.* Parasite and viral species richness of Southeast Asian bats: fragmentation of area distribution matters. *Int J Parasitol Parasites Wildl* 2014;**3**:161–70.
- Gomard Y, Silai R, Hoarau G *et al.* Serologic evidence of leptospirosis in humans, Union of the Comoros, 2011. *Emerg Infect Dis* 2014;**20**:720–2.
- Goodman SM. Les chauves-souris de Madagascar. Association Vahatra, Antananarivo, 2011.
- Goodman SM, Benstead JP (eds.). *The Natural History of Madagascar*. The University of Chicago Press, Chigago, 2003.
- Goodman SM, Ramasindrazana B. Bats or order Chiroptera. In: Goodman SM & Raherilalao MJ (eds.). *Atlas of Selected Land Vertebrates of Madagascar*. Association Vahatra, Antananarivo, 2013, 169–209.
- Goodman SM, Soarimalala V, Raheriarisena M *et al.* Small mammals or tenrecs (Tenrecidae) and Rodents (Nesomyidae). In: Goodman SM & Raherilalao MJ (eds.). *Atlas of Selected Land Vertebrates of Madagascar*. Association Vahatra, Antananarivo, 2013, 211–69.
- Goodman SM, Raherilalao MJ (eds.). *Atlas of selected land vertebrates of Madagascar*. Association Vahatra, Antananarivo, 2013.
- Gould EA, Gallian P, De Lamballerie X *et al.* First cases of autochthonous dengue fever and chikungunya fever in France: from bad dream to reality! *Clin Microbiol Infect* 2010;**16**:1702–4.
- Grandadam M, Caro V, Plumet S *et al.* Chikungunya virus, southeastern France. *Emerg Infect Dis* 2011;**17**:910–3.
- Gubler DJ, Clark GG. Dengue/dengue hemorrhagic fever: the emergence of a global health problem. *Emerg Infect Dis* 1995;**1**:55–7.
- Guernier V, Hochberg ME, Guégan J-F. Ecology drives the worldwide distribution of human

- diseases. PLoS Biol 2004;2:e141.
- Haake DA, Levett PN. Leptospirosis in humans. In: Adler B (ed.). *Leptospira and Leptospirosis*. Springer Berlin, Heidelberg, 2015, 65–97.
- Halliday JEB, Allan KJ, Ekwem D *et al.* Endemic zoonoses in the tropics: a public health problem hiding in plain sight. *Vet Rec* 2015;**176**:220–5.
- Hamond C, Pinna A, Martins G *et al*. The role of leptospirosis in reproductive disorders in horses. *Trop Anim Health Prod* 2014;**46**:1–10.
- Hayman DTS, Bowen RA, Cryan PM *et al.* Ecology of zoonotic infectious diseases in bats: current knowledge and future directions. *Zoonoses Public Health* 2013;**60**:2–21.
- Johnson RC, Harris VG. Differentiation of pathogenic and saprophytic leptospires I. Growth at low temperatures. *J Bacteriol* 1967;**94**:27–31.
- Jones KE, Patel NG, Levy MA *et al.* Global trends in emerging infectious diseases. *Nature* 2008;**451**:990–3.
- Katz AR, Buchholz AE, Hinson K *et al.* Leptospirosis in Hawaii, USA, 1999–2008. *Emerg Infect Dis* 2011;**17**:221–6.
- Keesing F, Belden LK, Daszak P *et al.* Impacts of biodiversity on the emergence and transmission of infectious diseases. *Nature* 2010;**468**:647–52.
- Khasnis AA, Nettleman MD. Global warming and infectious disease. *Arch Med Res* 2005;**36**:689–96.
- Kilpatrick AM, Randolph SE. Drivers, dynamics, and control of emerging vector-borne zoonotic diseases. *The Lancet* 2012;**380**:1946–55.
- Kleinman A, Watson JL. SARS in China: Prelude to Pandemic? Stanford University Press, Stanford, 2006.
- Ko AI, Goarant C, Picardeau M. *Leptospira*: the dawn of the molecular genetics era for an emerging zoonotic pathogen. *Nat Rev Microbiol* 2009;7:736–47.
- Koizumi N, Izumiya H, Mu J-J *et al.* Multiple-locus variable-number tandem repeat analysis of *Leptospira interrogans* and *Leptospira borgpetersenii* isolated from small feral and wild mammals in East Asia. *Infect Genet Evol* 2015, DOI: 10.1016/j.meegid.2015.08.013
- Kolochine-Erber B, Brygoo ER. Research on leptospirosis in Madagascar. *Bull Soc Pathol Exot Ses Fil* 1956;**49**:686–98.
- Krause DW. Biogeography: Washed up in Madagascar. Nature 2010;463:613-4.
- Kumar KV, Lall C, Raj RV *et al.* Coexistence and survival of pathogenic leptospires by formation of biofilm with *Azospirillum*. *FEMS Microbiol Ecol* 2015;**91**:fiv051.
- Kwong JC, Druce JD, Leder K. Zika virus infection acquired during brief travel to Indonesia.

- *Am J Trop Med Hyg* 2013;**89**:516–7.
- Mérien F, Amouriaux P, Perolat P *et al.* Polymerase chain reaction for detection of *Leptospira* spp. in clinical samples. *J Clin Microbiol* 1992;**30**:2219–24.
- Lafferty KD, Wood CL. It's a myth that protection against disease is a strong and general service of biodiversity conservation: response to Ostfeld and Keesing. *Trends Ecol Evol* 2013;**28**:503–4.
- Laporte A, Michault A, Galtier J et al. Leptospirosis in Mayotte. Bull Soc Pathol Exot 1990;83:637–41.
- Lau CL, Skelly C, Dohnt M *et al.* The emergence of *Leptospira borgpetersenii* serovar Arborea in Queensland, Australia, 2001 to 2013. *BMC Infect Dis* 2015;**15**:230.
- Lau CL, Skelly C, Smythe LD *et al.* Emergence of new leptospiral serovars in American Samoa ascertainment or ecological change? *BMC Infect Dis* 2012;**12**:19.
- Lehmann JS, Fouts DE, Haft DH *et al.* Pathogenomic inference of virulence-associated Genes in *Leptospira interrogans*. *PLoS Negl Trop Dis* 2013;7:e2468.
- Lehmann JS, Matthias MA, Vinetz JM et al. Leptospiral pathogenomics. Pathogens 2014;3:280–308.
- Lei BR, Olival KJ. Contrasting patterns in mammal–bacteria coevolution: *Bartonella* and *Leptospira* in bats and rodents. *PLoS Negl Trop Dis* 2014;**8**:e2738.
- Levett PN. Leptospirosis. Clin Microbiol Rev 2001;14:296–326.
- Levett PN. Sequence-based typing of *Leptospira*: epidemiology in the genomic era. *PLoS Negl Trop Dis* 2007;**1**:e120.
- Levett PN. Systematics of Leptospiraceae. In: Adler B (ed.). *Leptospira and Leptospirosis*. Springer Berlin, Heidelberg, 2015, 11–20.
- Lhuillier M. Leptospiroses in Madagascar. Bacteriological and serological study. *Arch Inst Pasteur Madagascar* 1978;**46**:429–39.
- LoGiudice K, Ostfeld RS, Schmidt KA *et al.* The ecology of infectious disease: effects of host diversity and community composition on Lyme disease risk. *Proc Natl Acad Sci* 2003;**100**:567–71.
- Louette M, Meirte D, Jocque R (eds.). La faune terrestre de l'archipel des Comores. Studies in Afrotropical Zoology 2004;**293**:1-456.
- Luis AD, Hayman DTS, O'Shea TJ *et al.* A comparison of bats and rodents as reservoirs of zoonotic viruses: are bats special? *Proc R Soc B Biol Sci* 2013;**280**:20122753.
- MacArthur RH, Wilson EO. *The Theory of Island Biogeography*. Princeton University Press, 1967.
- Martin L, Pettit A. Sero-diagnostic de la spirochaetose icterohaemorrhagique. Bull Mém

- Société Médicale Hôp Paris 1918.
- Matthias MA, Díaz MM, Campos KJ *et al.* Diversity of bat-associated *Leptospira* in the Peruvian Amazon inferred by Bayesian phylogenetic analysis of 16S ribosomal DNA sequences. *Am J Trop Med Hyg* 2005;**73**:964–74.
- Matthias MA, Ricaldi JN, Cespedes M *et al.* Human leptospirosis caused by a new, antigenically unique *Leptospira* associated with a *Rattus* species reservoir in the Peruvian Amazon. *PLoS Negl Trop Dis* 2008;**2**:e213.
- McBride AJA, Athanazio DA, Reis MG et al. Leptospirosis. Curr Opin Infect Dis 2005;18:376–86.
- Morens DM, Folkers GK, Fauci AS. The challenge of emerging and re-emerging infectious diseases. *Nature* 2004;**430**:242–9.
- Morse SS, Mazet JA, Woolhouse M *et al.* Prediction and prevention of the next pandemic zoonosis. *The Lancet* 2012;**380**:1956–65.
- Myers N, Mittermeier RA, Mittermeier CG *et al.* Biodiversity hotspots for conservation priorities. *Nature* 2000;**403**:853–8.
- Nalam K, Ahmed A, Devi SM *et al.* Genetic affinities within a large global collection of pathogenic *Leptospira*: implications for strain identification and molecular epidemiology. *PLoS ONE* 2010;**5**:e12637.
- Nascimento ALTO, Ko AI, Martins E a. L *et al.* Comparative genomics of two *Leptospira interrogans* serovars reveals novel insights into physiology and pathogenesis. *J Bacteriol* 2004;**186**:2164–72.
- Naze F, Desvars A, Picardeau M *et al.* Use of a new high resolution melting method for genotyping pathogenic *Leptospira* spp. *PloS One* 2015;**10**:e0127430.
- Ochman H, Elwyn S, Moran NA. Calibrating bacterial evolution. *Proc Natl Acad Sci* 1999;**96**:12638–43.
- Ogawa H, Koizumi N, Ohnuma A *et al.* Molecular epidemiology of pathogenic *Leptospira* spp. in the straw-colored fruit bat (*Eidolon helvum*) migrating to Zambia from the Democratic Republic of Congo. *Infect Genet Evol* 2015;**32**:143–7.
- Okazaki W, Ringen LM. Some effects of various environmental conditions on the survival of *Leptospira* pomona. *Am J Vet Res* 1957;**18**:219–23.
- Olson LE. Tenrecs. Curr Biol 2013;23:R5–8.
- Olson LE, Goodman SM. Phylogeny and biogeography of the tenrecs. In: Goodman SM, Benstead JP (eds.). *The Natural History of Madagascar*. Chicago, Ill.; Bristol: University of Chicago Press; University Presses Marketing, 2006, 1235–40.
- Olson LE, Goodman SM, Yoder AD. Illumination of cryptic species boundaries in long-tailed shrew tenrecs (Mammalia: Tenrecidae; *Microgale*), with new insights into geographic variation and distributional constraints. *Biol J Linn Soc* 2004;**83**:1–22.

- Ostfeld RS. A Candide response to Panglossian accusations by Randolph and Dobson: biodiversity buffers disease. *Parasitology* 2013;**140**:1196–8.
- Ostfeld RS, Keesing F. Effects of host diversity on infectious disease. *Annu Rev Ecol Evol Syst* 2012;**43**:157–82.
- Ostfeld RS, Keesing F. Straw men don't get Lyme disease: response to Wood and Lafferty. *Trends Ecol Evol* 2013;**28**:502–3.
- Pagès F, Kuli B, Moiton M-P et al. Leptospirosis after a stay in Madagascar. J Travel Med 2015a;22:136–9.
- Pagès F, Larrieu S, Simoes J *et al.* Investigation of a leptospirosis outbreak in triathlon participants, Réunion Island, 2013. *Epidemiol Infect* 2015b:1–9.
- Pagès F, Polycarpe D, Dehecq J-S *et al.* Human leptospirosis on Reunion Island: past and current burden. *Int J Environ Res Public Health* 2014;**11**:968–82.
- Pappas CJ, Benaroudj N, Picardeau M. A replicative plasmid vector allows efficient complementation of pathogenic *Leptospira* strains. *Appl Environ Microbiol* 2015:AEM.00173–15.
- Pappas G, Papadimitriou P, Siozopoulou V *et al.* The globalization of leptospirosis: worldwide incidence trends. *Int J Infect Dis* 2008;**12**:351–7.
- Parte AC. LPSN—list of prokaryotic names with standing in nomenclature. *Nucleic Acids Res* 2013:gkt1111. [Internet source] http://www.bacterio.net/leptospira.html. Consulté le 12/10/15.
- Paterson AM, Gray RD. Host-parasite co-speciation, host switching, and missing the boat. In: Clayton DH, Moore J (eds.). *Host-Parasite Evolution: General Principles and Avian Models*. 1 edition. Oxford; New York: Oxford University Press, 1997, 236–50.
- Picardeau M. Diagnosis and epidemiology of leptospirosis. *Médecine Mal Infect* 2013;43:1–9.
- Picardeau M. Genomics, Proteomics, and genetics of *Leptospira*. In: Adler B (ed.). *Leptospira* and *Leptospirosis*. Springer Berlin, Heidelberg, 2015, 43–63.
- Picardeau M, Bulach DM, Bouchier C et al. Genome sequence of the saprophyte Leptospira biflexa provides insights into the evolution of Leptospira and the pathogenesis of leptospirosis. PLoS ONE 2008;3:e1607.
- Poux C, Madsen O, Marquard E *et al.* Asynchronous colonization of Madagascar by the four endemic clades of Primates, Tenrecs, Carnivores, and Rodents as inferred from nuclear genes. *Syst Biol* 2005;**54**:719–30.
- Plank R, Dean D. Overview of the epidemiology, microbiology, and pathogenesis of *Leptospira* spp. in humans. *Microbes Infect* 2000;**2**:1265–76.
- Rahelinirina S, Léon A, Harstskeerl RA *et al.* First isolation and direct evidence for the existence of large small-mammal reservoirs of *Leptospira* sp. in Madagascar. *PLoS ONE* 2010;5:e14111.

- Randolph SE, Dobson ADM. Pangloss revisited: a critique of the dilution effect and the biodiversity-buffers-disease paradigm. *Parasitology* 2012;**139**:847–63.
- Ratsitorahina M, Rahelinirina S, Michault A *et al.* Has Madagascar lost its exceptional leptospirosis free-like status? *PLoS ONE* 2015;**10**:e0122683.
- Ren S-X, Fu G, Jiang X-G *et al.* Unique physiological and pathogenic features of *Leptospira interrogans* revealed by whole-genome sequencing. *Nature* 2003;**422**:888–93.
- Ricaldi JN, Fouts DE, Selengut JD *et al.* Whole genome analysis of *Leptospira licerasiae* provides insight into leptospiral evolution and pathogenicity. *PLoS Negl Trop Dis* 2012;**6**:e1853.
- Riley S, Fraser C, Donnelly CA *et al.* Transmission dynamics of the etiological agent of SARS in Hong Kong: impact of public health interventions. *Science* 2003;**300**:1961–6.
- Roger M, Beral M, Licciardi S *et al.* Evidence for circulation of the Rift Valley Fever Virus among livestock in the Union of Comoros. *PLoS Negl Trop Dis* 2014;**8**:e3045.
- Ruan Y, Wei CL, Ling AE *et al.* Comparative full-length genome sequence analysis of 14 SARS coronavirus isolates and common mutations associated with putative origins of infection. *The Lancet* 2003;**361**:1779–85.
- Saier MH. Spirochetes: Evolution, genome analyses and physiology. *J Mol Microbiol Biotechnol* 2000;**2(4)**:339.
- Saito M, Villanueva SYAM, Kawamura Y *et al. Leptospira idonii* sp. nov., isolated from environmental water. *Int J Syst Evol Microbiol* 2013;**63**:2457–62.
- Schmidt KA, Ostfeld RS. Biodiversity and the dilution effect in disease ecology. *Ecology* 2001;**82**:609–19.
- Silva ÉF, Santos CS, Athanazio DA *et al.* Characterization of virulence of *Leptospira* isolates in a hamster model. *Vaccine* 2008;**26**:3892–6.
- Simmons NB. Order Chiroptera. In: Wilson DE & Reeder DM (eds.). *Mammal Species of the World: A Taxonomic and Geographic Reference, 3rd Edition*. Johns Hopkins University Press. Baltimore, Maryland, 2005, 312–529.
- Simon F, Morand G, Roche C *et al.* Leptospirosis in a French traveler returning from Mauritius. *J Travel Med* 2012;**19**:69–71.
- Slack AT, Khairani-Bejo S, Symonds ML *et al. Leptospira kmetyi* sp. nov., isolated from an environmental source in Malaysia. *Int J Syst Evol Microbiol* 2009;**59**:705–8.
- Smythe LD, Smith IL, Smith GA *et al.* A quantitative PCR (TaqMan) assay for pathogenic *Leptospira* spp. *BMC Infect Dis* 2002;**2**:13.
- Soarimalala V, Goodman SM. *Les Petits Mammifères de Madagascar*. Antananarivo, Madagascar : Association Vahatra, 2011.

- Socolovschi C, Angelakis E, Renvoisé A *et al.* Strikes, flooding, rats, and leptospirosis in Marseille, France. *Int J Infect Dis* 2011;**15**:e710–5.
- Taraschewski H. Hosts and parasites as aliens. *J Helminthol* 2006;**80**:99–128.
- Teeling EC, Springer MS, Madsen O *et al.* A molecular phylogeny for bats illuminates biogeography and the fossil record. *Science* 2005;**307**:580–4.
- Thaipadunpanit J, Chierakul W, Wuthiekanun V *et al.* Diagnostic accuracy of Real-Time PCR assays targeting 16S rRNA and lipl32 genes for human leptospirosis in Thailand: A Case-Control Study. *PLoS ONE* 2011;**6**:e16236.
- Thaipadungpanit J, Wuthiekanun V, Chierakul W et al. A dominant clone of Leptospira interrogans associated with an outbreak of human leptospirosis in Thailand. PLoS Negl Trop Dis 2007;1:e56.
- Tollenaere C, Brouat C, Duplantier J *et al.* Phylogeography of the introduced species *Rattus* rattus in the western Indian Ocean, with special emphasis on the colonization history of Madagascar. *J Biogeogr* 2010;**37**:398–410.
- Tortosa P, Dsouli N, Gomard Y *et al.* Evolutionary history of Indian Ocean Nycteribiid bat flies mirroring the ecology of their hosts. *PLoS ONE* 2013;**8**:e75215.
- Tortosa P, Pascalis H, Guernier V *et al.* Deciphering arboviral emergence within insular ecosystems. *Infect Genet Evol J Mol Epidemiol Evol Genet Infect Dis* 2012, DOI: 10.1016/j.meegid.2012.03.024.
- Trueba G, Zapata S, Madrid K *et al.* Cell aggregation: a mechanism of pathogenic *Leptospira* to survive in fresh water. *Int Microbiol Off J Span Soc Microbiol* 2004;7:35–40.
- Tulsiani SM, Cobbold RN, Graham GC *et al.* The role of fruit bats in the transmission of pathogenic leptospires in Australia. *Ann Trop Med Parasitol* 2011;**105**:71–84.
- Vinetz JM, Wilcox BA, Aguirre A *et al.* Beyond disciplinary boundaries: leptospirosis as a model of incorporating transdisciplinary approaches to understand infectious disease emergence. *EcoHealth* 2005;**2**:291–306.
- United Nations. *World Populations Prospects: The 2015 Revision*. United Nations Department of Economic and Social Affairs, Populations Division. United Nations Department of public Information. [Internet source] http://www.un.org/apps/news/story.asp?NewsID=51526#.VjMxRaQbK_k. Consulté le 10/10/15.
- Vittecoq M, Roche B, Prugnolle F et al. Les maladies infectieuses. Paris: SOLAL, 2015.
- Warren BH, Bermingham E, Prys-Jones RP *et al.* Tracking island colonization history and phenotypic shifts in Indian Ocean bulbuls (Hypsipetes: Pycnonotidae). *Biol J Linn Soc* 2005;**85**:271–87.
- Weekes CC, Everard COR, Levett PN. Seroepidemiology of canine leptospirosis on the island of Barbados. *Vet Microbiol* 1997;**57**:215–22.

- WHO. SRAS: Interruption des chaînes de transmission, 2003. [Internet source] http://www.who.int/features/2003/07/fr/. Consulté le 10/10/15.
- WHO. Leptospirosis worldwide. *Wkly Epidemiol Rec* 1999;74:237–44. [Internet source] http://www.who.int/docstore/wer/pdf/1999/wer7429.pdf. Consulté le 08/10/15.
- Widmann M. Impact of large-scale environmental features changes on host-parasite interaction in marine and freshwater ecosystems. *Biosci Master Rev Dép Biol Ecole Norm Supér Lyon* 2012.
- Wilkinson DA, Melade J, Dietrich M *et al.* Highly diverse Morbillivirus-Related Paramyxoviruses in wild fauna of the Southwestern Indian Ocean islands: evidence of exchange between introduced and endemic small mammals. *J Virol* 2014;**88**:8268–77.
- Wilkinson DA, Temmam S, Lebarbenchon C *et al.* Identification of novel paramyxoviruses in insectivorous bats of the Southwest Indian Ocean. *Virus Res* 2012;**170**:159–63.
- Wilson ME. Travel and the emergence of infectious diseases. *Emerg Infect Dis* 1995;1:39–46.
- Wolfe ND, Dunavan CP, Diamond J. Origins of major human infectious diseases. *Nature* 2007;447:279–83.
- Wong M, Katz AR, Li D *et al. Leptospira* infection prevalence in small mammal host populations on three Hawaiian islands. *Am J Trop Med Hyg* 2012;**87**:337–41.
- Wong S, Lau S, Woo P *et al.* Bats as a continuing source of emerging infections in humans. *Rev Med Virol* 2007;**17**:67–91.
- Wood CL, Lafferty KD. Biodiversity and disease: a synthesis of ecological perspectives on Lyme disease transmission. *Trends Ecol Evol* 2013;**28**:239–47.
- Wood JLN, Leach M, Waldman L *et al.* A framework for the study of zoonotic disease emergence and its drivers: spillover of bat pathogens as a case study. *Philos Trans R Soc B Biol Sci* 2012;**367**:2881–92.
- Woolhouse MEJ, Gowtage-Sequeria S. Host range and emerging and reemerging pathogens. *Emerg Infect Dis* 2005;**11**:1842–7.
- Woolhouse MEJ, Taylor LH, Haydon DT. Population biology of multihost pathogens. *Science* 2001;**292**:1109–12.
- Yersin C, Bovet P, Mérien F *et al.* Human leptospirosis in the Seychelles (Indian Ocean): a population-based study. *Am J Trop Med Hyg* 1998;**59**:933–40.
- Yoder AD, Nowak MD. Has vicariance or dispersal been the predominant biogeographic force in Madagascar? Only time will eell. *Annu Rev Ecol Evol Syst* 2006;**37**:405–31.
- Yssouf A, Lagadec E, Bakari A *et al.* Colonization of Grande Comore Island by a lineage of *Rhipicephalus appendiculatus* ticks. *Parasit Vectors* 2011;**4**:38.
- Zhang C, Yang H, Li X et al. Molecular typing of pathogenic Leptospira serogroup Icterohaemorrhagiae strains circulating in China during the past 50 Years. PLoS Negl

Trop Dis 2015;**9**:e0003762.

Zuerner RL. Physical map of chromosomal and plasmid DNA comprising the genome of *Leptospira interrogans*. *Nucleic Acids Res* 1991;**19**:4857–60.

Valorisations scientifiques

1. Publications utilisées dans ce manuscrit

- Article 1: Gomard Y, Silai R, Hoarau G, Bon K, Gonneau F, Yssouf A, Michault A, Dellagi K and Tortosa P. (2014) Serologic evidence of Leptospirosis in humans, Union of the Comoros, 2011. Emerging Infectious Diseases, 20, 720–722.
- Article 2: Lagadec E*, Gomard Y*, Guernier V, Dietrich M, Pascalis H, Temmam S,
 Ramasindrazana B, Goodman S M, Tortosa P and Dellagi K. (2012) Pathogenic
 Leptospira spp. in bats, Madagascar and Union of the Comoros. Emerging
 Infectious Diseases, 18, 1696–1698.

 * Co-premiers auteurs
- Article 3: Gomard Y, Dietrich M, Wieseke N, Ramasindrazana B, Lagadec E, Goodman S M, Dellagi K and Tortosa P. (2015) Malagasy bats shelter a considerable diversity of pathogenic *Leptospira* displaying a strog host-specifity.
 En révision dans la revue FEMS Microbiology Ecology.
- Article 4: Lagadec E, Gomard Y, Le Minter G, Cordonin C, Cardinale E, Ramasindrazana B, Dietrich M, Goodman S M, Tortosa P and Dellagi K. (2015) A wild small An introduced wild mammal species (*Tenrec*: Tenrecidae) to Mayotte Island, western Indian Ocean, is an important reservoir of the human pathogenic *Leptospira mayottensis. Soumis à la revue mBio*.

2. Autres publications en rapport avec la thèse

- Pagès F, Larrieu S, Simoes J, Lenabat P, Kurtkowiak B, Guernier V, Le Minter G, Lagadec E, Gomard Y, Michault A, Jaffar-Bandjee M-C, Dellagi K, Picardeau M, Tortosa P and Filleul L. (2015) Investigation of a leptospirosis outbreak in triathlon participants, Réunion Island, 2013. *Epidemiology and Infection*, 1–9.
- Dietrich M, **Gomard Y**, Lagadec E, Ramasindrazana B, Le Minter G, Guernier V, Benlali A, Rocamora G, Markotter W, Goodman S M, Dellagi K, Tortosa P. Interplay of host specificity and biogeography in *Leptospira* diversity in wild animals occurring in the western Indian Ocean region.
 - En préparation pour soumission à PloS Neglected Tropical Disease.

Guernier V, Lagadec E, Cordonin C, Le Minter G, **Gomard Y**, Pagès F, Jaffar-Bandjee M-C, Michault A, Tortosa P, Dellagi K. Human leptospirosis on Reunion Island, Indian Ocean: are rodents the (only) ones to blame?

En préparation pour soumission à PloS Neglected Tropical Disease.

3. Autres publications

- Mélade J, Wieseke N, Ramazindrasana B, Flores O, Lagadec E, **Gomard Y**, Goodman S M, Dellagi K and Pascalis H. An eco-epidemiological study of Morbilli-related paramyxovirus infection in Madagascar bats reveals host-switching as the dominant macro-evolutionary mechanism.
 - Soumis à Scientific Reports Nature.
- Wilkinson D A, Duron O, Cordonin C, **Gomard Y**, Ramasindrazana B, Mavingui P, Goodman S M, Dellagi K and Tortosa P. The bacteriome of bat flies (Nycteribiidae)
- from the Malagasy region: a community shaped by host-ecology, bacterial transmission mode, and host-vector specificity.
 - Soumis à Applied and Environmental Microbiology.
- Larsen P A, Hayes C E, Wilkins M A, **Gomard Y**, Sookhareea R, Yoder A D and Goodman S M. (2014) Population genetics of the Mauritian Flying Fox, *Pteropus niger. Acta Chiropterologica*, 16, 293–300.
- Tortosa P, Dsouli N, **Gomard Y**, Ramasindrazana B, Dick C.W and Goodman S.M. (2013) Evolutionary history of Indian Ocean nycteribiid bat flies mirroring the ecology of their hosts. *PLoS ONE*, 8, e75215.

4. Congrès nationaux et internationaux

Scientific Days on Emerging Infectious Diseases in the South-Western Indian Ocean de Run-Emerge, 7-8 November 2013, University of La Réunion, France.

Serological evidence of *Leptospira* infection in human populations in the Union of The Comoros. **Yann Gomard**, Rahamatou Silai, Géraldine Hoarau, Ketty Bon, Florelle Gonneau, Amina Yssouf, Alain Michault, Koussay Dellagi and Pablo Tortosa.

The 12th African Small Mammal Symposium, 12 to 17 April, Mantasoa, Madagascar.

Pathogenic *Leptospira* (Spirochaetales, Leptospiraceae) show a strict host specificity for Malagasy bat species. **Yann Gomard**, Muriel Dietrich, Nicolas Wieseke, Beza Ramasindrazana, Erwan Lagadec, Steven M. Goodman, Koussay Dellagi and Pablo Tortosa.

Séminaire de restitution du POE 2.10 PCOT FED-FEDER Biodiversité, du 2 au 5 Juin 2015, Université de La Réunion, France.

Diversity of pathogenic *Leptospira* in bats from Madagascar. **Yann Gomard**, Muriel Dietrich, Nicolas Wieseke, Beza Ramasindrazana, Erwan Lagadec, Steven M. Goodman, Koussay Dellagi and Pablo Tortosa.

The 9th Scientifc Meeting of International Leptospirosis Society, 7-10 October 2015, Semarang, Indonesia.

Pathogenic *Leptospira* sheltered by Malagasy bats display stringent host-specificity. **Yann Gomard**, Muriel Dietrich, Nicolas Wieseke, Beza Ramasindrazana, Erwan Lagadec, Steven M. Goodman, Koussay Dellagi and Pablo Tortosa.



LETTRE D'ENGAGEMENT DE NON-PLAGIAT

Je, soussigné **Yann GOMARD**, en ma qualité de doctorant de l'Université de La Réunion, déclare être conscient que le plagiat est un acte délictueux passible de sanctions disciplinaires. Aussi, dans le respect de la propriété intellectuelle et du droit d'auteur, je m'engage à systématiquement citer mes sources, quelle qu'en soit la forme (textes, images, audiovisuel, internet), dans le cadre de la rédaction de ma thèse et de toute autre production scientifique, sachant que l'établissement est susceptible de soumettre le texte de ma thèse à un logiciel anti-plagiat.

Fait à Saint Denis, le 10/11/15

Signature:

Extrait du Règlement intérieur de l'Université de La Réunion

(validé par le Conseil d'Administration en date du 11 décembre 2014)

Article 9. Protection de la propriété intellectuelle - Faux et usage de faux, contrefaçon, plagiat

L'utilisation des ressources informatiques de l'Université implique le respect de ses droits de propriété intellectuelle ainsi que ceux de ses partenaires et plus généralement, de tous tiers titulaires de tes droits.

En conséquence, chaque utilisateur doit :

- utiliser les logiciels dans les conditions de licences souscrites ;
- ne pas reproduire, copier, diffuser, modifier ou utiliser des logiciels, bases de données, pages Web, textes, images, photographies ou autres créations protégées par le droit d'auteur ou un droit privatif, sans avoir obtenu préalablement l'autorisation des titulaires de ces droits.

La contrefaçon et le faux

Conformément aux dispositions du code de la propriété intellectuelle, toute représentation ou reproduction intégrale ou partielle d'une œuvre de l'esprit faite ans le consentement de son auteur est illicite et constitue un délit pénal.

L'article 444-1 du code pénal dispose : « Constitue un faux toute altération frauduleuse de la vérité, de nature à cause un préjudice et accomplie par quelque moyen que ce soit, dans un écrit ou tout autre support d'expression de la pensée qui a pour objet ou qui peut avoir pour effet d'établir la preuve d'un droit ou d'un fait ayant des conséquences juridiques ».

L'article L335_3 du code de la propriété intellectuelle précise que : « Est également un délit de contrefaçon toute reproduction, représentation ou diffusion, par quelque moyen que ce soit, d'une œuvre de l'esprit en violation des droits de l'auteur, tels qu'ils sont définis et réglementés par la loi. Est également un délit de contrefaçon la violation de l'un des droits de l'auteur d'un logiciel (...) ».

Le plagiat est constitué par la copie, totale ou partielle d'un travail réalisé par autrui, lorsque la source empruntée n'est pas citée, quel que soit le moyen utilisé. Le plagiat constitue une violation du droit d'auteur (au sens des articles L 335-2 et L 335-3 du code de la propriété intellectuelle). Il peut être assimilé à un délit de contrefaçon. C'est aussi une faute disciplinaire, susceptible d'entraîner une sanction.

Les sources et les références utilisées dans le cadre des travaux (préparations, devoirs, mémoires, thèses, rapports de stage...) doivent être clairement citées. Des citations intégrales peuvent figurer dans les documents rendus, si elles sont assorties de leur référence (nom d'auteur, publication, date, éditeur...) et identifiées comme telles par des guillemets ou des italiques.

Les délits de contrefaçon, de plagiat et d'usage de faux peuvent donner lieu à une sanction disciplinaire indépendante de la mise en œuvre de poursuites pénales.